



ACALED20



Features

Compact and economic polycarbonate LED floodlight.

Only suitable for semi commercial applications.

Warm and Cool white options.

20W LED exceeds performance of 20W HQI.

Polished faceted reflector and textured glass for optimum performance.

Pre-wired with 1m of rubber insulated cable for ease of installation.

LED lifespan L70 20,000 hours.

Non-dimmable.

General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP65
IK Rating	IK07
Class Protection	2
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Warranty (Years)	2
CE Mark	Yes
Width (mm)	162
Height (mm)	155
Depth (mm)	59


Technical Information

Wattage	20W
Lumens Delivered	1924lm
Lm/W	96lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	-15°C to 40°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	No
Suitable for traverse mounting	No
Suitable for light-track mounting	No
Adjustability	Swivelling
With movement sensor	No
With light sensor	No
With light source	Yes
Material housing	Plastic
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Light distributor	Reflector
Degree of protection (IP)	IP65
Impact strength	IK07
Protection class	II
Max. system power	20 W
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Rated luminous flux acc. IEC 62722-2-1	1924 lm
Lamp efficacy	96 lm/W

Width	59 mm
Height/depth	155 mm
Length	162 mm

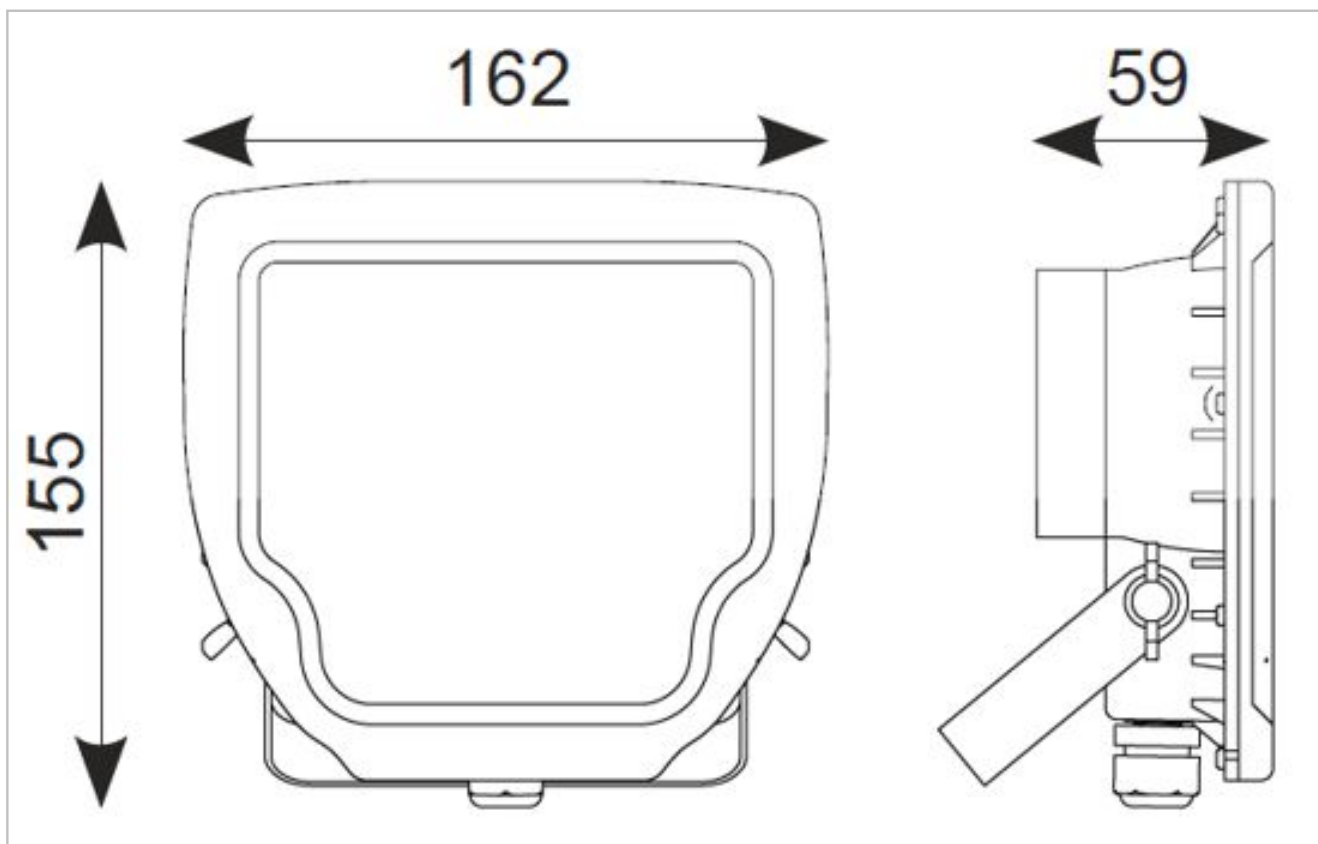

Datasheet generated from <https://onetimepim.com> last updated Friday, February 18, 2022 12:23:45 PM