



MASTER VALUE LEDspot MV



MASTER LED spot VLE DT 4.9-50W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data


General information	
Cap-Base	GU10 [GU10]
CE mark	Yes
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000
Flux measurement reference	Narrow Cone
Tier	MASTER Value
Light technical	
Color Code	922-927 [CCT of 2200K-2700K]

Beam Angle (Nom)	36 °
Luminous Flux (Nom)	355 lm
Luminous Intensity (Nom)	650 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	80.61 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	355 lm

MASTER VALUE LEDspot MV


Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	4.9 W
Lamp Current (Nom)	27 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Shape	PAR16 [PAR 2 inch/50mm]

Dimensional drawing

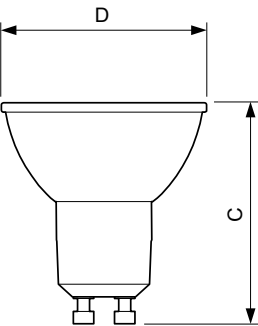

MASTER LED spot VLE DT 4.9-50W GU10 927 36D


Photometric data

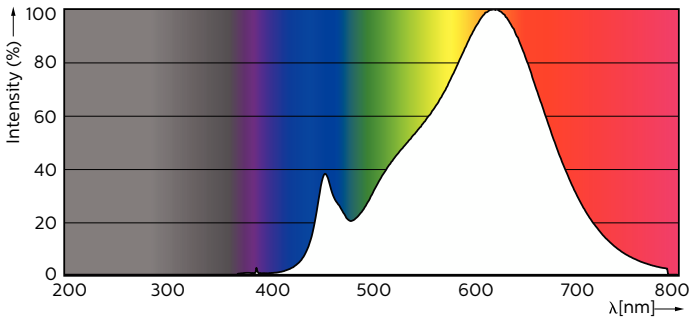

Spectral Power Distribution Colour


Approval and application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	5 kWh
EPREL Registration Number	400288
Product data	
Full product code	871869670811800
Order product name	MASTER LED spot VLE DT 4.9-50W GU10 927 36D
EAN/UPC - Product	8718696708118
Order code	929001350302
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001350302
Net Weight (Piece)	0.038 kg

Product	D	C
MASTER LED spot VLE DT 4.9-50W GU10 927 36D	50 mm	54 mm



Light Distribution Diagram



Photometric data



Calcutt Photometrics 4.3 Philips Lighting B.V. Page 15

Accent Lighting Spots

Lifetime

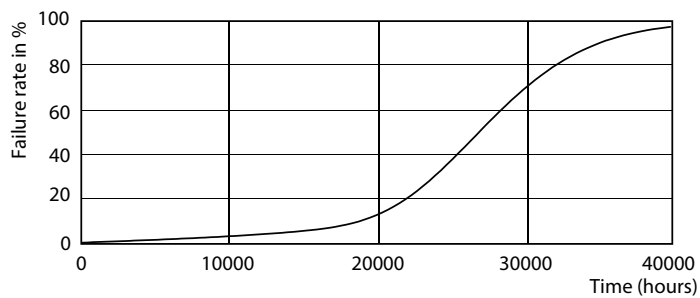

25K LED

25K LMP

