

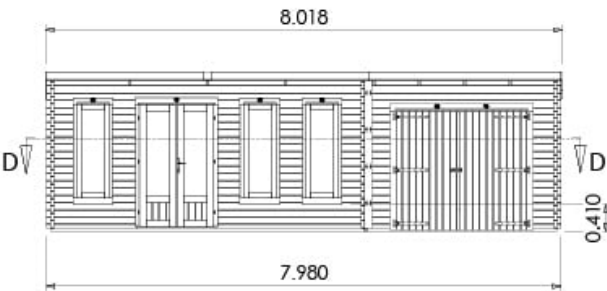


EvilGenius Log Cabin and Workshop

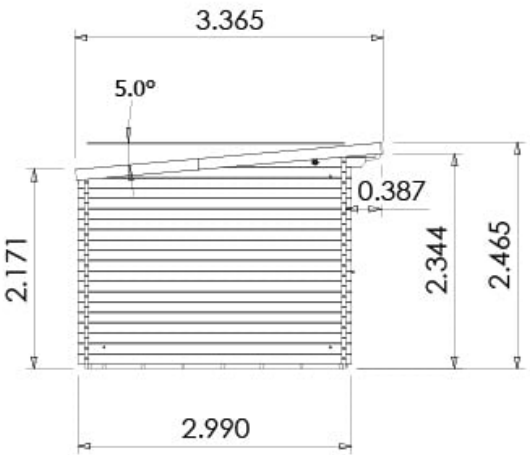

Established 1994

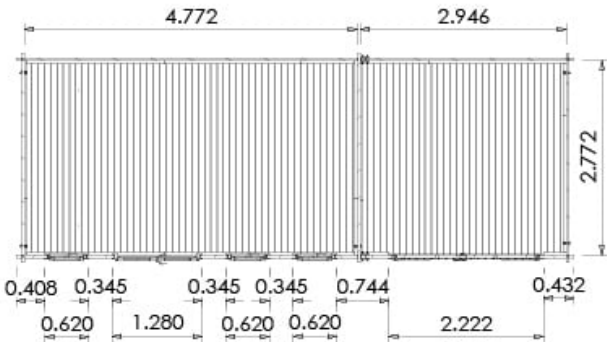

EvilGenius Log Cabin and Workshop



Established 1994

Specifications:

- **Please Note:** All sizes quoted are nominal
- **Overall External Dimensions:** 8.018m x 3.365m (26' 4" x 11' 0")
- **External Width:** 7.98m (26' 2")
- **External Depth:** 2.99m (9' 10")
- **Main Room Internal Width:** 4.772m (15' 8")
- **Main Room Internal Depth:** 2.772m (9' 1")
- **Main Room Internal Area (m²):** 13.228m²
- **Workshop Internal Width:** 2.946m (9' 8")
- **Workshop Internal Area (m²):** 8.166m²
- **Ridge Height:** 2.465m (8' 1")
- **Internal Eaves Height Front (to under the roof boards):** 2.323m (7' 7")
- **Internal Eaves Height Front (to under the roof purlins):** 2.182m (7' 2")
- **Internal Eaves Height Back (to under the roof boards):** 2.08m (6' 10")
- **Internal Eaves Height Back (to under the roof purlins):** 1.939m (6' 4")
- **Roof Overhang:** 0.387m (1' 3")
- **Roof Covering Options:** None or Felt
- **Roof Thickness:** 19mm Tongue & Groove
- **Building Style:** Strong Interlocking Tongue & Groove Logs
- **Walls:** 100% Slow Grown Spruce
- **Wall U-Value (W/m²k):** 1.93 W/m²K
- **Floor Thickness:** 19mm Tongue & Groove
- **Floor Bearers:** Pressure Treated for Longevity
- **Door Style:** French Doors
- **Door Locking System:** Industry Leading 6 Point Lock - 2 Cams, Latch & Hook Bolt, 2 Shootbolts
- **Main Door Height (Walkthrough Height):** 1.82m (5' 11")
- **Main Door Width (Walkthrough Width):** 1.11m (3' 7")
- **Workshop Door Style:** Wooden Barn Doors
- **Workshop Door Locking System:** Shootbolts
- **Workshop Door Height (Walkthrough Height):** 1.79m (5' 10")

EvilGenius Log Cabin and Workshop



Established 1994

- **Workshop Door Width (Walkthrough Width)** 1.992m (6' 6")
- **Windows:** 3 Opening Windows
- **Window Locking System:** Secure Multi-Point Locking with Espagnolettes
- **Window Opening Size:** 0.43m x 1.37m (1' 4" x 4' 5")
- **Glazing Material:** 4mm Toughened Glass
- **Glazing Options:** 24mm Double Glazing Included as Standard!
- **Included as Standard:** Plastic Vents, Adjustable Storm Braces, Assembly Instructions and Fixings
- **Approx. DIY Assembly Time:** 2 Days. This time is an approximation, based on two people building the basic product with no added extras. Assembly time may vary with additional items such as roof shingles, or external circumstances like the weather
- **Please Note:** All wood is planed, pre-cut (with the exception of trims), and pre notched for quick and easy construction