

1/2 HOUR SELF CLOSING FIRE DOOR!
150 MIN STEP DOWN. INTUMESCENT
STRIP. HIGH TEMPERATURE DOOR
FURNITURE

LIVING

NEW
DOORS

INSULATE

KITCHEN LAYOUT
TO BE AGREED

(H/D) HEAT
DETECTOR

X X DEEP
CONCRETE PADSTONE

2 NO X X KG OBS

WIDEN OPENING (OPTIONAL)
2 NO X X KG OBS

EXISTING WALL RETAINED IF VIABLE.
CONFIRM INSULATION

X X DEEP PADSTONE

UTILITY ROOM INSULATION IMPROVED.

CEILING REMOVED & LIFTED. 122X47
SOISTS @ 400 CENTRES. 100 FIBREGLASS
BETWEEN SOISTS. 170MM CROSSWISE.
FOIL BACK PLASTERBOARD & SKIM.


SOUND DRY BRICK WALLS. FOIL BACK PLASTER
BOARD & SKIM ON 75MM KINGSPAN OR
ANALISED BATTENS ON STRIP DPC.

FLOOR. DENSE, FLOORING GRADE CHIP-
BOARD ON 75MM CELOTEX ON 1200
VISQUEEN ON SOUND, DRY CONCRETE
FLOOR


NEW INSULATED CATNIC LITTEL OVER
DOOR/WINDOW.

3.6
m

RIDGE
LIVING

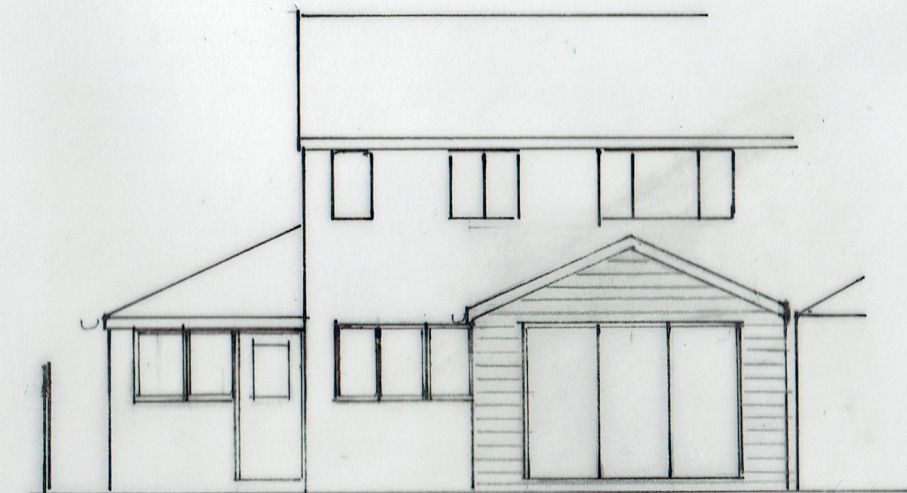


REAR ELEVATION

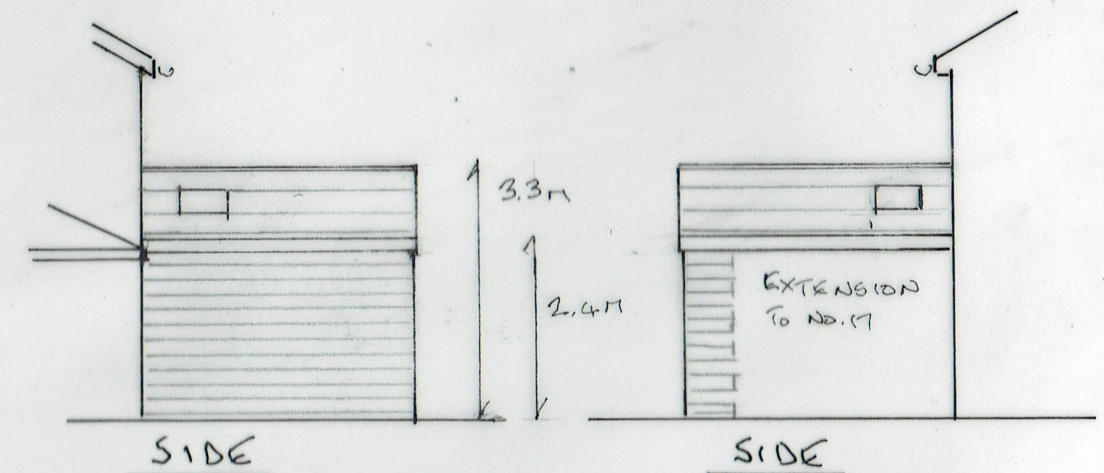

SIDE

SIDE

2 PROPOSED PLAN



SCALE 1:50 & 1:100 @ A3

28/09/20

20/580/02

SINGLE STOREY REAR EXTENSION
19 DANESMOOR DRIVE BURY BLA 6ER