


A. MENU CASE

A1 poster frame  
illuminated 1w 122 lumens 6500k  
fixed directly to brickwork

Static illumination with even  
and consistent glow

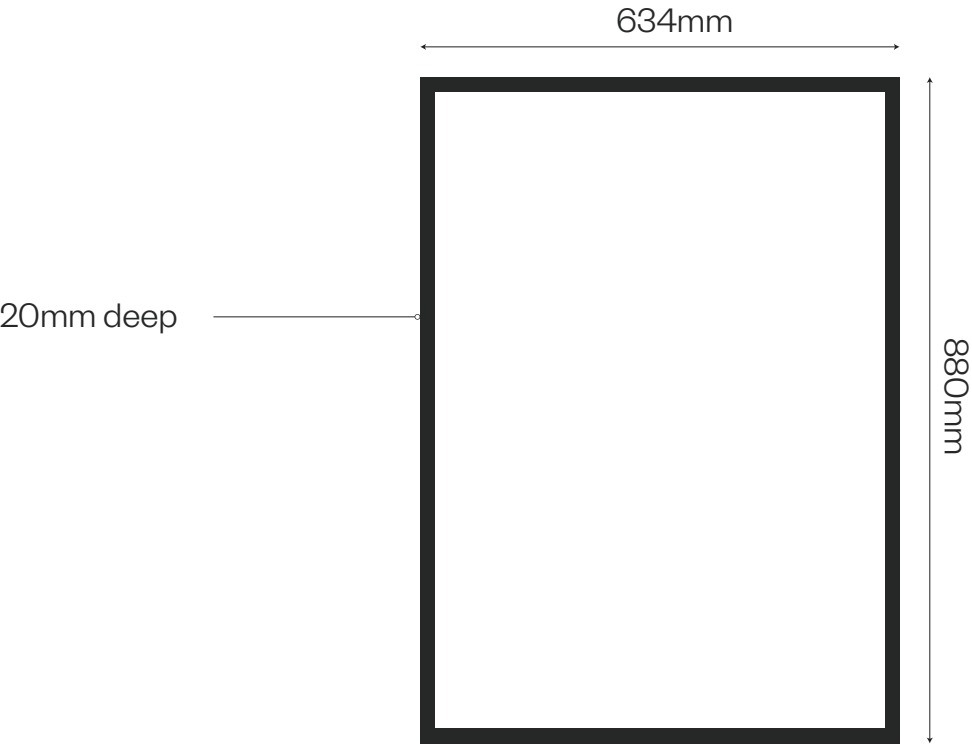

ELEVATION A

Fitted 1400mm from FFL  
to underside. Any wires to be  
fed through the reverse into  
unit.



CROWN OPTO S1+



ITEM DESCRIPTION

Crown OPTO S1+ is a new solution for uniform illumination of single-sided lightboxes and bigger channel letters with depth ranging from 80 to 140 mm. Due to the new optics, we have used with this module, light is distributed more evenly inside the lightboxes or channel letters. As these modules have a better light distribution pattern and longer wires, they can be installed with a 250 mm step. To make the installation work easy and fast, these modules come with the adhesive containing a finger lift edge liner for convenient removal of the protective layer. Crown OPTO S1+ modules have 5 years (24/7) warranty with L80 for 50 000 hours.

APPLICATION

- Single-sided lightboxes and bigger channel letters
- Recommended depth 80 – 140 mm

FEATURES & BENEFITS

- Efficiency up to 122 lm/W
- 250 mm distance between centers of modules
- IP67 protection class
- L80 50, 000 h lifetime
- 5-year 24/7 warranty



5 years warranty

80 - 140 mm

160°

6500 K

122 lm


1.0 W

IP 67

L80 50000 h


GENERAL SPECIFICATIONS

|                       |                        |
|-----------------------|------------------------|
| SUPPLY VOLTAGE        | 12 VDC                 |
| POWER                 | 1.0 W                  |
| RECOMMENDED DEPTH     | from 80 to 140 mm      |
| CC DISTANCE           | 250 mm                 |
| BINNING               | 3 SDCM                 |
| OPERATING TEMPERATURE | -30 °C ~ +50 °C        |
| STORAGE TEMPERATURE   | +5°C ~ +70 °C          |
| STORAGE CONDITIONS    | Relative humidity <50% |
| CERTIFICATION         | CE and RoHS pending    |
| IP CLASS              | IP67                   |
| LIFETIME              | L80 50,000h            |
| WARRANTY              | 5 years (24/7)*        |



\* Dimensions are in mm

LIGHT DISTRIBUTION GRAPH



Beam angle: 160°

ORDERING INFORMATION

| SKU                 | POWER, W | LUMEN OUTPUT, LM | COLOR TEMP. | STATUS   |
|---------------------|----------|------------------|-------------|----------|
| BMOP-SP-LE2A160B5E1 | 1.0      | 122              | 6500 K      | IN STOCK |

PACKAGING INFORMATION

| CHAIN            | BAG              | BOX               |
|------------------|------------------|-------------------|
| 35 pcs (0.42 kg) | 70 pcs (0.85 kg) | 840 pcs (10.6 kg) |

© 2019. All rights reserved BatiLED, UAB. Specifications are subject to change without notice.

www.perspex.co.uk/BatiLED

PERSPEX

Distribution Ltd

ILLUMINATED MENU CASE

THE FIREPIT  
BURY

Signage Drawings

Scale 1:10

Date 13/08/24  
Drawing Type Proposal  
Drawn by KL  
Revision -

FRIDAY&