


ALL DIMENSIONS TO BE VERIFIED AT SITE PRIOR TO COMMENCEMENT OF WORKS BY APPOINTED CONTRACTOR.ANY DISCREPANCY IN THE DRAWING MUST BE REPORTED TO KEVIN FOEY.WRITTEN DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALED OFF DIMENSIONS.


ELECTRICAL SPECIFICATION
THE INSTALLATION WILL BE DESIGNED,INSTALLED,INSPECTED AND TESTED TO THE STANDARDS
REQUIRED BY PART'P' OF THE BUILDING REGULATIONS.
A'COMPETANT' ELECTRICIAN WILL UNDERTAKE THE WORK AND AN INSTALLATION CERTIFICATE
WILL BE PROVIDED.
PRIOR TO COMMISSIONING THE INSTALLATION WILL BE TESTED BY AN ELECTRICIAN COMPETANT
IN TESTING HOLDING A SUITABLE QUALIFICATION.
TESTING WILL BE COMPREHENSIVE WITH TESTS FOR CONTINUITY,AND EARTH LOOP IMPEDANCE.
ANY INSTALLATION UNDERTAKEN BY SOMEONE WHO IS NOT REGISTERED WITH NICEIC OR ECA
MUST PROVIDE AN INSTALLATION CERTIFICATE TOGETHER WITH A TEST CERTIFICATE PREPARED
BY A MEMBER OF THE NICEIC OR ECA.
THE PROPOSED DOMESTIC ELECTRICAL INSTALLATION WILL BE INSTALLED IN ACCORDANCE
WITH BS 7671 AND THE CURRENT 17th EDITION OF THE WIRING REGULATIONS.
THE BEST PRACTISE ENDORSED WITH THE IEE ON SITE GUIDE WILL BE APPLIED.
WORK TO HEATING/HOT WATER SYSTEM BY A GAS SAFE REGISTERED PLUMBER.

NEW DOUBLE GLAZED WINDOWS TO HAVE INNER PANE OF 'K' GLASS
AND MINIMUM GAP BETWEEN PANES 16mm.(argon filled)Uvalue 1.6
NEW BEDROOM WINDOWS TO HAVE ESCAPE WINDOW 0.33M2
WITH MINIMUM WIDTH OF ESCAPE WINDOW 450mmx740mm height to achieve 0.33M2.
BEAM OVER NEW EXTERNAL WINDOWS AND DOORS CATNIC COMBINED LINTOLS.
NEW GLAZING IN CRITICAL LOCATIONS TO COMPRISE TOUGHENED SAFETY GLASS
TO BS6206

Sand and cement rendered.

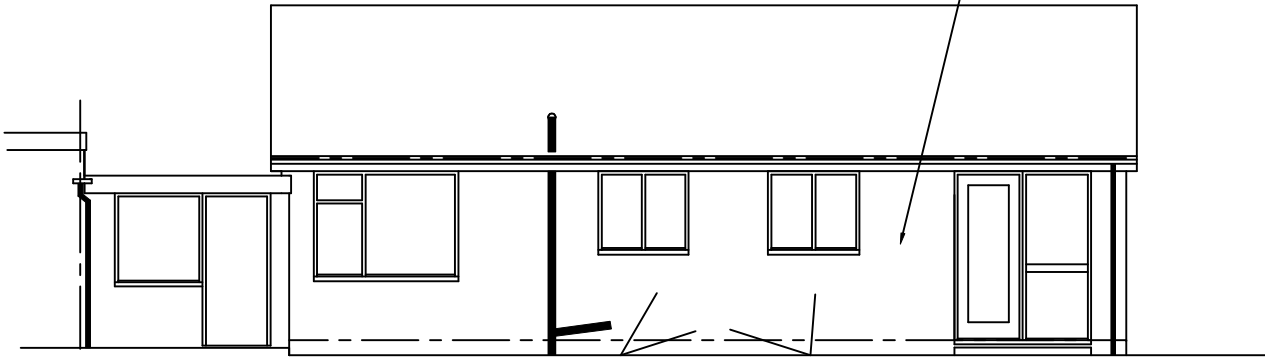


EXISTING REAR ELEVATION

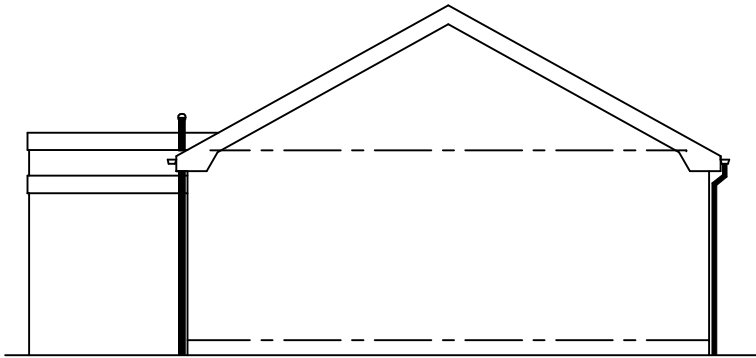


EXISTING SIDE ELEVATION

Sand and cement rendered.

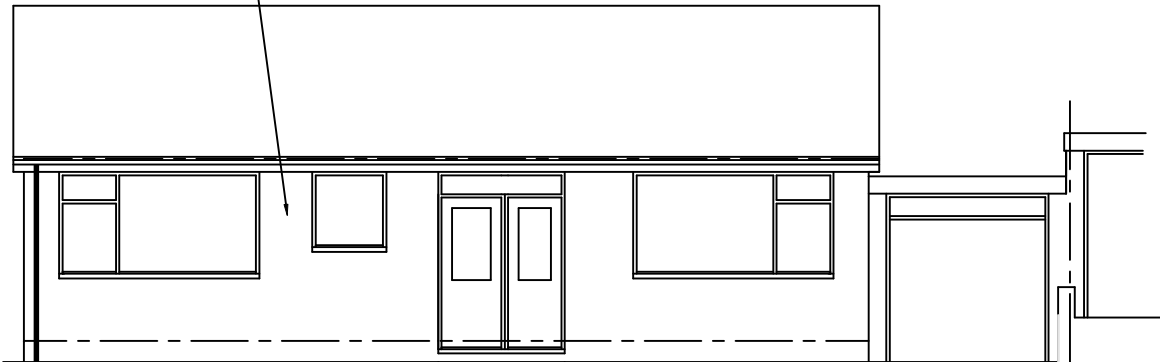

EXISTING FRONT ELEVATION

Sand and cement rendered.

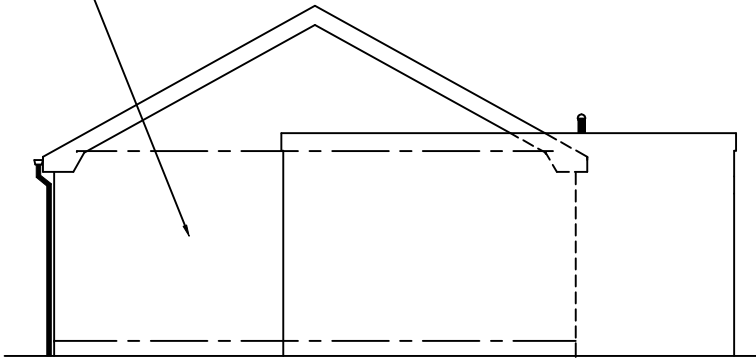

EXISTING SIDE ELEVATION

DRAWING No 3 OF 7 DRAWING'S

PROPOSED REAR GROUND FLOOR
BEDROOM & PLAYROOM EXTENSION AT-
No 28 EUXTON CLOSE,
BURY,
BL8 2HY.
FOR-MR MARK HAVENS.

SCALE:- 1:100 DATE:- SEPT 2024

kevin foey
BUILDING
DESIGN CONSULTANTS

28 CHEW VALE,
GREENFIELD,
OLDHAM, OL3 7EQ.
TEL- 0798 676 1559

NO WORK TO COMMENCE BEFORE PLANNING PERMISSION(IF REQUIRED)HAS BEEN GRANTED.
NO WORK TO COMMENCE UNTIL BUILDING REGULATIONS APPROVAL HAS BEEN GRANTED.
KEVIN FOEY ACCEPTS NO RESPONSIBILITY FOR WORK UNDERTAKEN BEFORE BUILDING REGULATION APPROVAL OBTAINED.
ALL SIZES AND DIMENSIONS TO BE CHECKED AND VERIFIED BY THE CONTRACTOR BEFORE WORK COMMENCED
AND ANY DIFFERENCE TO THIS PLAN TO BE REPORTED TO KEVIN FOEY BEFORE WORK COMMENCES.
IF THE WORK FALLS WITHIN THE PROVISIONS OF THE PARTY WALL ACT 1996 IT IS IMPORTANT THAT THE CLIENT
SERVES NOTICE TO THE OWNERS OF THE ADJOINING PROPERTY OF THE INTENTION TO BUILD TWO MONTHS BEFORE
THE COMMENCEMENT DATE AND THAT WRITTEN PERMISSION IS OBTAINED.ALL PROVISIONS OF THE PARTY WALL ACT 1966
(WHERE NECESSARRY TO BE ADHERED TO.