



Northern Fan Supplies Ltd

Technical Data Sheet JM Aerofoil



Quotation Number	:	Project Code	:
Project Name	:	Customer	:
Item Reference:	:	Date:	: Friday, October 20, 2017

Fan Code	50JM/20/4/6/32
Fan Diameter / Size	500 Size / mm
Blades	6
Fan Speed	1420 rpm
Velocity	9.5 m/s
Blade Angle	32°
Installation Type / Form of Running	C / B
Fan Casing	Long

Requested Duty	1.85m³/s @ 165 Pa (static)
Outlet Dynamic Pressure	54 Pa

Duty Shaft Power	0.609 kW
Max Shaft Power	0.626 kW
Total Efficiency	66.8 %

Motor Frame	CT9 [Class F]
Motor Rating	0.680 kW
Full Load Current	4.8 A
Starting Current	11 A
Motor Mounting	Pad
Electrical Supply	220-240 Volts 50 Hz 1 Phase
Start Type	DOL
Motor Winding	Standard
Enclosure	Standard All

ErP [FMEG] Rating	N 40 (ErP Compliant 2015)
ErP [FMEG] Target	N 40
FMEG Blade Angle [Range]	32° [32° - 36°]
Measurement Category	C (Static)
VSD	N
Fan + Motor Efficiency	34.3% (1.58 m³/s @ 206 Pa)
Motor Input Power (ErP)	0.947 kW

SFP value	0.51 W/(l/s) @ Requested Duty
Power from mains	0.94 kW
Energy Consumption	2826 kWh (3000 h/year)
Running Cost / Year	£339

Air Density	1.2 kg/m³ / 20 °C / 0 m / 40% RH
Smoke Venting	Non Smoke Venting
Product Number	EJ511466

Performance data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with ISO 5801 and is specifically applicable for Ducted installations. When an electronic controller is incorporated, enhanced motor noise can occur - particularly when the operating speed is well below maximum. FWL therefore recommend using an auto transformer speed controller for noise sensitive applications. Bifurcateds are Erp exempt when used continuously at >100C. They are not for use in the EEA at lower temperatures.

Acoustic data has been derived from tests carried out in a Flakt Woods laboratory, in accordance with BS 848 Pt 2, 1985 / ISO 5136 under Ducted conditions. The LpA figure provided is the overall Inlet sound pressure level calculated at the specified distance, under spherical, free field conditions. Breakout levels stated are estimated from induct sound power levels and are provided for guidance.

Acoustic figures for adjusted running speeds have been interpolated and are for reference only.

Terms and Conditions: This offer is made subject to the terms and conditions detailed on the accompanying letter.

	Sound Spectrum (Hz)								Overall	
	63	125	250	500	1k	2k	4k	8k	Lw*	LpA @ 3 m**
Inlet*	76	78	76	74	72	69	65	61	83	56
Outlet*	78	79	76	74	73	70	67	62	83	57
Breakout*	78	79	76	74	73	70	67	62	83	57

* Lw dB re 10⁻¹² W



** dBA re 2x10⁻⁵ Pa

Sound data at requested duty.

Description	Qty
Fan	
EJ511466 - 50JM/20/4/6/32	1
Accessories	
Thermostat	1




Quotation Number	:	Project Code	:
Project Name	:	Customer	:
Item Reference:	:	Date:	: Friday, October 20, 2017
		Fan Code	: 50JM/20/4/6/32

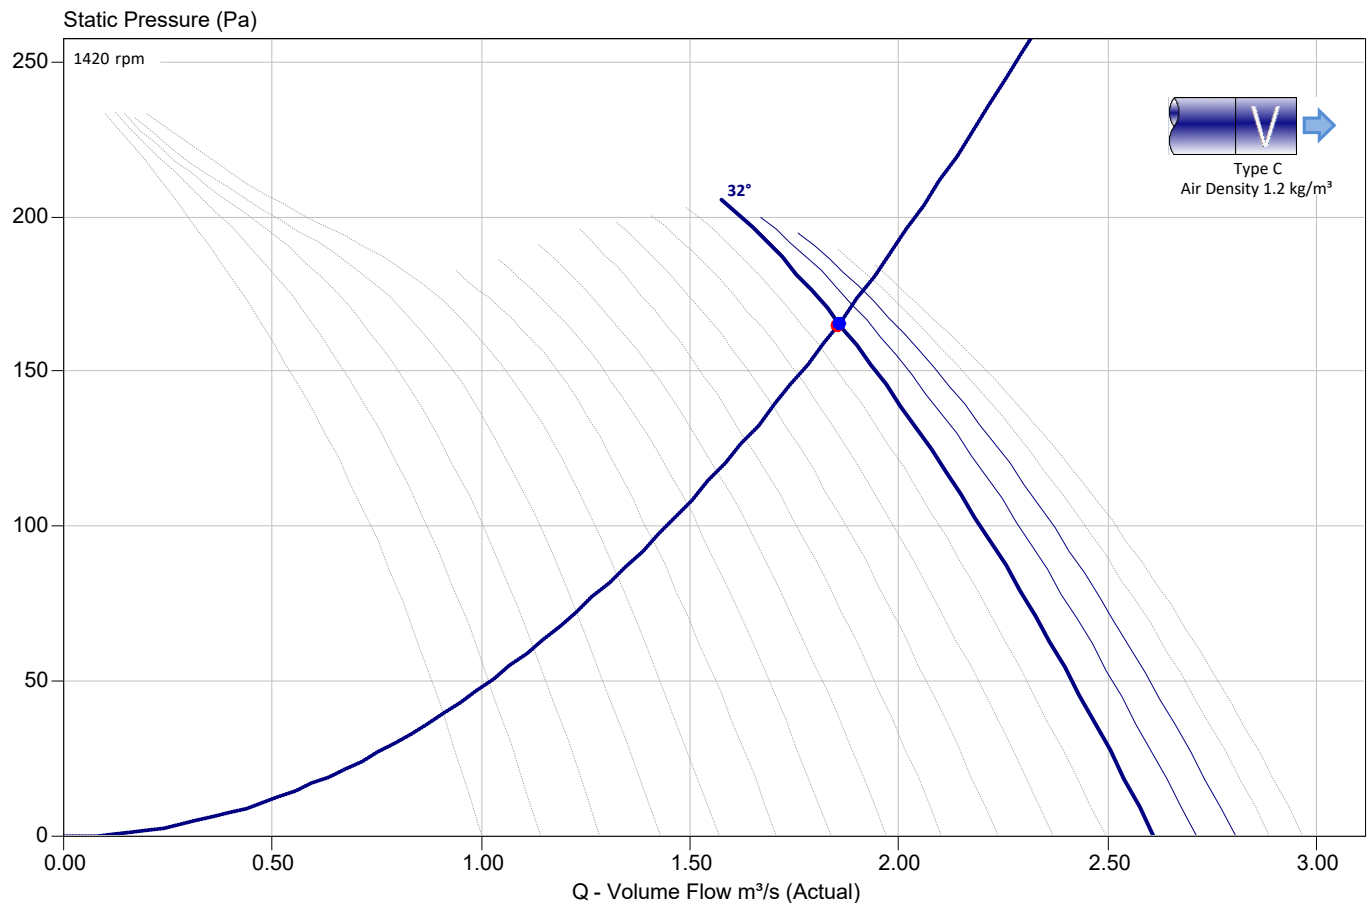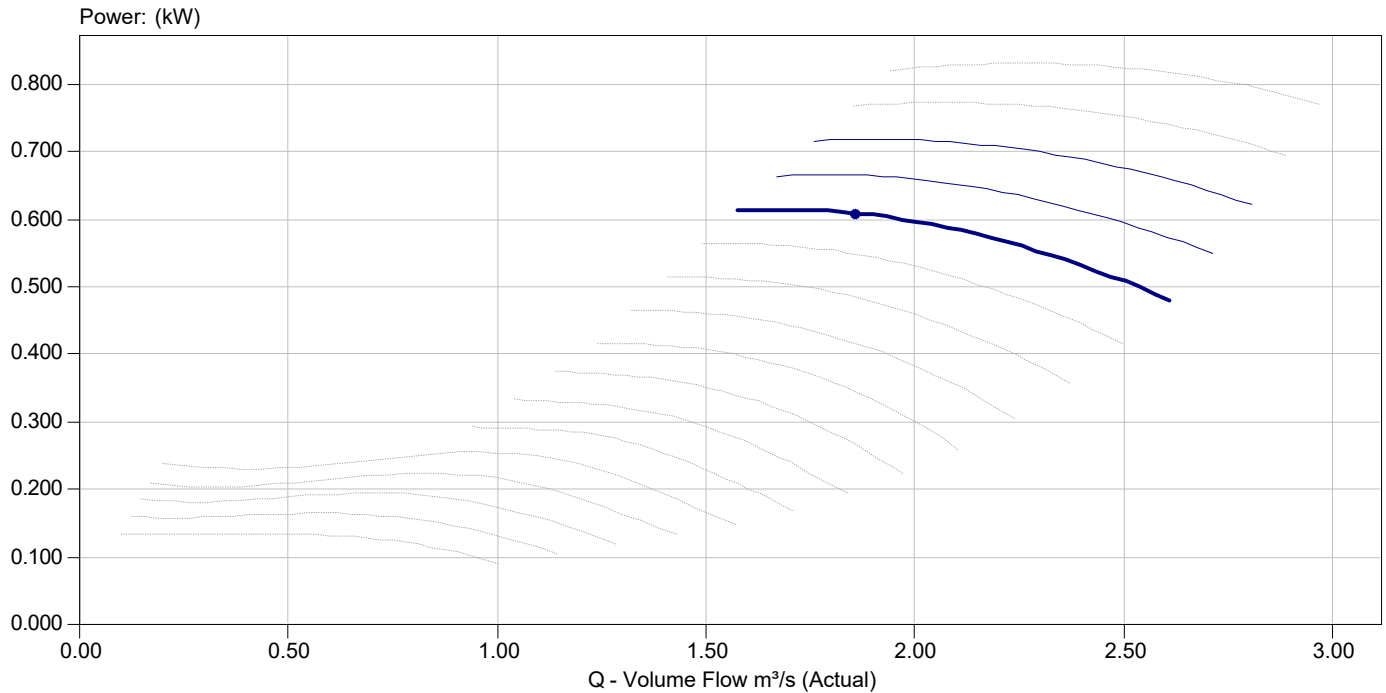



Quotation Number :
Project Name :
Item Reference :

Fan Code : 50JM/20/4/6/32
Customer :
Date : Friday, October 20, 2017

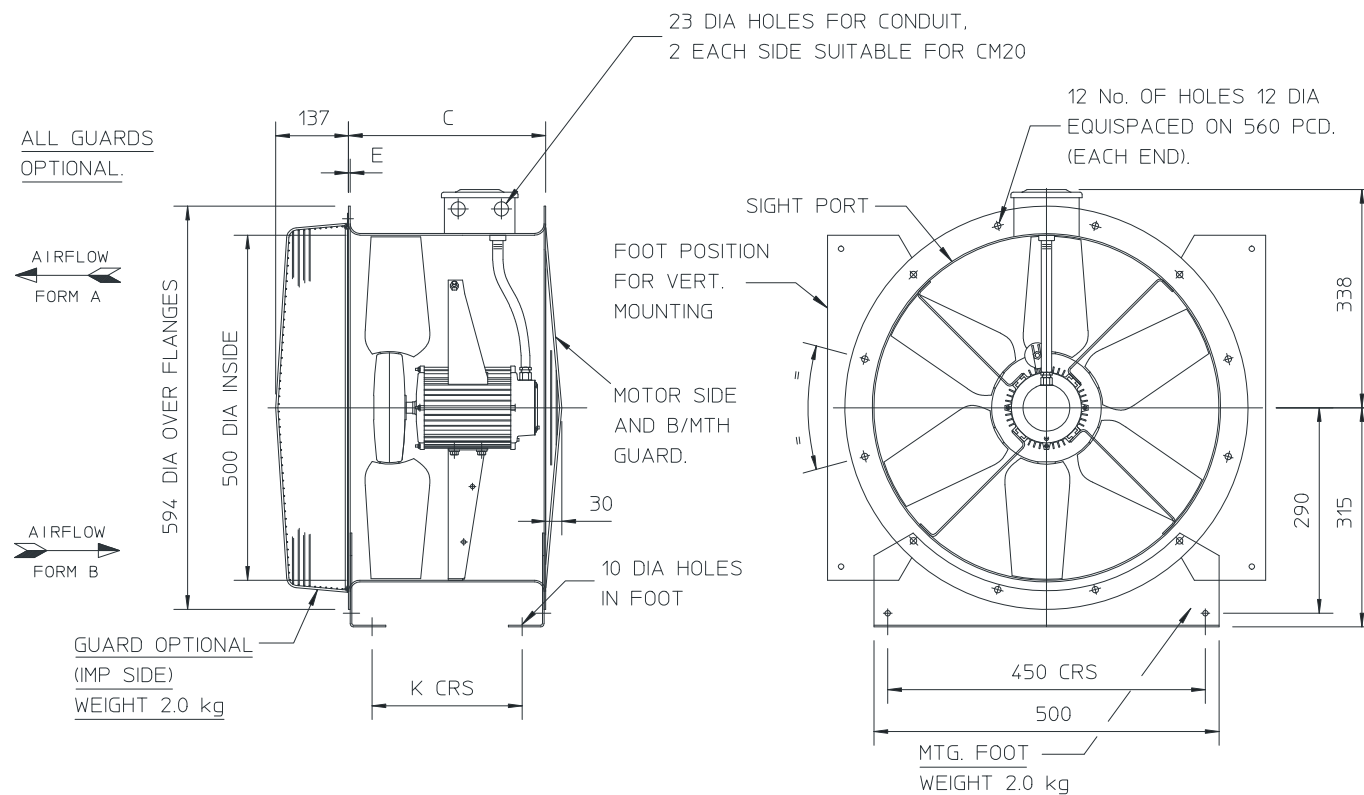

C	330
E	2.5
K	289
Weight (kg)	34

Notes : Dimensions shown in mm / Weight in kg

Reference:D269014

This drawing shows dimensions that should be used as a guide only and are subject to change. Certified drawings are available on request.

Unit E1 Logford Trading Estate
Thomas Street, Stretford, M320JT
Tel: 01618641777 Fax: 01618642777

Website: nfan.co.uk
Email: jon@nfan.co.uk
Copyright Fläkt Woods Group 2003 - 2017