



Modern

A flat, smooth, single-lap interlocking design whose slate-like appearance is enhanced by the required broken bond laying pattern.



Colour availability

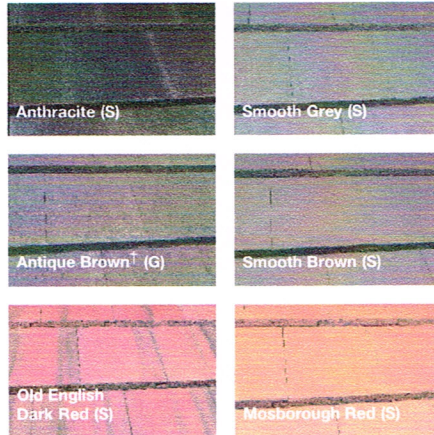

Key


(S) Smooth finish (G) Granular finish

† Only available without nail holes

Modern fittings

Available in all colours to match main tiles.

Modern should be laid broken bond. The required broken bond pattern is created by the introduction of half tiles to form verges in alternate courses. Half tiles are formed on-site by cutting along the scoreline.



Technical data

Size of tile	420mm x 330mm
Minimum pitch*	22.5° Smooth (75mm headlap) 17.5° Smooth (100mm headlap) 30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm
Maximum gauge	345mm
Tile thickness	30mm
Cover width	292mm (nominal)
Hanging length	397mm (nominal)
Covering capacity (net)	9.9 tiles/m ² at 75mm headlap 10.7 tiles/m ² at 100mm headlap
Weight of tiling (approx.)	50kg/m ² (0.49 kN/m ²) at 75mm headlap 54kg/m ² (0.53 kN/m ²) at 100mm headlap
Battens required (net)	2.9 lin./m ² at 75mm headlap 3.1 lin./m ² at 100mm headlap
Batten size recommended	38 x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50 x 25mm for rafters/supports not exceeding 600mm centres
Tile nails	50mm x 3.35mm
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Sustainability

- ✓ A+ rated in the BRE Green Guide**
- ✓ BES 6001 (Responsible Sourcing) certified
- ✓ Independent carbon footprint certification

** Based on generic rating for UK produced concrete interlocking tiles (Element Refs: 812410007, 812410010, 812410046)