


Geology 1:50,000 scale - Bedrock

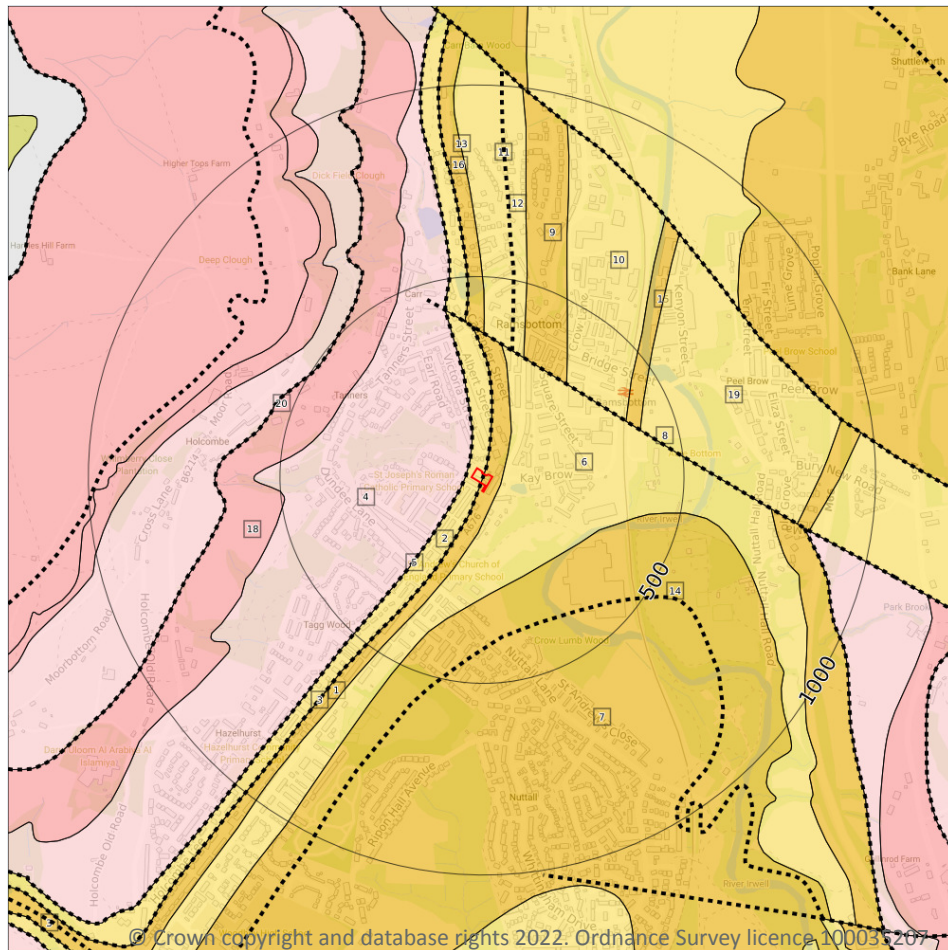

— Site Outline

Search buffers in metres (m)

.... Bedrock faults and other linear features (50k)

Bedrock geology (50k)
Please see table for more details.

15.8 Bedrock geology (50k)

Records within 500m

13

Bedrock geology at 1:50,000 scale. The main mass of rocks forming the Earth and present everywhere, whether exposed at the surface in outcrops or concealed beneath superficial deposits or water.

Features are displayed on the Geology 1:50,000 scale - Bedrock map on **page 103**

ID	Location	LEX Code	Description	Rock age
1	On site	HLBG-SDST	HOLCOMBE BROOK GRIT - SANDSTONE	NAMURIAN
2	On site	MARSD-MDSI	MARSDEN FORMATION - MUDSTONE AND SILTSTONE	NAMURIAN
4	15m W	ROSSE-MDSI	ROSSENDALE FORMATION - MUDSTONE AND SILTSTONE	NAMURIAN

ID	Location	LEX Code	Description	Rock age
6	26m E	MARSD-MDSI	MARSDEN FORMATION - MUDSTONE AND SILTSTONE	NAMURIAN
7	243m SE	BBS-SDST	BROOKSBOTTOMS GRIT - SANDSTONE	NAMURIAN
9	308m NE	BBS-SDST	BROOKSBOTTOMS GRIT - SANDSTONE	NAMURIAN
10	310m NE	MARSD-MDSI	MARSDEN FORMATION - MUDSTONE AND SILTSTONE	NAMURIAN
11	313m NE	MARSD-MDSI	MARSDEN FORMATION - MUDSTONE AND SILTSTONE	NAMURIAN
13	352m N	HLBG-SDST	HOLCOMBE BROOK GRIT - SANDSTONE	NAMURIAN
15	378m NE	GSYG-SDST	GUISELEY GRIT - SANDSTONE	NAMURIAN
17	384m N	MARSD-MDSI	MARSDEN FORMATION - MUDSTONE AND SILTSTONE	NAMURIAN
18	386m NW	LH-SDST	LOWER HASLINGDEN FLAGS - SANDSTONE	NAMURIAN
19	405m E	MARSD-MDSI	MARSDEN FORMATION - MUDSTONE AND SILTSTONE	NAMURIAN

This data is sourced from the British Geological Survey.

15.9 Bedrock permeability (50k)

Records within 50m

4

A qualitative classification of estimated rates of vertical movement of water from the ground surface through the unsaturated zone of bedrock (the zone between the land surface and the water table).

Location	Flow type	Maximum permeability	Minimum permeability
On site	Fracture	High	Moderate
On site	Fracture	Low	Low
15m W	Fracture	Low	Low
26m N	Fracture	Low	Low

This data is sourced from the British Geological Survey.



15.10 Bedrock faults and other linear features (50k)

Records within 500m

7

Linear features at the ground or bedrock surface at 1:50,000 scale of six main types; rock, fault, fold axis, mineral vein, alteration area or landform. Features are either observed or inferred, and relate primarily to bedrock.


Features are displayed on the Geology 1:50,000 scale - Bedrock map on **page 103**

ID	Location	Category	Description
3	On site	ROCK	Coal seam, inferred
5	15m W	FOSSIL_HORIZON	Marine band
8	308m NE	FAULT	Fault, inferred
12	320m N	ROCK	Coal seam, inferred
14	371m S	ROCK	Coal seam, inferred
16	384m N	ROCK	Coal seam, inferred
20	490m NW	FOSSIL_HORIZON	Marine band

This data is sourced from the British Geological Survey.



16 Boreholes

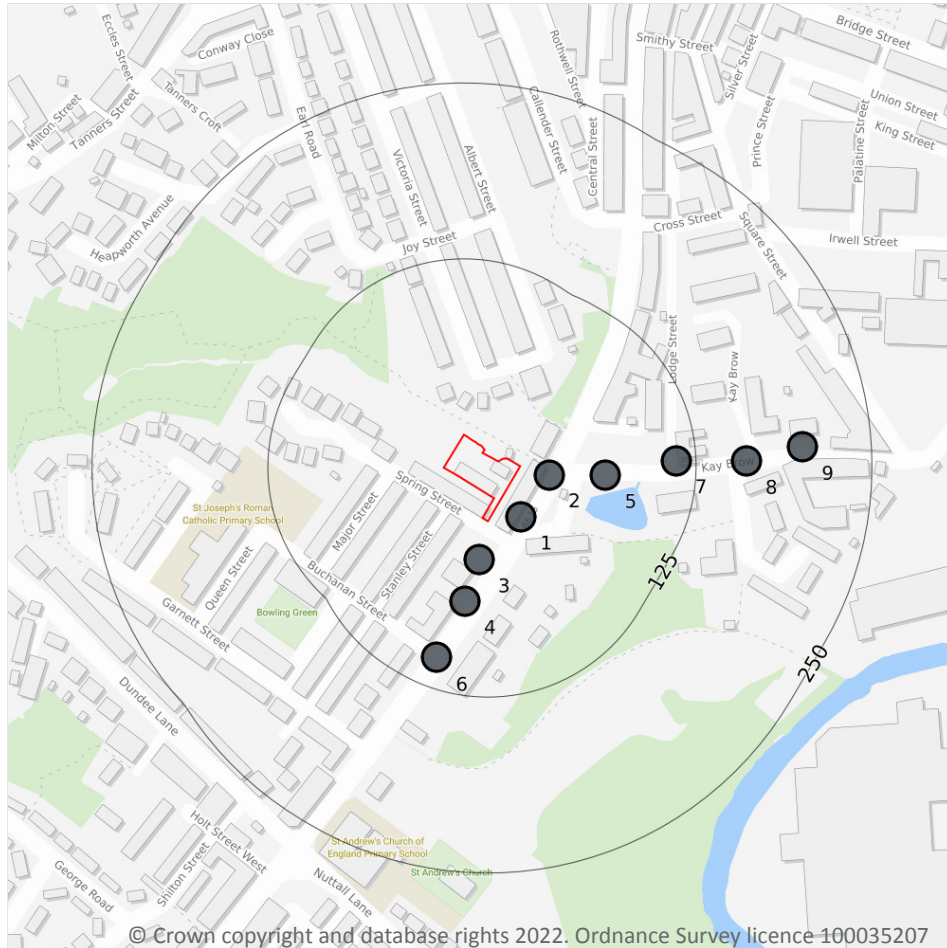

16.1 BGS Boreholes

Records within 250m

9

The Single Onshore Boreholes Index (SOBI); an index of over one million records of boreholes, shafts and wells from all forms of drilling and site investigation work held by the British Geological Survey. Covering onshore and nearshore boreholes dating back to at least 1790 and ranging from one to several thousand metres deep.

Features are displayed on the Boreholes map on **page 106**

ID	Location	Grid reference	Name	Length	Confidential	Web link
1	19m SE	378950 416550	BOLTON ST/KAY BROW RAMSBOT BH7	-	Y	N/A
2	22m E	378970 416580	BOLTON ST/KAY BROW RAMSBOT BH6	-	Y	N/A
3	28m S	378920 416520	BOLTON ST/KAY BROW RAMSBOT BH8	-	Y	N/A





ID	Location	Grid reference	Name	Length	Confidential	Web link
4	59m S	378910 416490	BOLTON ST/KAY BROW RAMSBOT BH9	-	Y	N/A
5	61m E	379010 416580	BOLTON ST/KAY BROW RAMSBOT BH5	-	Y	N/A
6	104m S	378890 416450	BOLTON ST/KAY BROW RAMSBOTBH10	-	Y	N/A
7	111m E	379060 416590	BOLTON ST/KAY BROW RAMSBOT BH4	-	Y	N/A
8	161m E	379110 416590	BOLTON ST/KAY BROW RAMSBOT BH3	-	Y	N/A
9	201m E	379150 416600	BOLTON ST/KAY BROW RAMSBOT BH2	-	Y	N/A

This data is sourced from the British Geological Survey.



17 Natural ground subsidence - Shrink swell clays

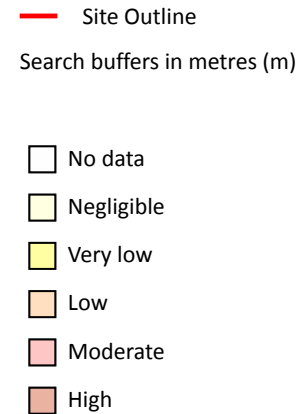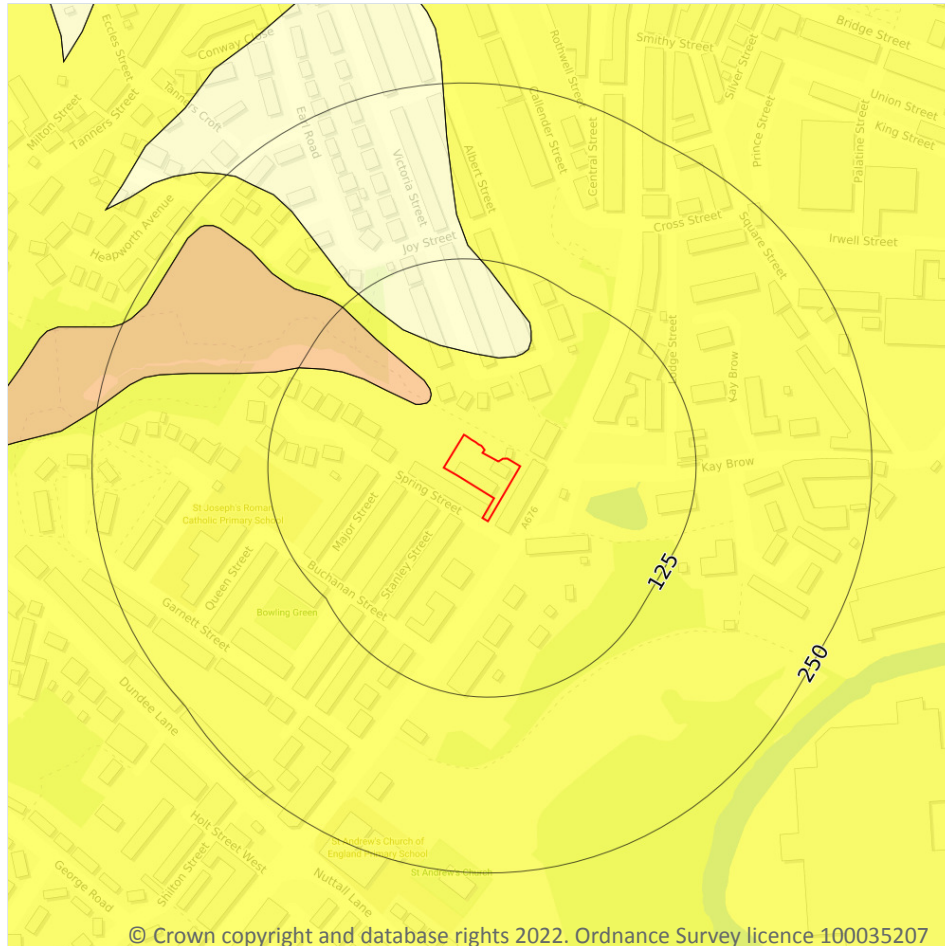

17.1 Shrink swell clays

Records within 50m

2

The potential hazard presented by soils that absorb water when wet (making them swell), and lose water as they dry (making them shrink). This shrink-swell behaviour is controlled by the type and amount of clay in the soil, and by seasonal changes in the soil moisture content (related to rainfall and local drainage).



Features are displayed on the Natural ground subsidence - Shrink swell clays map on **page 108**

Location	Hazard rating	Details
On site	Very low	Ground conditions predominantly low plasticity.
35m NW	Low	Ground conditions predominantly medium plasticity.

This data is sourced from the British Geological Survey.



Natural ground subsidence - Running sands

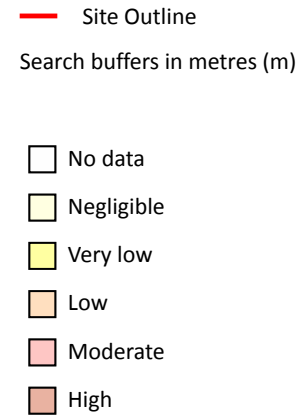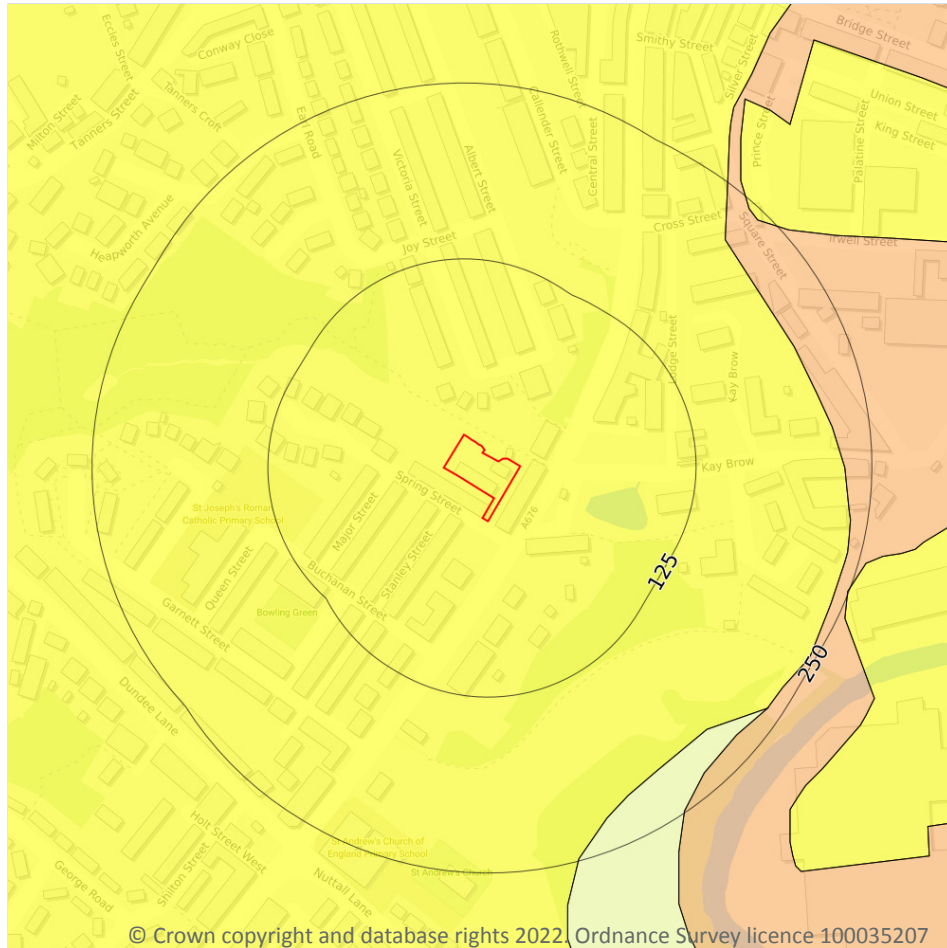

17.2 Running sands

Records within 50m

1

The potential hazard presented by rocks that can contain loosely-packed sandy layers that can become fluidised by water flowing through them. Such sands can 'run', removing support from overlying buildings and causing potential damage.



Features are displayed on the Natural ground subsidence - Running sands map on **page 109**

Location	Hazard rating	Details
On site	Very low	Running sand conditions are unlikely. No identified constraints on land use due to running conditions unless water table rises rapidly.

This data is sourced from the British Geological Survey.



Natural ground subsidence - Compressible deposits

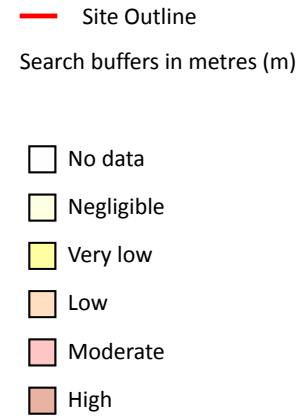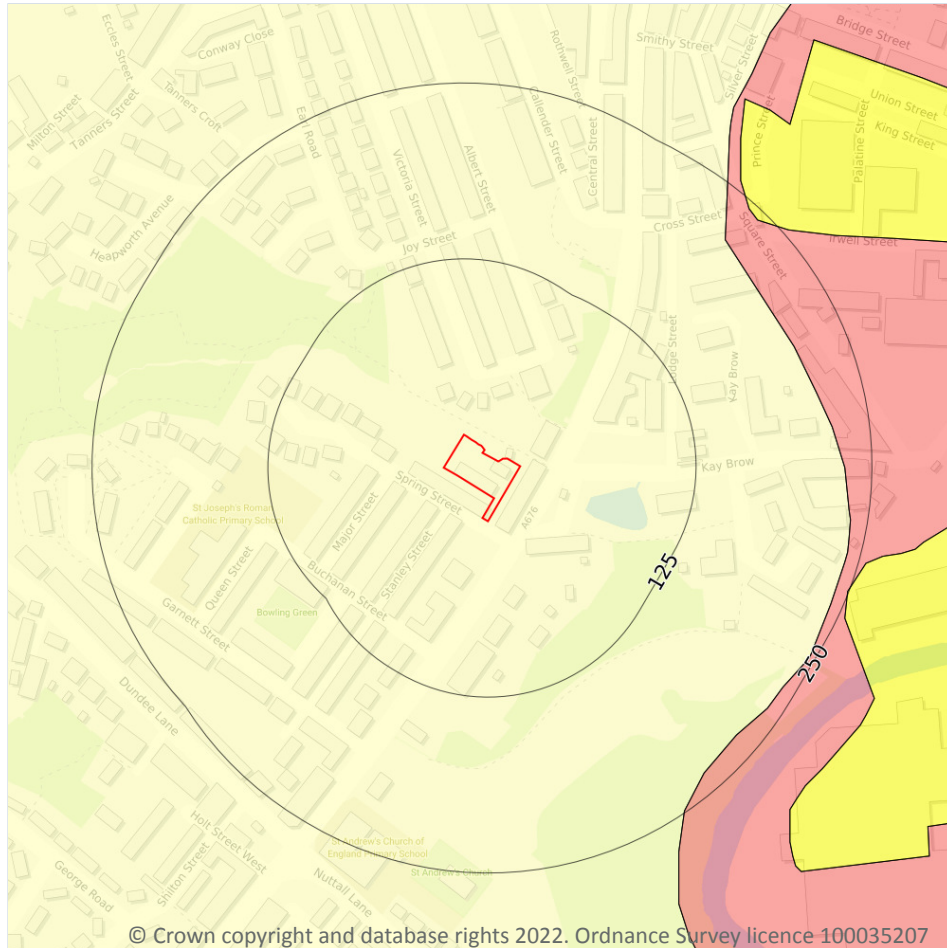

© Crown copyright and database rights 2022. Ordnance Survey licence 100035207

17.3 Compressible deposits

Records within 50m

1

The potential hazard presented by types of ground that may contain layers of very soft materials like clay or peat and may compress if loaded by overlying structures, or if the groundwater level changes, potentially resulting in depression of the ground and disturbance of foundations.



Features are displayed on the Natural ground subsidence - Compressible deposits map on **page 110**

Location	Hazard rating	Details
On site	Negligible	Compressible strata are not thought to occur.

This data is sourced from the British Geological Survey.



Natural ground subsidence - Collapsible deposits

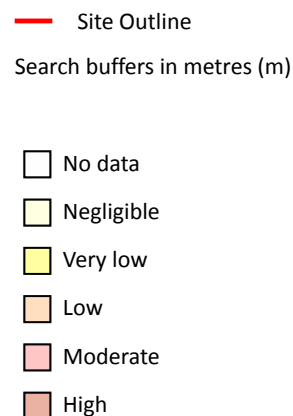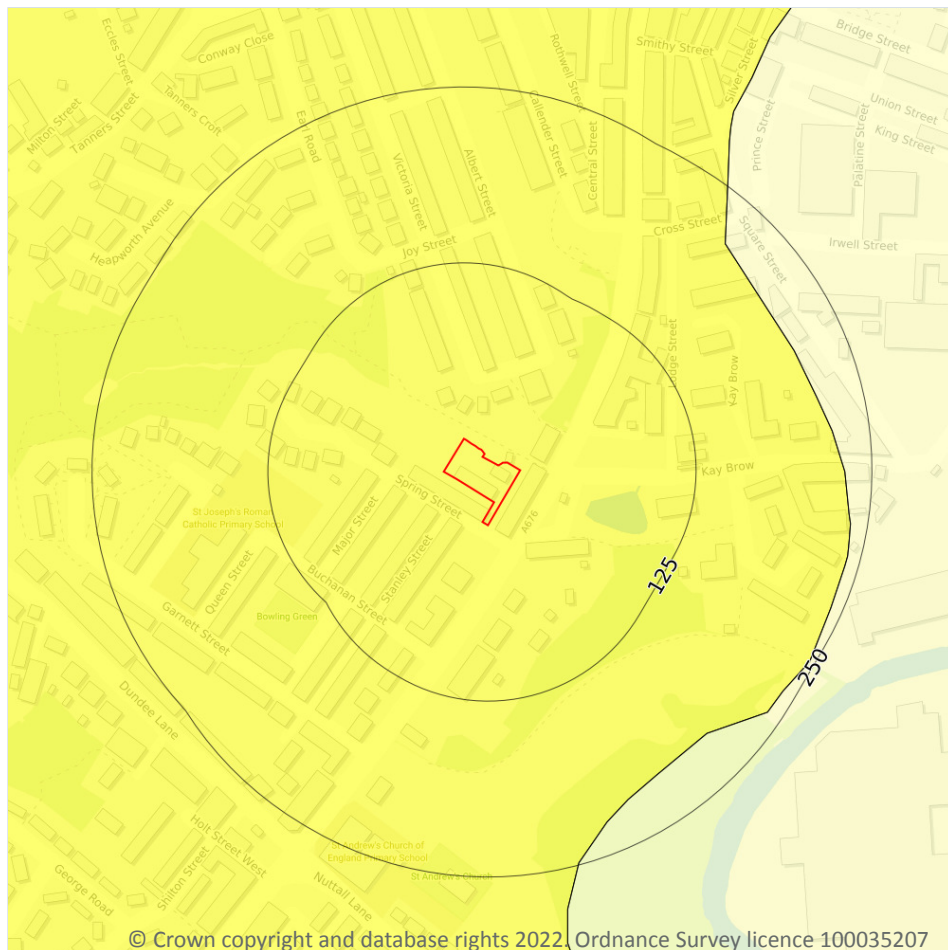

17.4 Collapsible deposits

Records within 50m

1



The potential hazard presented by natural deposits that could collapse when a load (such as a building) is placed on them or they become saturated with water.

Features are displayed on the Natural ground subsidence - Collapsible deposits map on **page 111**

Location	Hazard rating	Details
On site	Very low	Deposits with potential to collapse when loaded and saturated are unlikely to be present.

This data is sourced from the British Geological Survey.

Natural ground subsidence - Landslides

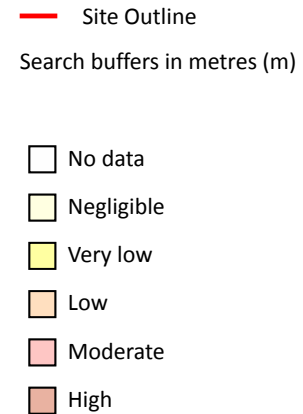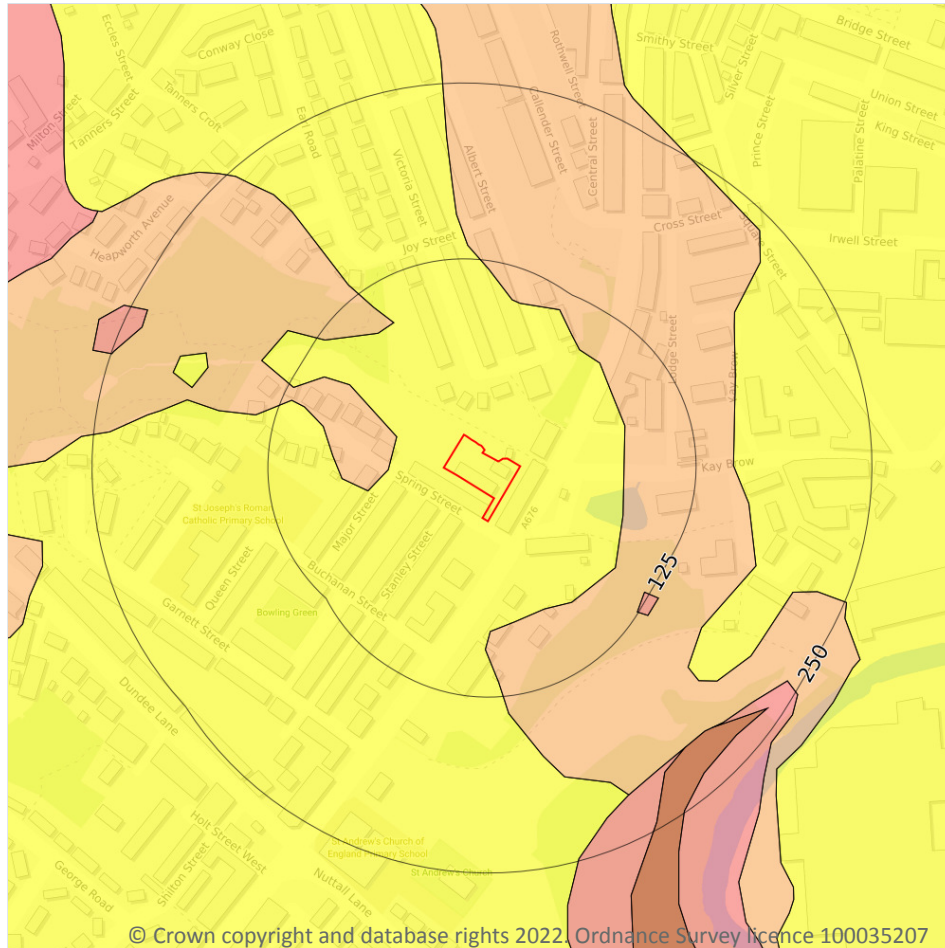

17.5 Landslides

Records within 50m

2

The potential for landsliding (slope instability) to be a hazard assessed using 1:50,000 scale digital maps of superficial and bedrock deposits, combined with information from the BGS National Landslide Database and scientific and engineering reports.

Features are displayed on the Natural ground subsidence - Landslides map on **page 112**

Location	Hazard rating	Details
On site	Very low	Slope instability problems are not likely to occur but consideration to potential problems of adjacent areas impacting on the site should always be considered.




Location	Hazard rating	Details
38m W	Low	Slope instability problems may be present or anticipated. Site investigation should consider specifically the slope stability of the site.

This data is sourced from the British Geological Survey.



Natural ground subsidence - Ground dissolution of soluble rocks

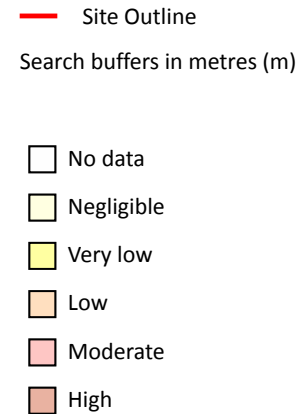

17.6 Ground dissolution of soluble rocks

Records within 50m

1

The potential hazard presented by ground dissolution, which occurs when water passing through soluble rocks produces underground cavities and cave systems. These cavities reduce support to the ground above and can cause localised collapse of the overlying rocks and deposits.


Features are displayed on the Natural ground subsidence - Ground dissolution of soluble rocks map on **page 114**

Location	Hazard rating	Details
On site	Negligible	Soluble rocks are either not thought to be present within the ground, or not prone to dissolution. Dissolution features are unlikely to be present.

This data is sourced from the British Geological Survey.



18 Mining, ground workings and natural cavities

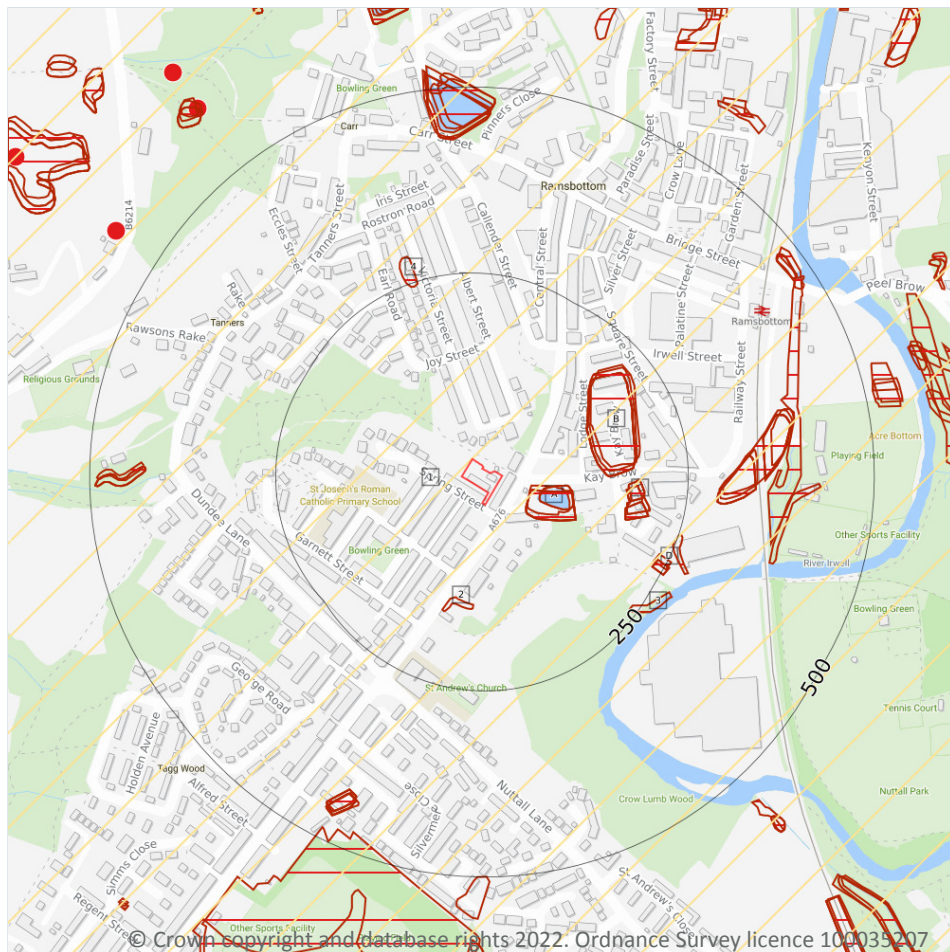

- Site Outline
- Search buffers in metres (m)
- Natural cavities (Area)
- Natural cavities (Point)
- BritPits
- Surface ground workings
- Underground workings
- Historical Mineral Planning Areas
- Mining Cavities
- Non Coal Mining
- Sporadic underground mining of restricted extent possible
- Localised small scale underground mining possible
- Small scale mining possible
- Underground mining known or likely within or in close proximity
- Underground mining known within or in very close proximity

18.1 Natural cavities

Records within 500m

0

Industry recognised national database of natural cavities. Sinkholes and caves are formed by the dissolution of soluble rock, such as chalk and limestone, gulls and fissures by cambering. Ground instability can result from movement of loose material contained within these cavities, often triggered by water.

This data is sourced from Stantec UK Ltd.

18.2 BritPits

Records within 500m

0

BritPits (an abbreviation of British Pits) is a database maintained by the British Geological Survey of currently active and closed surface and underground mineral workings. Details of major mineral handling sites, such as wharfs and rail depots are also held in the database.

This data is sourced from the British Geological Survey.

18.3 Surface ground workings

Records within 250m

27

Historical land uses identified from Ordnance Survey mapping that involved ground excavation at the surface. These features may or may not have been subsequently backfilled.

Features are displayed on the Mining, ground workings and natural cavities map on **page 116**

ID	Location	Land Use	Year of mapping	Mapping scale
A	42m E	Reservoir	1955	1:10560
A	43m SE	Reservoir	1948	1:10560
A	43m SE	Reservoir	1927	1:10560
A	43m SE	Reservoir	1908	1:10560
A	43m SE	Pond	1891	1:10560
A	57m SE	Pond	1980	1:10000
A	57m SE	Pond	1968	1:10560
B	126m E	Reservoir	1948	1:10560
B	126m E	Reservoir	1927	1:10560
B	126m E	Reservoir	1908	1:10560
B	126m E	Reservoir	1891	1:10560
B	130m E	Reservoir	1955	1:10560
2	130m S	Unspecified Ground Workings	1955	1:10560
B	136m E	Pond	1968	1:10560
C	169m E	Reservoirs	1948	1:10560
C	169m E	Reservoirs	1927	1:10560
C	169m E	Reservoirs	1908	1:10560



ID	Location	Land Use	Year of mapping	Mapping scale
C	171m E	Ponds	1968	1:10560
C	171m E	Reservoirs	1955	1:10560
C	172m E	Reservoirs	1948	1:10560
C	172m E	Reservoirs	1908	1:10560
D	234m SE	Filter Beds	1955	1:10560
D	236m SE	Filter Beds	1948	1:10560
D	236m SE	Filter Beds	1927	1:10560
3	240m SE	Unspecified Ground Workings	1908	1:10560
4	244m N	Refuse Heap	1891	1:10560
D	248m E	Unspecified Ground Workings	1908	1:10560

This data is sourced from Ordnance Survey/Groundsure.

18.4 Underground workings

Records within 1000m

7

Historical land uses identified from Ordnance Survey mapping that indicate the presence of underground workings e.g. mine shafts.

Features are displayed on the Mining, ground workings and natural cavities map on **page 116**

ID	Location	Land Use	Year of mapping	Mapping scale
-	906m SE	Tunnel	1980	1:10000
-	906m SE	Tunnel	1968	1:10560
-	906m SE	Tunnel	1949	1:10560
-	909m SE	Tunnel	1848	1:10560
-	909m SE	Tunnel	1927	1:10560
-	909m SE	Tunnel	1908	1:10560
-	909m SE	Tunnel	1891	1:10560

This data is sourced from Ordnance Survey/Groundsure.



18.5 Historical Mineral Planning Areas

Records within 500m

0

Boundaries of mineral planning permissions for England and Wales. This data was collated between the 1940s (and retrospectively to the 1930s) and the mid 1980s. The data includes permitted, withdrawn and refused permissions.

This data is sourced from the British Geological Survey.

18.6 Non-coal mining

Records within 1000m

1

The potential for historical non-coal mining to have affected an area. The assessment is drawn from expert knowledge and literature in addition to the digital geological map of Britain. Mineral commodities may be divided into seven general categories - vein minerals, chalk, oil shale, building stone, bedded ores, evaporites and 'other' commodities (including ball clay, jet, black marble, graphite and chert).

Features are displayed on the Mining, ground workings and natural cavities map on **page 116**

ID	Location	Name	Commodity	Class	Likelihood
1	On site	Not available	Vein Mineral	A	Sporadic underground mining of restricted extent may have occurred. Potential for difficult ground conditions are unlikely and localised and are at a level where they need not be considered

This data is sourced from the British Geological Survey.

18.7 Mining cavities

Records within 1000m

0

Industry recognised national database of mining cavities. Degraded mines may result in hazardous subsidence (crown holes). Climatic conditions and water escape can also trigger subsidence over mine entrances and workings.

This data is sourced from Stantec UK Ltd.

18.8 JPB mining areas

Records on site

0

Areas which could be affected by former coal and other mining. This data includes some mine plans unavailable to the Coal Authority.

This data is sourced from Johnson Poole and Bloomer.



18.9 Coal mining

Records on site	1
-----------------	---

Areas which could be affected by past, current or future coal mining.

Location	Details
On site	The site is located within a coal mining area as defined by the Coal Authority. A Consultants Coal Mining Report is recommended to further assess coal mining issues at the site. This can be ordered directly through Groundsure or your preferred search provider.

This data is sourced from the Coal Authority.

18.10 Brine areas

Records on site	0
-----------------	---

The Cheshire Brine Compensation District indicates areas that may be affected by salt and brine extraction in Cheshire and where compensation would be available where damage from this mining has occurred. Damage from salt and brine mining can still occur outside this district, but no compensation will be available.

This data is sourced from the Cheshire Brine Subsidence Compensation Board.

18.11 Gypsum areas

Records on site	0
-----------------	---

Generalised areas that may be affected by gypsum extraction.

This data is sourced from British Gypsum.

18.12 Tin mining

Records on site	0
-----------------	---

Generalised areas that may be affected by historical tin mining.

This data is sourced from Groundsure.

18.13 Clay mining

Records on site	0
-----------------	---

Generalised areas that may be affected by kaolin and ball clay extraction.

This data is sourced from the Kaolin and Ball Clay Association (UK).



19 Radon



© Crown copyright and database rights 2022. Ordnance Survey licence 100035207

— Site Outline
Search buffers in metres (m)

- Greater than 30%
- Between 10% and 30%
- Between 5% and 10%
- Between 3% and 5%
- Between 1% and 3%
- Less than 1%

19.1 Radon

Records on site

1

Estimated percentage of dwellings exceeding the Radon Action Level. This data is the highest resolution radon dataset available for the UK and is produced to a 75m level of accuracy to allow for geological data accuracy and a 'residential property' buffer. The findings of this section should supersede any estimations derived from the Indicative Atlas of Radon in Great Britain. The data was derived from both geological assessments and long term measurements of radon in more than 479,000 households.

Features are displayed on the Radon map on **page 121**

Location	Estimated properties affected	Radon Protection Measures required
On site	Less than 1%	None**

This data is sourced from the British Geological Survey and Public Health England.



20 Soil chemistry

20.1 BGS Estimated Background Soil Chemistry

Records within 50m

3

The estimated values provide the likely background concentration of the potentially harmful elements Arsenic, Cadmium, Chromium, Lead and Nickel in topsoil. The values are estimated primarily from rural topsoil data collected at a sample density of approximately 1 per 2 km². In areas where rural soil samples are not available, estimation is based on stream sediment data collected from small streams at a sampling density of 1 per 2.5 km²; this is the case for most of Scotland, Wales and southern England. The stream sediment data are converted to soil-equivalent concentrations prior to the estimation.

Location	Arsenic	Bioaccessible Arsenic	Lead	Bioaccessible Lead	Cadmium	Chromium	Nickel
On site	15 mg/kg	No data	100 mg/kg	60 mg/kg	1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg
37m NW	15 mg/kg	No data	100 mg/kg	60 mg/kg	1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg
47m SW	15 mg/kg	No data	100 mg/kg	60 mg/kg	1.8 mg/kg	60 - 90 mg/kg	15 - 30 mg/kg

This data is sourced from the British Geological Survey.

20.2 BGS Estimated Urban Soil Chemistry

Records within 50m

0

Estimated topsoil chemistry of Arsenic, Cadmium, Chromium, Copper, Nickel, Lead, Tin and Zinc and bioaccessible Arsenic and Lead in 23 urban centres across Great Britain. These estimates are derived from interpolation of the measured urban topsoil data referred to above and provide information across each city between the measured sample locations (4 per km²).

This data is sourced from the British Geological Survey.

20.3 BGS Measured Urban Soil Chemistry

Records within 50m

0

The locations and measured total concentrations (mg/kg) of Arsenic, Cadmium, Chromium, Copper, Nickel, Lead, Tin and Zinc in urban topsoil samples from 23 urban centres across Great Britain. These are collected at a sample density of 4 per km².

This data is sourced from the British Geological Survey.



21 Railway infrastructure and projects



- Site Outline
- Search buffers in metres (m)
- C1 Crossrail 1 Stations
- Crossrail 1 Route
- Crossrail 1 Worksites
- C2 Crossrail 2 Stations
- Crossrail 2 Route
- Crossrail 2 Worksites
- Crossrail 2 Safeguarding
- Crossrail 2 Headhouses
- Railway stations
- ... Active railways
- ... Active tunnels
- ... Abandoned railways
- Historic railways
- Historic tunnels
- Underground stations
- Underground Lines
- Royal Mail tunnels
- HS2 optimised route
- HS2 Stations
- HS2 Depots
- HS2 Surface Safeguarding
- HS2 Subsurface Safeguarding

© Crown copyright and database rights 2022. Ordnance Survey licence 100035207

21.1 Underground railways (London)

Records within 250m

0

Details of all active London Underground lines, including approximate tunnel roof depth and operational hours.

This data is sourced from publicly available information by Groundsure.

21.2 Underground railways (Non-London)

Records within 250m

0

Details of the Merseyrail system, the Tyne and Wear Metro and the Glasgow Subway. Not all parts of all systems are located underground. The data contains location information only and does not include a depth assessment.



This data is sourced from publicly available information by Groundsure.

21.3 Railway tunnels

Records within 250m

0

Railway tunnels taken from contemporary Ordnance Survey mapping.

This data is sourced from the Ordnance Survey.

21.4 Historical railway and tunnel features

Records within 250m

4

Railways and tunnels digitised from historical Ordnance Survey mapping as scales of 1:1,250, 1:2,500, 1:10,000 and 1:10,560.

Features are displayed on the Railway infrastructure and projects map on **page 123**

Location	Land Use	Year of mapping	Mapping scale
244m E	Railway Sidings	1955	10560
246m E	Railway Sidings	1948	10560
246m E	Railway Sidings	1927	10560
246m E	Railway Sidings	1962	2500

This data is sourced from Ordnance Survey/Groundsure.

21.5 Royal Mail tunnels

Records within 250m

0

The Post Office Railway, otherwise known as the Mail Rail, is an underground railway running through Central London from Paddington Head District Sorting Office to Whitechapel Eastern Head Sorting Office. The line is 10.5km long. The data includes details of the full extent of the tunnels, the depth of the tunnel, and the depth to track level.

This data is sourced from Groundsure/the Postal Museum.



21.6 Historical railways

Records within 250m**0**

Former railway lines, including dismantled lines, abandoned lines, disused lines, historic railways and razed lines.

This data is sourced from OpenStreetMap.

21.7 Railways

Records within 250m**0**

Currently existing railway lines, including standard railways, narrow gauge, funicular, trams and light railways.

This data is sourced from Ordnance Survey and OpenStreetMap.

21.8 Crossrail 1

Records within 500m**0**

The Crossrail railway project links 41 stations over 100 kilometres from Reading and Heathrow in the west, through underground sections in central London, to Shenfield and Abbey Wood in the east.

This data is sourced from publicly available information by Groundsure.

21.9 Crossrail 2

Records within 500m**0**

Crossrail 2 is a proposed railway linking the national rail networks in Surrey and Hertfordshire via an underground tunnel through London.

This data is sourced from publicly available information by Groundsure.

21.10 HS2

Records within 500m**0**

HS2 is a proposed high speed rail network running from London to Manchester and Leeds via Birmingham. Main civils construction on Phase 1 (London to Birmingham) of the project began in 2019, and it is currently anticipated that this phase will be fully operational by 2026. Construction on Phase 2a (Birmingham to Crewe) is anticipated to commence in 2021, with the service fully operational by 2027. Construction on Phase 2b (Crewe to Manchester and Birmingham to Leeds) is scheduled to begin in 2023 and be operational by 2033.

This data is sourced from HS2 Ltd.



Data providers

Groundsure works with respected data providers to bring you the most relevant and accurate information. To find out who they are and their areas of expertise see <https://www.groundsure.com/sources-reference>.

Terms and conditions

Groundsure's Terms and Conditions can be accessed at this link: <https://www.groundsure.com/terms-and-conditions-jan-2020/>.

