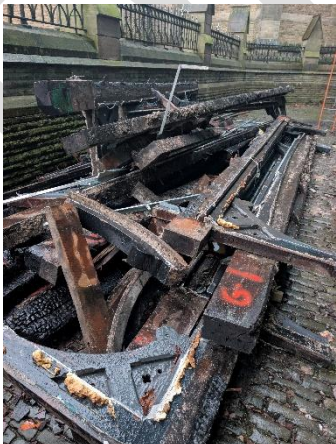


1 The Rock, Bury
Strategy For Re-Use of Salvaged Structural Elements

Element	Recommendations
<u>Roof Tiles</u> 	Mechanically undamaged tiles are suitable for re-use from a structural point of view. Tiles which have been subjected to elevated temperatures and have a pinkish/reddish colour will need further close up inspection and may ultimately not be suitable for re-use. Thorough cleaning of the tiles may be required to facilitate this. <i>This advice will be subject to comments from the Architect/Heritage Consultant on aesthetic matters.</i>
<u>Masonry</u> 	In general, mechanically undamaged masonry is generally suitable for re-use from a structural point of view, subject to compressive strength testing. Masonry which has been subjected to elevated temperatures and has a pinkish/reddish colour will need further close up inspection and may ultimately not be suitable for re-use. Thorough cleaning of the masonry may be required to facilitate this. <i>This advice will be subject to comments from the Architect/Heritage Consultant on aesthetic matters.</i>
<u>Timber</u> 	Any timbers which are charred will not be suitable for re-use in their original location. These elements could theoretically be planed back to sound timber and re-used as structural elements (subject to assessment by M&G) or cladding elsewhere in the building. Any un-charred timber elements should be inspected by a suitably qualified timber rot and infestation specialist before being considered for re-installation in their original location. All timber to be dry stored as soon as reasonably practical.