


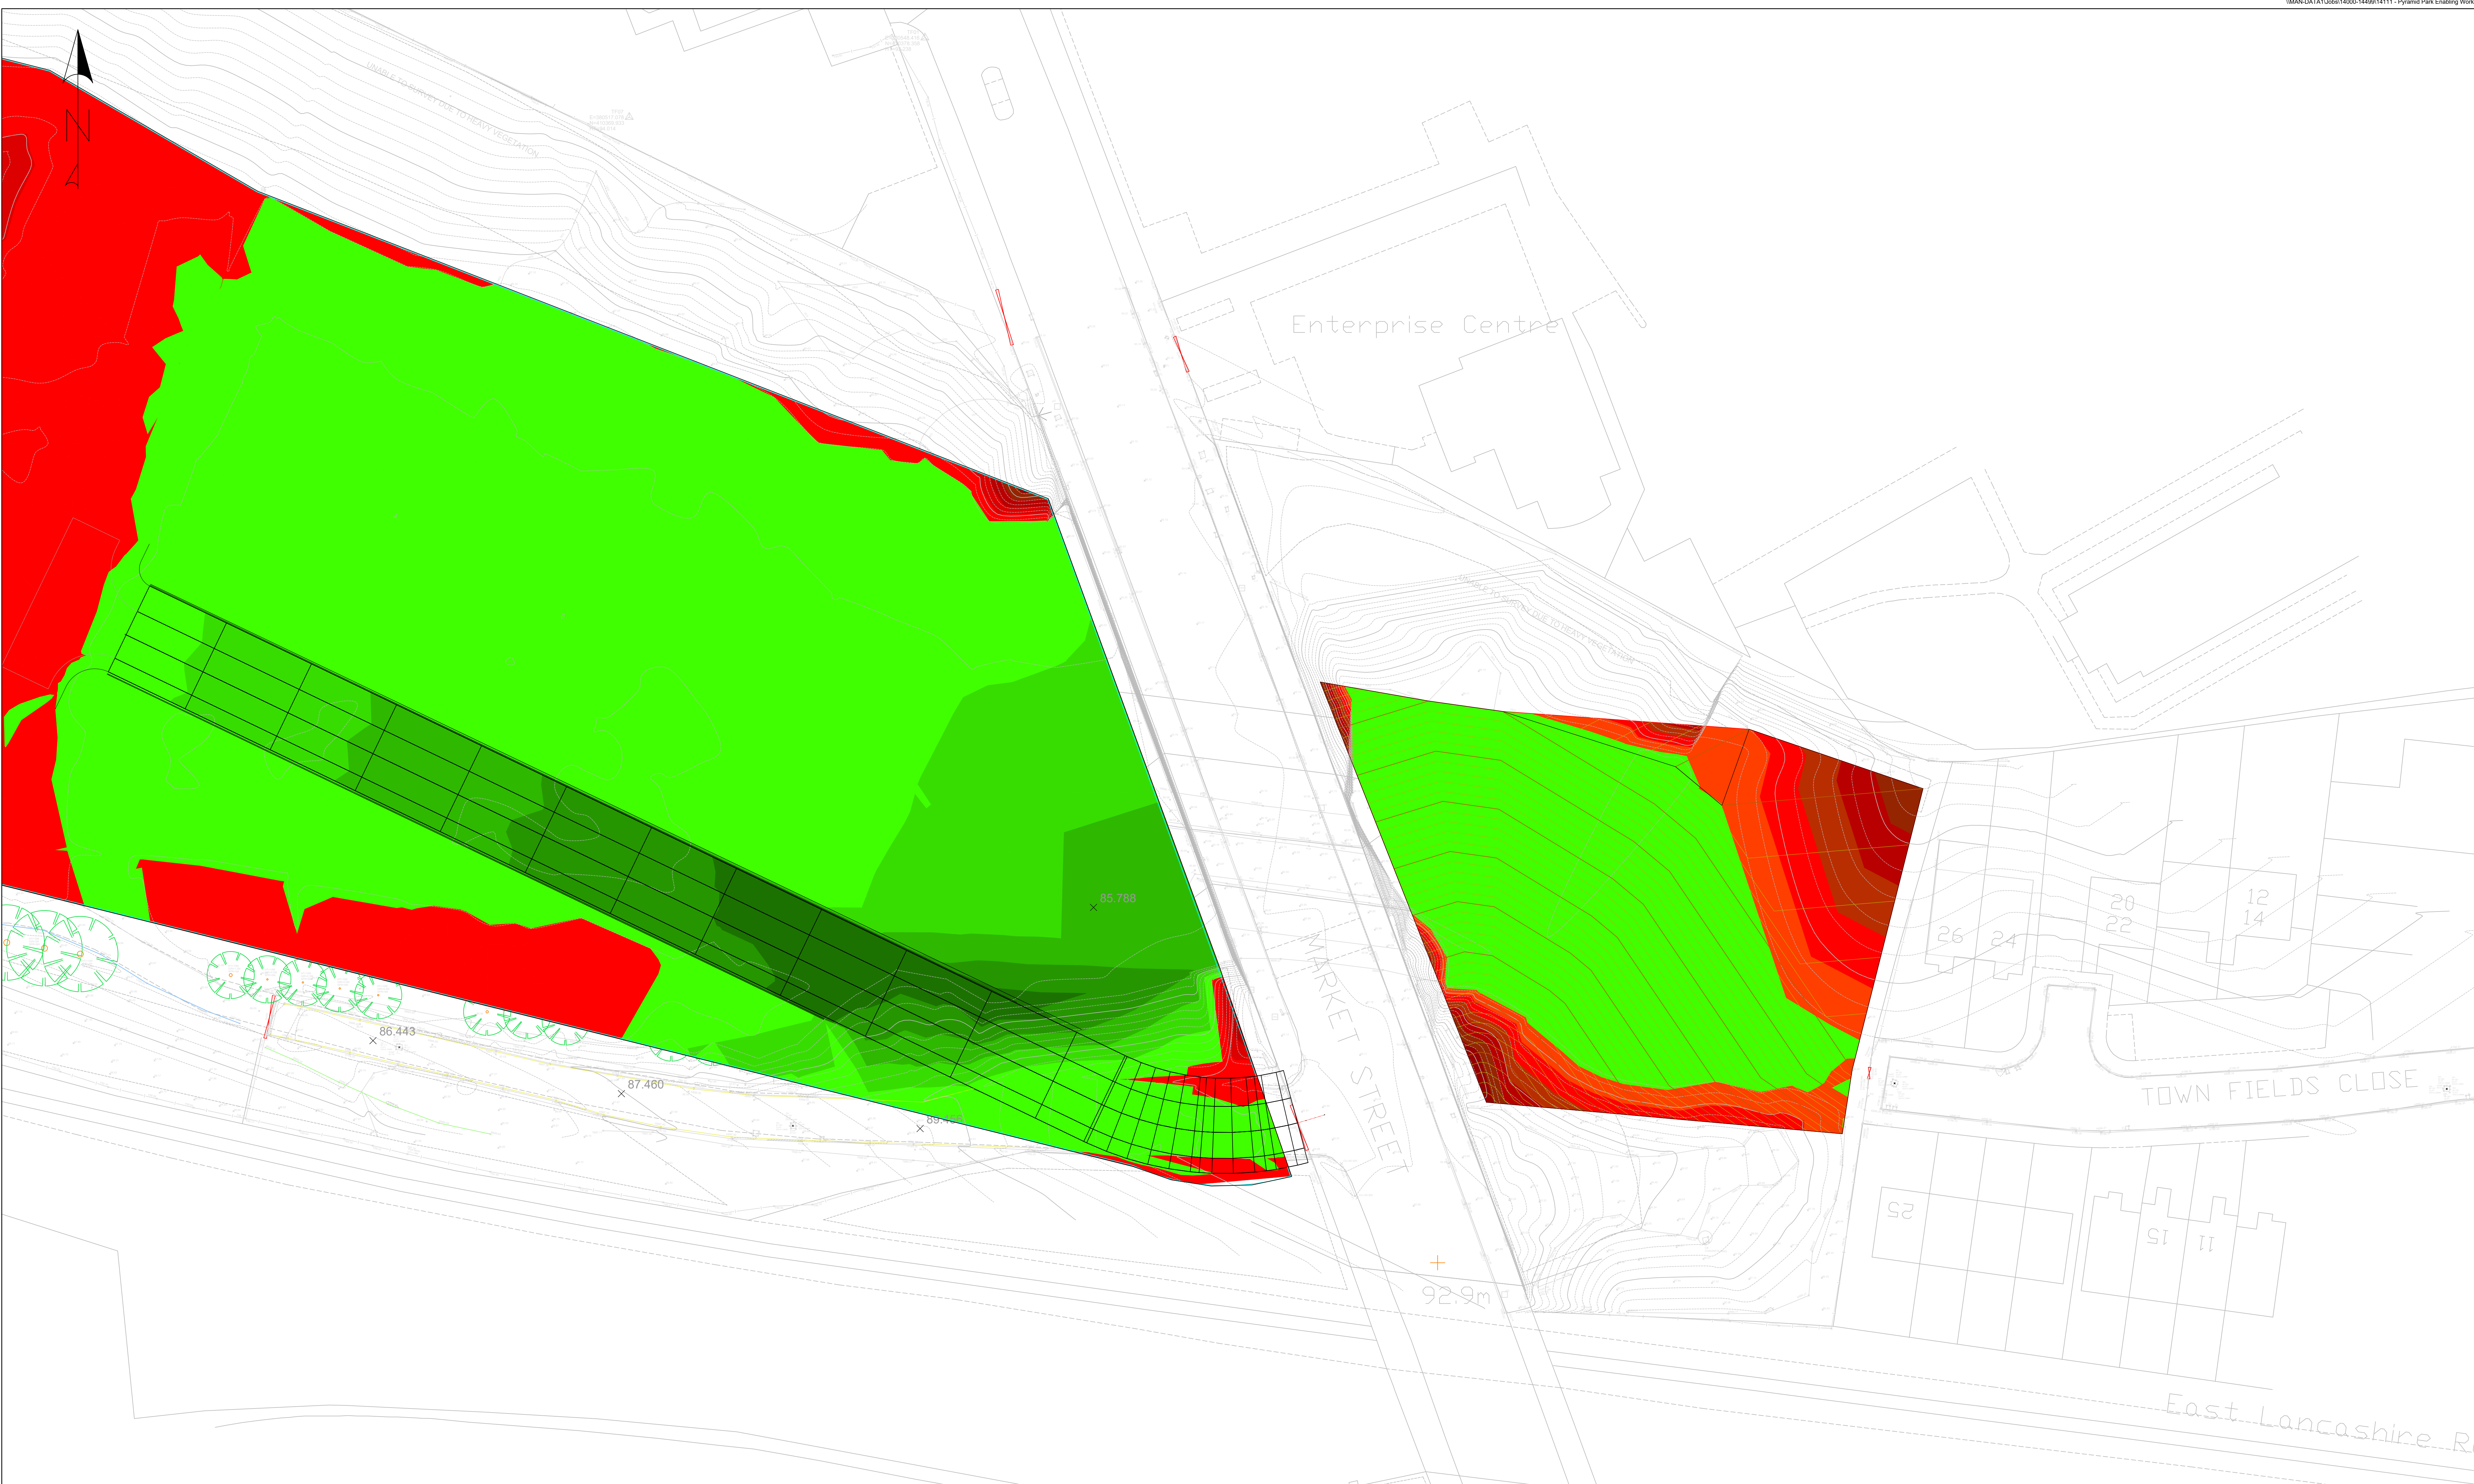

SURFACE LEVEL DATA				
NUMBER	MINIMUM LEVEL	MAXIMUM LEVEL	COLOUR	AREA
1	-6.000	-5.000	Dark Red	21.873m²
2	-5.000	-4.000	Red	177.075m²
3	-4.000	-3.000	Dark Green	353.549m²
4	-3.000	-2.000	Red	546.529m²
5	-2.000	-1.000	Red	765.359m²
6	-1.000	0.000	Red	4306.021m²
7	0.000	1.000	Light Green	5589.968m²
8	1.000	2.000	Light Green	933.892m²
9	2.000	3.000	Light Green	566.846m²
10	3.000	4.000	Light Green	416.064m²
11	4.000	5.000	Light Green	232.883m²
12	5.000	6.000	Light Green	9.218m²

Cut/Fill Summary

Name	Cut Factor	Fill Factor	2d Area	Cut	Fill	Net
cut and fill west	1.000	1.000	13919.276sq.m	5776.597 Cu. M.	8120.016 Cu. M.	2343.419 Cu. M.<Fill>
Cut and Fill east	1.000	1.000	2091.037sq.m	1170.831 Cu. M.	419.022 Cu. M.	751.810 Cu. M.<Cut>
Totals			16010.313sq.m	6947.428 Cu. M.	8539.037 Cu. M.	1591.609 Cu. M.<Fill>

- Notes**
- Do not scale from this drawing on print or electronically. Work from figured dimensions only.
 - No deviation from the details on this drawing is allowed without CampbellReith's prior permission in writing.
 - Read this drawing with all Architect's, Service Engineer's and CampbellReith's relevant details, specifications and drawings.
 - All work is to be done in accordance with the relevant specifications issued by CampbellReith, British Standard Codes of Practice, Statutory Requirements and the Contract Documents.
 - Drawing revision:
P: Preliminary Evolving drawings for approvals, tenders, billings etc.
C: Contractual Drawings authorized and approved for stage completion.
 - Drawing status:
Work in progress
S0 - Initial status
Shared (Non-contractual)
S1 - Suitable for coordination, **S2** - Suitable for information, **S3** - Suitable for review and comment, **S4** - Suitable for stage approval.
Published (For contractors purposes)
A1, Bn etc - Authorised and accepted ('n' relates to work stages)
B1, Bn etc - Partial sign-off (with comments)
CR - As constructed record document (Final Construction ONLY. Any deviations to that which is on site is not the liability of CampbellReith)
 - Work Stages:
2 - Concept, 3 - Definition, 4 - Design, 5 - Build & commission, 6 - Handover
 - Only drawings with **revision Cn** and **status A5** to be used for **Construction**.
 - Topographical information provided by Inorail in February 2022
 - TFGM boundary provided by TFGM in January 2023

LEGEND

- Cut
■ Fill

P2	Issued for information	26/06/24	LR
P1	Issued for information	15/02/24	NB
Rev	Description	Date	By

CampbellReith
consulting engineers

London020 7340 1700

Bristol0117 916 1066

☐ Manchester0161 819 3060

☐ Birmingham01675 467 484

www.campbellreith.com

Job Title	Pyramid Park Enabling Works
Client	Bury Council

Preliminary Earthworks Cut and Fill

Drawn by

Date made

Scale @ A0

Checked by

Suitability

CR Project

NB

15/02/24

1:250

BT

S1

14111

Project No	Orig	Funct	Spatial	Form	Disc	Number	Rev
14111	CRH	XX	XX	DR	C	5014	P2