



NEW LP SUBJECT TO LIGHTING DESIGN REQUIREMENTS

ALL WORK IS TO BE CARRIED OUT IN ACCORDANCE WITH THE RELEVANT SPECIFICATIONS ISSUED BY HDB, BRITISH STANDARD CODES OF PRACTICE, STATUTORY REQUIREMENTS AND THE CONTRACT DOCUMENTS.



DRIVE / PAVING / HOUSE
FOOTPRINT - 662M2

CLIENT:					
CONTRACT:					
DRAWING TITLE: PROPOSED HIGHWAYS					
PROJECT N°:	25.372	Drg N°:	C.19A	Rev:	A
PLANNING:	▪	SCALE:	1/100		
BUILDING REGS:		DATE:	25.04.24		
TENDER:		DRAWN:	AG		
CONSTRUCTION:		CHECKED:			

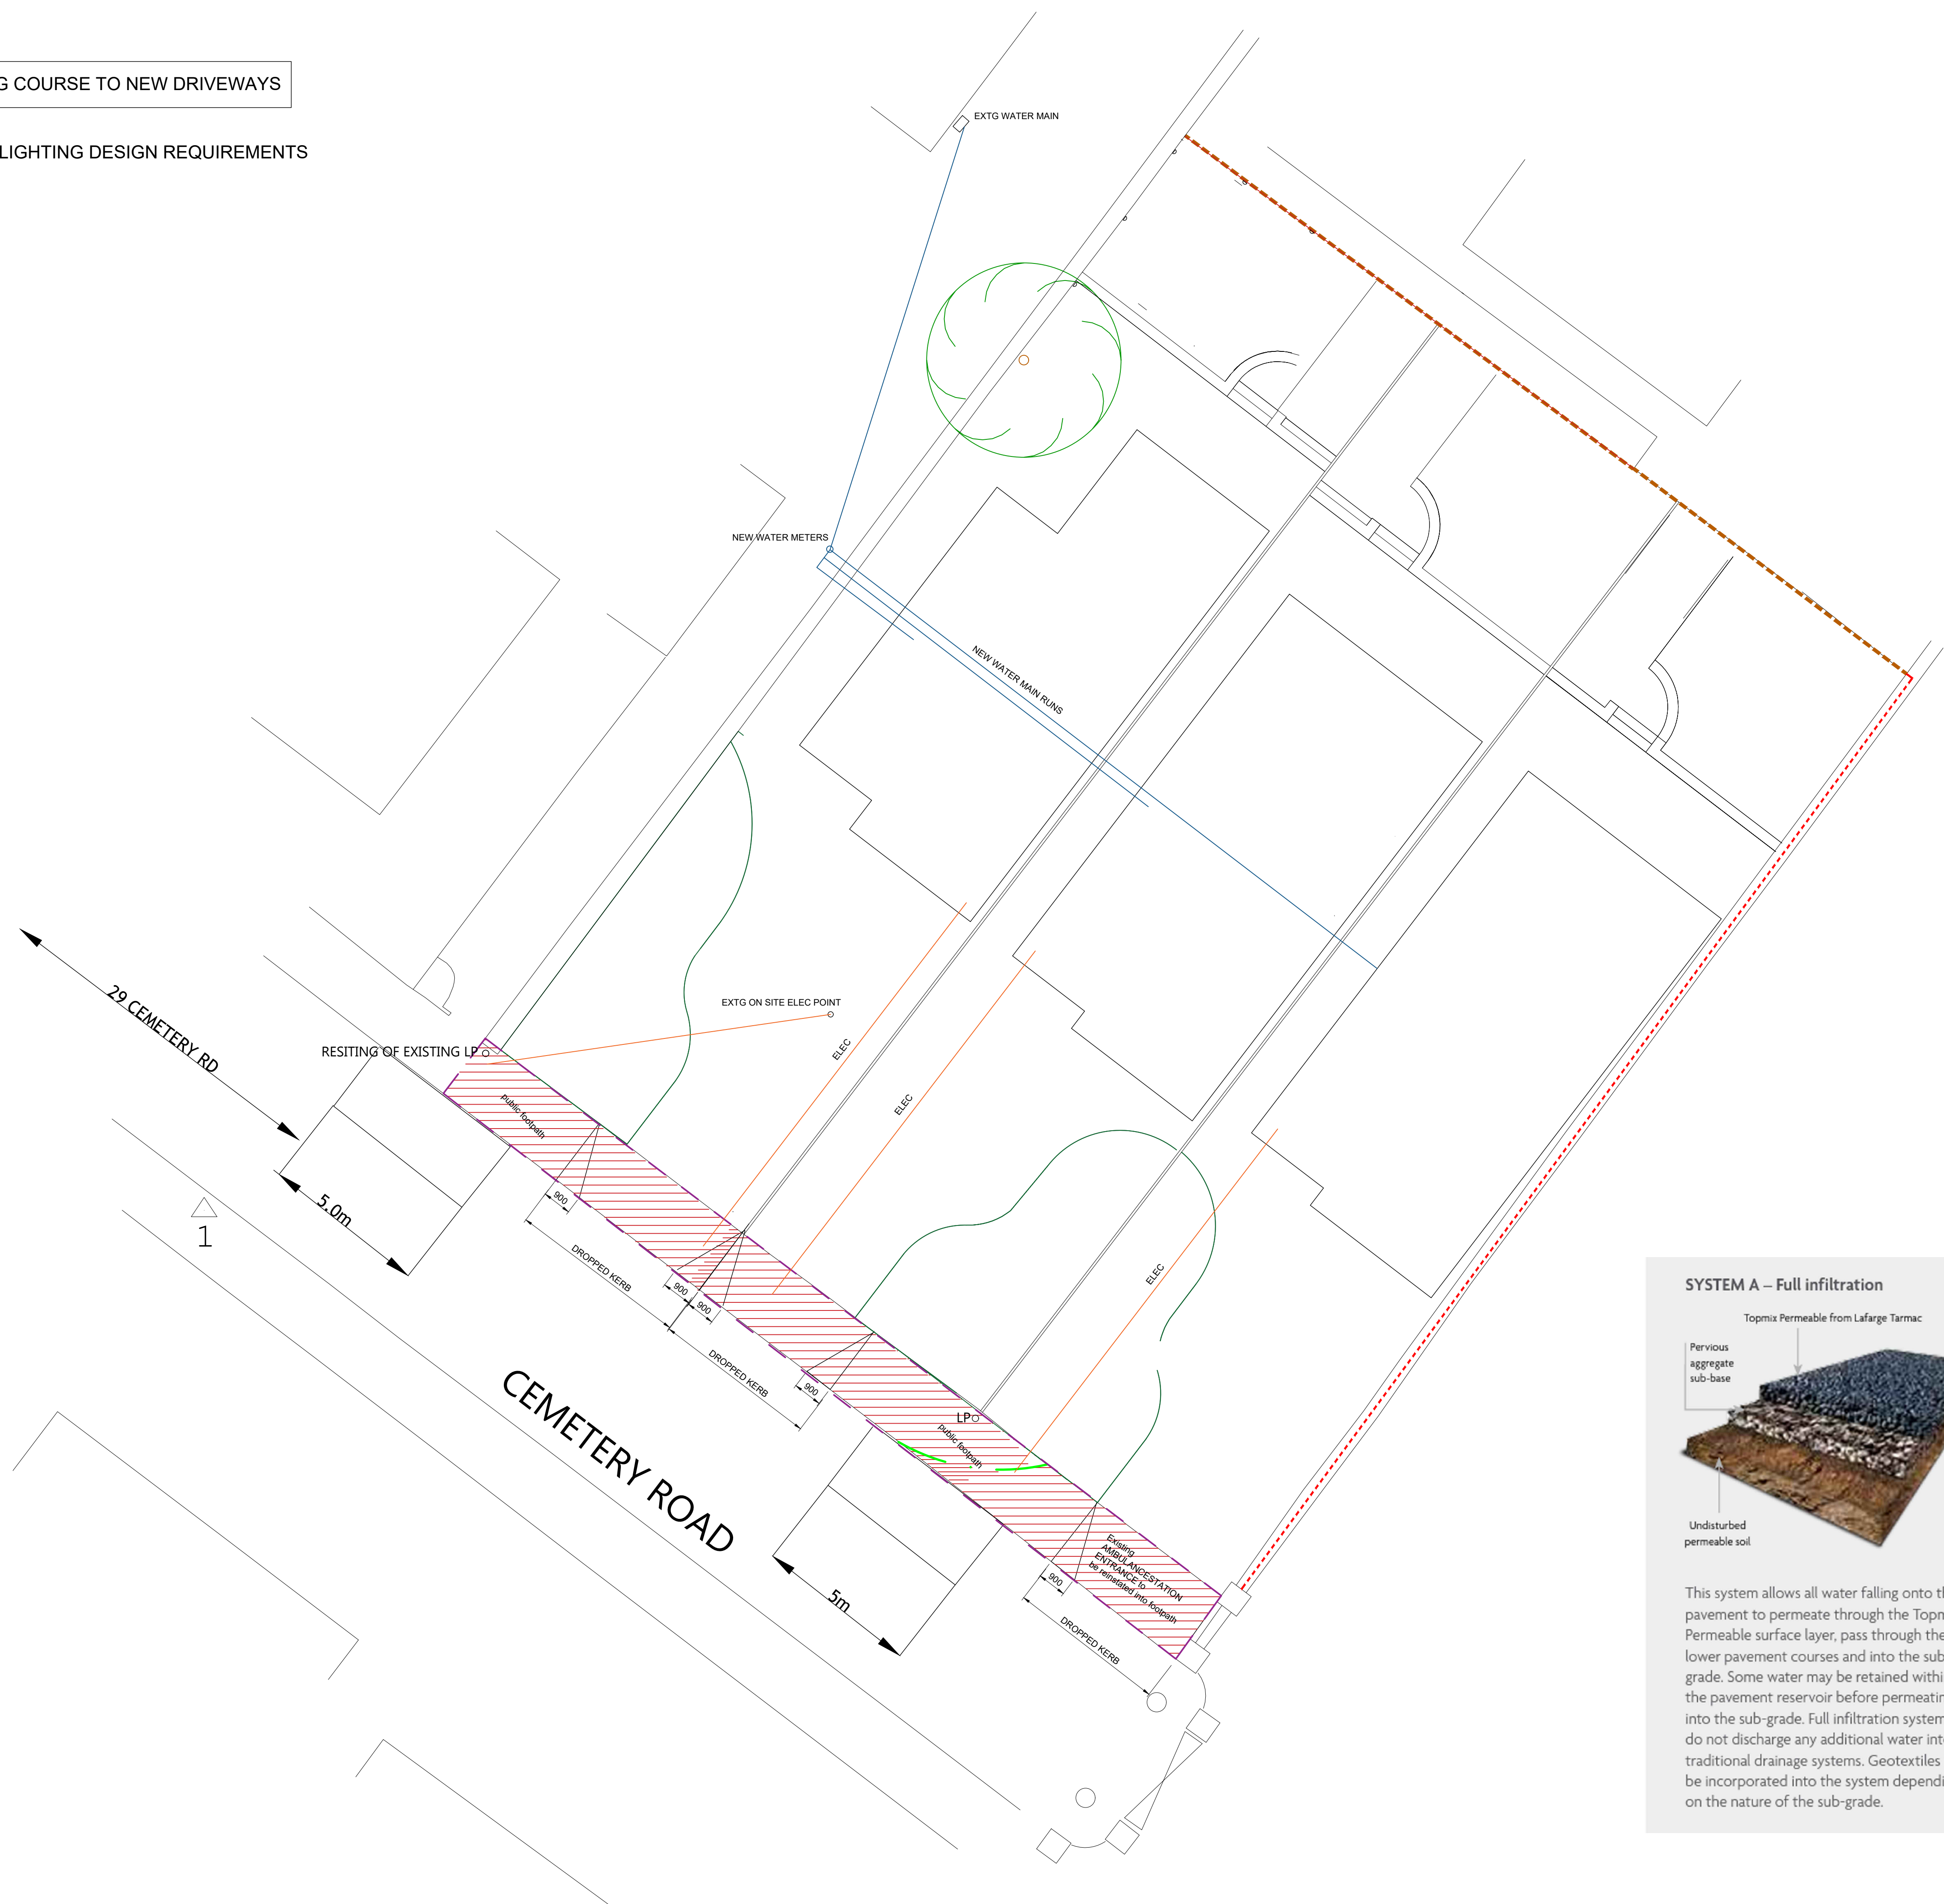

Undisturbed
permeable soil

This system allows all water falling onto the pavement to permeate through the Topmix Permeable surface layer, pass through the lower pavement courses and into the sub-grade. Some water may be retained within the pavement reservoir before permeating into the sub-grade. Full infiltration systems do not discharge any additional water into traditional drainage systems. Geotextiles may be incorporated into the system depending on the nature of the sub-grade.