

Tree Protection Area

KEEP OUT

Do not move this fence

TOWN & COUNTRY PLANNING ACT 1990

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND/OR ARE THE SUBJECT OF A TREE PRESERVATION ORDER. CONTRAVENTION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL PROSECUTION

ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN PERMISSION OF THE LOCAL PLANNING AUTHORITY

 Arbtech Consulting Limited
Unit 1, The Millstream, The Millstream Road, Chester, CH4 2DT
Tel: 01244 581179

Protective Fencing

To be erected prior to the commencement of all works on site, and retained in place throughout construction.

Default specification: To comprise either 2.4m wooden site hoarding; or a 2.3m high scaffolding framework comprising of vertical and horizontal framework, well braced to resist impacts, with uprights to be spaced at a maximum of 3.0m intervals and driven into the ground by a minimum of 600mm. On to this, standard anti-climb welded mesh panels are to be securely fixed to each other with at least two scaffold clamps and to the scaffold framework with wire.

Secondary Specification: To comprise of 2m tall welded mesh panels on rubber or concrete feet. Panels are to be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabilizer struts, which should be attached to a base plate and secured with ground pins.

All weather notices should be erected at regular intervals on the weld mesh panels with words such as "Construction exclusion zone - Keep out".

Ground Protection

The existing hard surfacing located within the RPA of T9 and group G2, as depicted in the tree protection plan (Arbtech TPP 01), should be retained for the duration of the project. If this is removed, it will be done so under direct arboricultural supervision and replaced with suitable ground protection, capable of withstanding the likely loading for the site.

New temporary ground protection should be capable of supporting any traffic entering or using the site without being distorted or causing compaction of underlying soil.

Note The ground protection might comprise one of the following:

- a) for pedestrian movements only, a single thickness of scaffold boards placed either on top of a driven scaffold frame, as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100mm depth of woodchip), laid onto a geotextile membrane;
- b) for pedestrian-operated plant up to a gross weight of 2t, proprietary inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 150mm depth of woodchip), laid onto a geotextile membrane;
- c) for wheeled or tracked construction traffic exceeding 2 t gross weight, an alternative system (e.g. proprietary system or pre-cast reinforced concrete slabs) to an engineering specification designed in conjunction with arboricultural advice, to accommodate the likely loading to which it will be subjected.


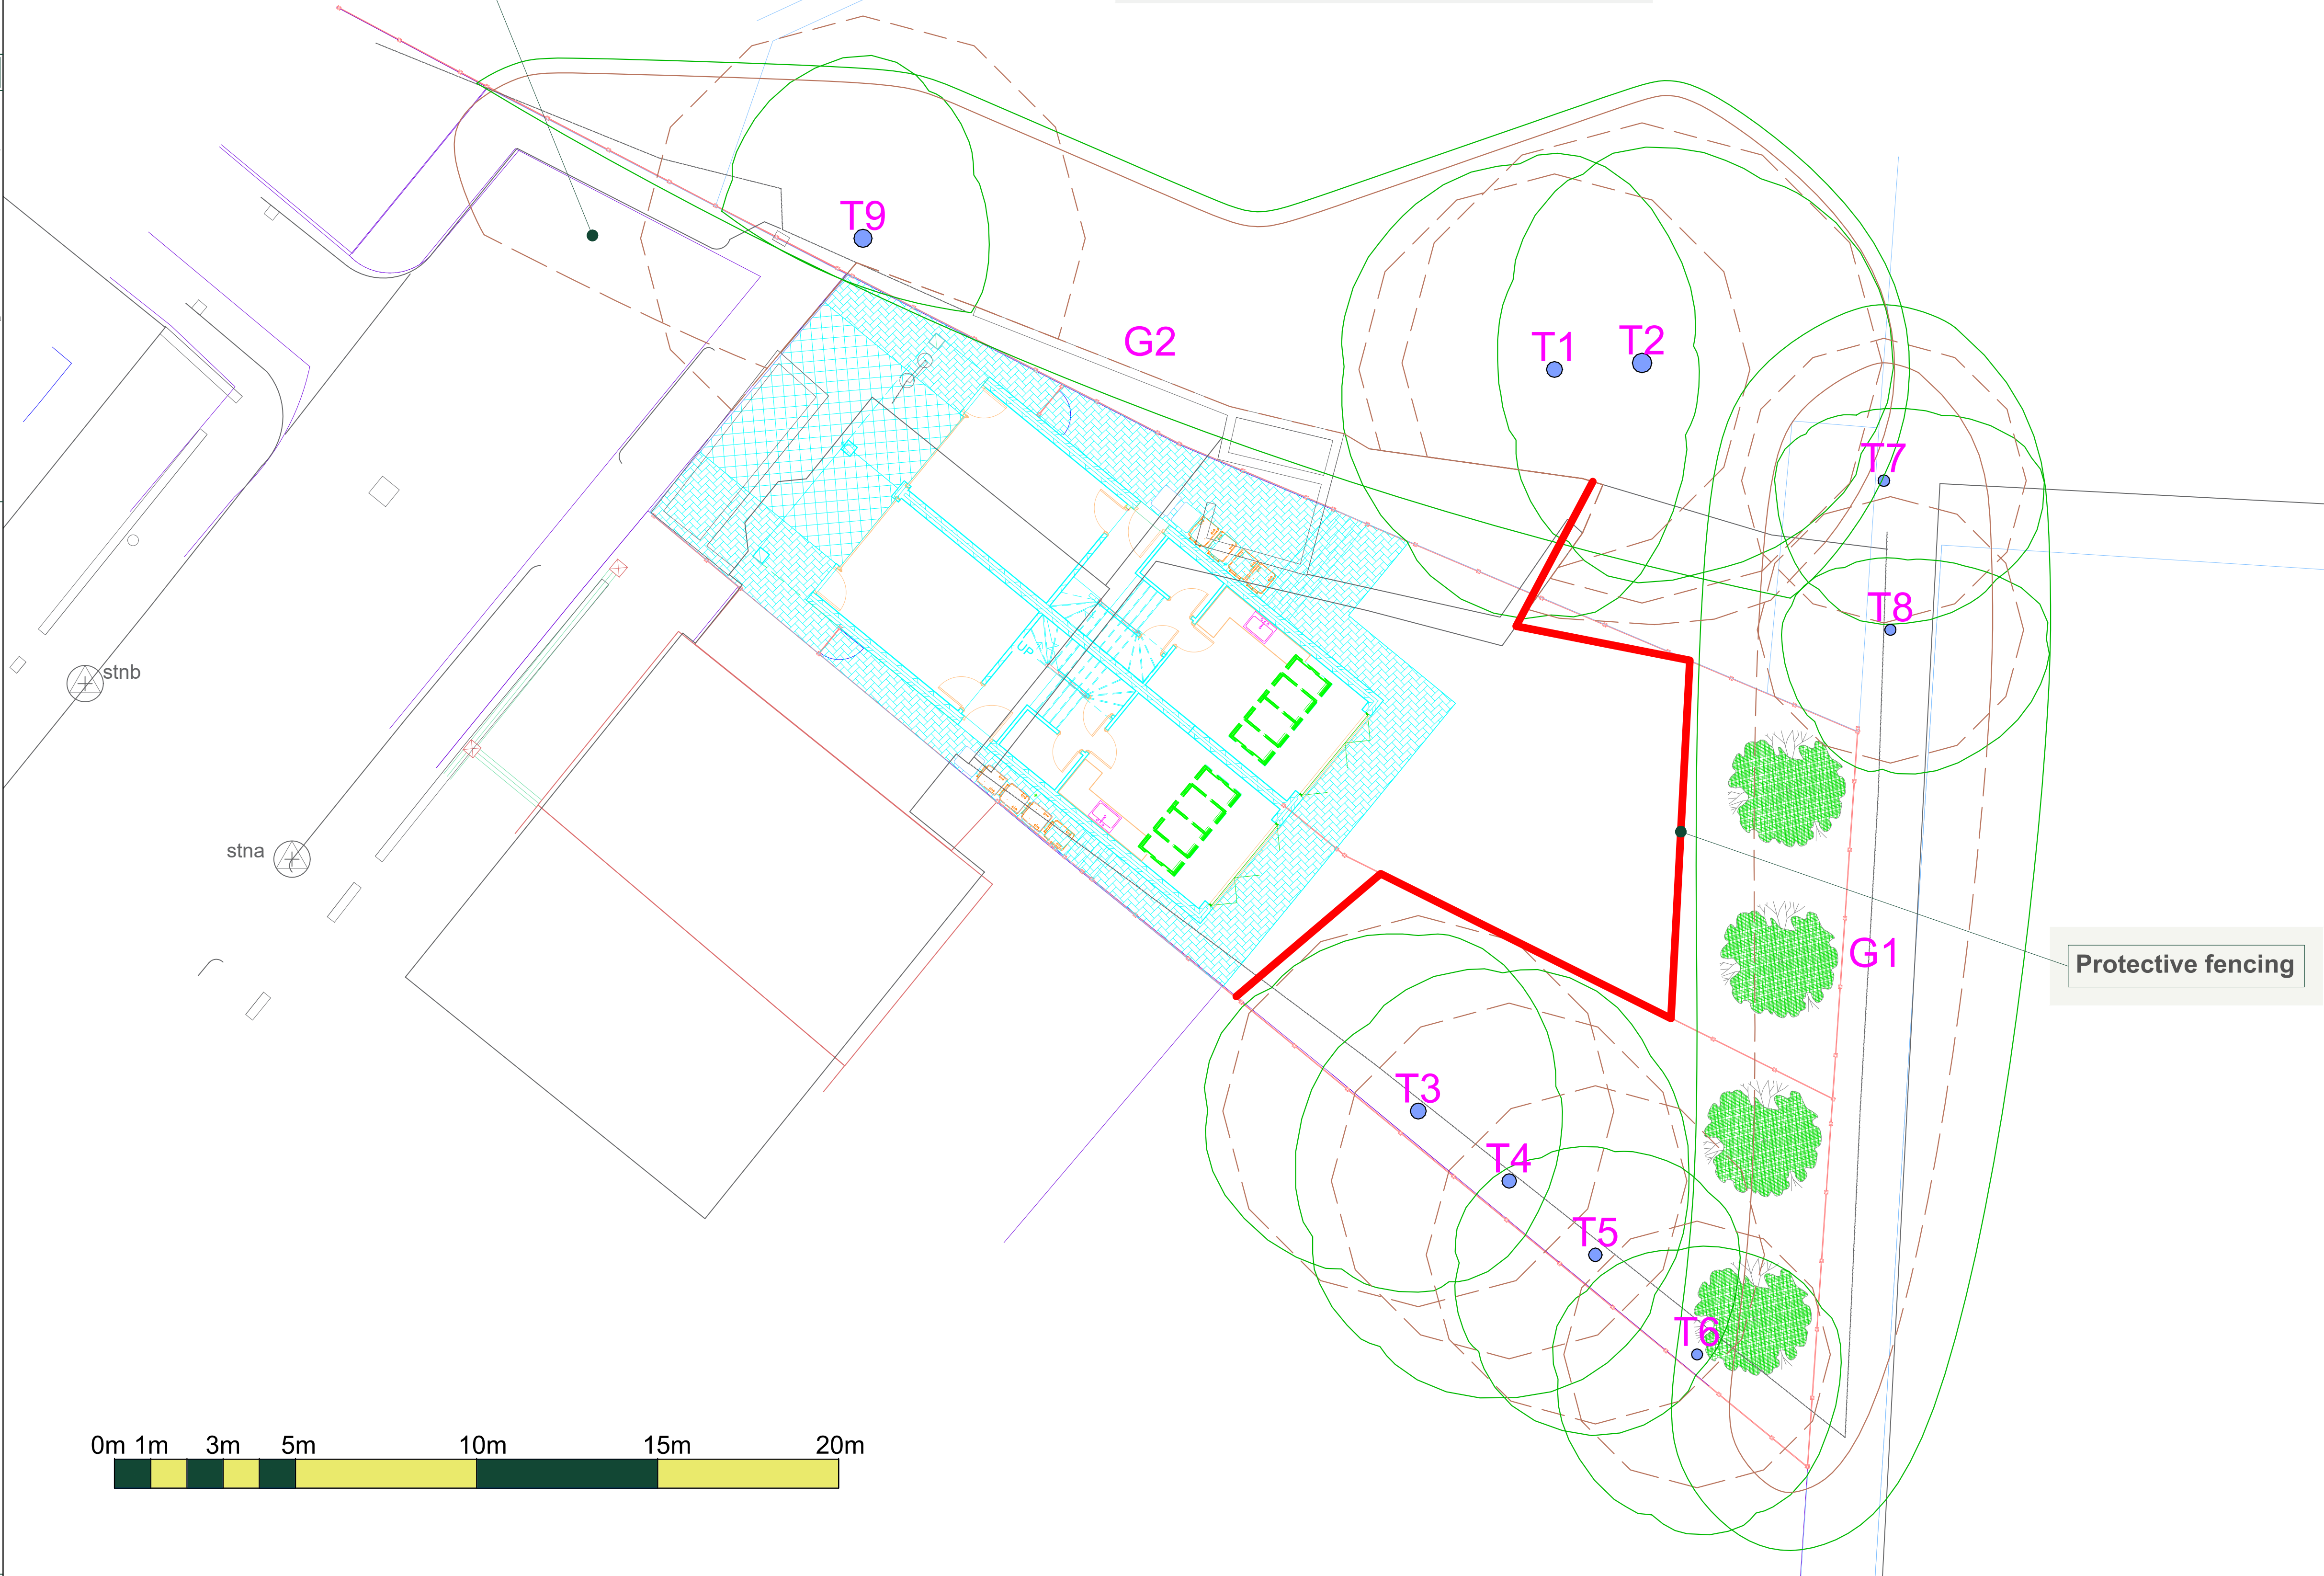
For situations other than those described in a) or b), the ground boarding is to be designed by a suitably qualified person to an engineering specification in conjunction with arboricultural advice, to be able to support the expected loading to be placed upon it.

In all cases, the objective of the ground boarding is to avoid compaction of the soil beneath, so that tree root function remains unimpaired.

Ground protection:

The existing hard surface will be retained to act as ground protection within the RPAs of retained tree T9 and group G2 for the duration of the development. If removed this should done under direct arboricultural supervision and replaced with temporary ground boarding.

Note: The RPAs of trees T1, T2, T9 & group G2 have been manipulated to display the barriers to root growth provided by the dwelling foundations, the retaining wall and the cast concreted slab.



Arboricultural Impacts

Impacts	Nos. of trees
Trees to be removed	0
Groups / Hedges to be removed (Partial removal of groups)	0 (0)
Trees with proposed incursions into RPAs	0
Groups / Hedges with proposed incursions into RPAs	0
Trees that will require pruning	1
Groups / Hedges that will require pruning	1
Trees to be transplanted	0
Groups / Hedges to be transplanted	0

Tree Work Schedule

No.	Species	Works	Category
T9	Common Ash	Prune: Reduce crown back to boundary line	B21
G2	A Group	Prune: Reduce crown back to boundary line	B2

All tree work is to be undertaken in accordance with British Standard BS 5998:2010 Tree work - Recommendations. All arising's are to be removed and the site is to be left as found. Care is to be taken of the ground around retained trees to make sure that it does not become compacted as a result of tree surgery operations. No equipment or vehicles such as timber lorries, tractors, excavators or cranes shall be parked or driven beneath the crowns of any retained trees, to prevent subsequent compaction and root death.

Arboricultural Supervision

The arboricultural consultant will be required to attend site to directly supervise all demolition and construction works that have to be undertaken within the root protection areas. This will include:

1. Pre-commencement site meeting.
2. Location of protective measures.
3. Any demolition and or excavations within or adjacent to RPAs, including foundations, hard surfacing or underground services (a non-exhaustive list).
4. Arboricultural sign off and removal of protective measures.

Arboricultural Method Statement

Please refer to Arbtech Consulting Ltd. Tree Schedule and Arboricultural Method Statement, for full details on all surveyed trees and how all aspects of the the development maybe implemented without detriment to retained trees.



Project:

24 Brookfield
Prestwich
Greater Manchester
M25 1EL

Client:

Yousef Qaisi

Drawing:

Tree Protection Plan

Based on:

01_001_B

Drawing No:

Arbtech TPP 01

Rev:

Date:

Oct 2022




Scale:

1:100 @ A1

Drawn:

AJN

Key:

Tree Nos.:	T1	Tree Canopies:		Trunks:	
RPAs:		Category 'B' trees:		Category 'B' groups:	
Category 'C' groups:		Existing Site:		Proposed Site:	

All dimensions should be checked on site. No dimensions are to be scaled from this drawing. Please notify us of any discrepancies found. Arbtech Consulting Ltd. cannot be held responsible for inaccuracies in the base drawing in which this plan is based.

This drawing is designed to reflect the principles of the layout or design only, and relates only to the protection of retained trees.

This drawing is not to be read as a definitive part of the engineering or construction designs or method statement. An architect or structural engineer should be contacted over any matters of construction, detailing or specification and for any standards or regulatory requirements relating to proposed structures, hard surfacing or underground services.

This drawing was produced in colour - a monochrome copy should not be relied upon.

© Arbtech Consulting Ltd. 2021