

HARRIER

Features:

- Slim wall pack
- Zero upward light
- IP66 (dust tight & strong water jet proof)
- IK08 (5 joules) shock resistance
- High performance energy efficient surface-mount-device (SMD) LEDs
- High quality European branded integral driver
- Two sizes available:
 - Mini
 - Midi
- As standard 4000K (cool white)
- CRI 70
- 20mm conduit entries for through wiring
- Average 100,000hrs - L80 B10

Options:

- Integral 3 hour maintained emergency (midi version only)
- Integral photocell
- 3000K (warm white) and 5000K (daylight) available - on special request
- CRI 80 available - on special request

Material:

- Body: die-cast aluminium
- Optic: polycarbonate


Finish:

- Body: powder coated
- Optic: clear



Colours:

- 02 Black
- 03 Metallic Grey



Beam Angles:

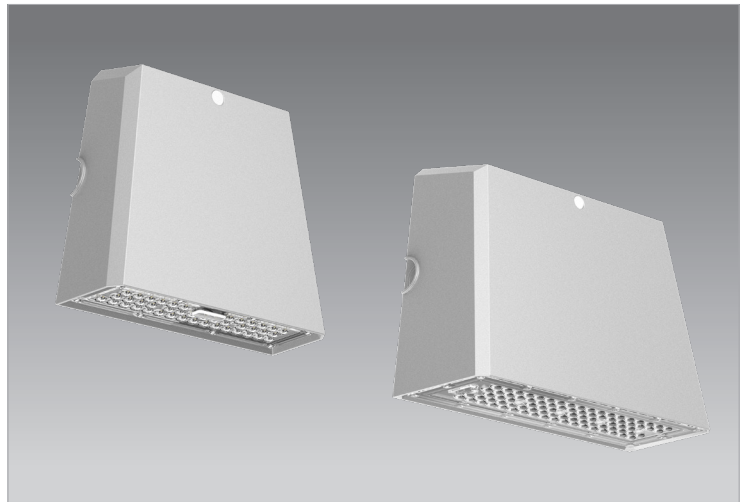

Technical



Photometrics





Harrier Mini				Ordering Code	
Wattage	Colour Temperature	Delivered Lumens	Luminous Efficacy	Black	Metallic Grey
10W LED	4000K	1593lm	159lm/W	65-271-270-402	65-271-270-403
20W LED	4000K	2899lm	145lm/W	65-272-270-402	65-272-270-403
30W LED	4000K	3791lm	126lm/W	65-273-270-402	65-273-270-403

Harrier Midi					
20W LED	4000K	2982lm	149lm/W	65-271-470-402	65-271-470-403
30W LED	4000K	4224lm	141lm/W	65-272-470-402	65-272-470-403
40W LED	4000K	5402lm	135lm/W	65-273-470-402	65-273-470-403
70W LED	4000K	8972lm	128lm/W	65-274-470-402	65-274-470-403

Options		Ordering Code
Emergency (3 hour)  (midi version only)		E3-
Photocell		/P