


IF IN DOUBT ASK

DO NOT SCALE

1.6m HIGH WALL

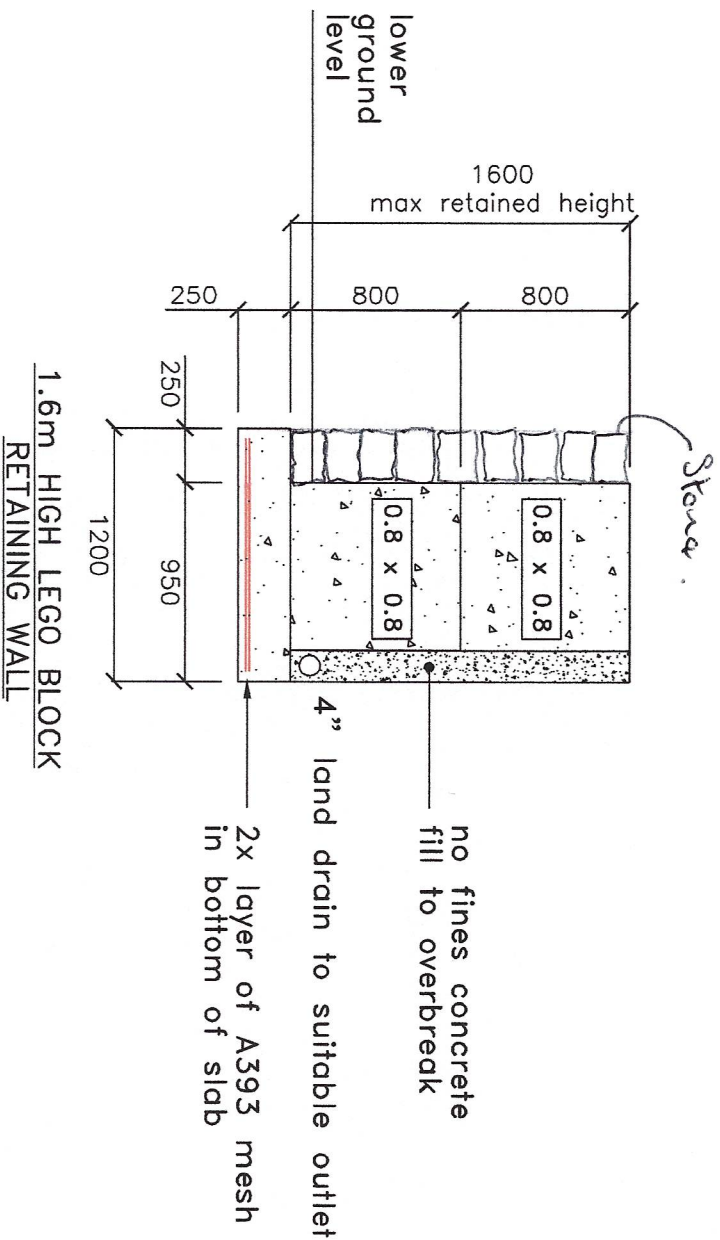

Notes:

1. All lego blocks to be formed on foundation firm sub-strata with minimum allowable GBP of 150 kN/m².
2. The lego block wall has been designed for a highway loading of 10.0 kN/m².
3. 4" perforated drain behind wall encased in free draining material taken to suitable outlet.
4. All temporary shoring works are the responsibility of the main contractor.
5. All concrete grade C35 minimum.
6. All re-bar cover 35mm.