


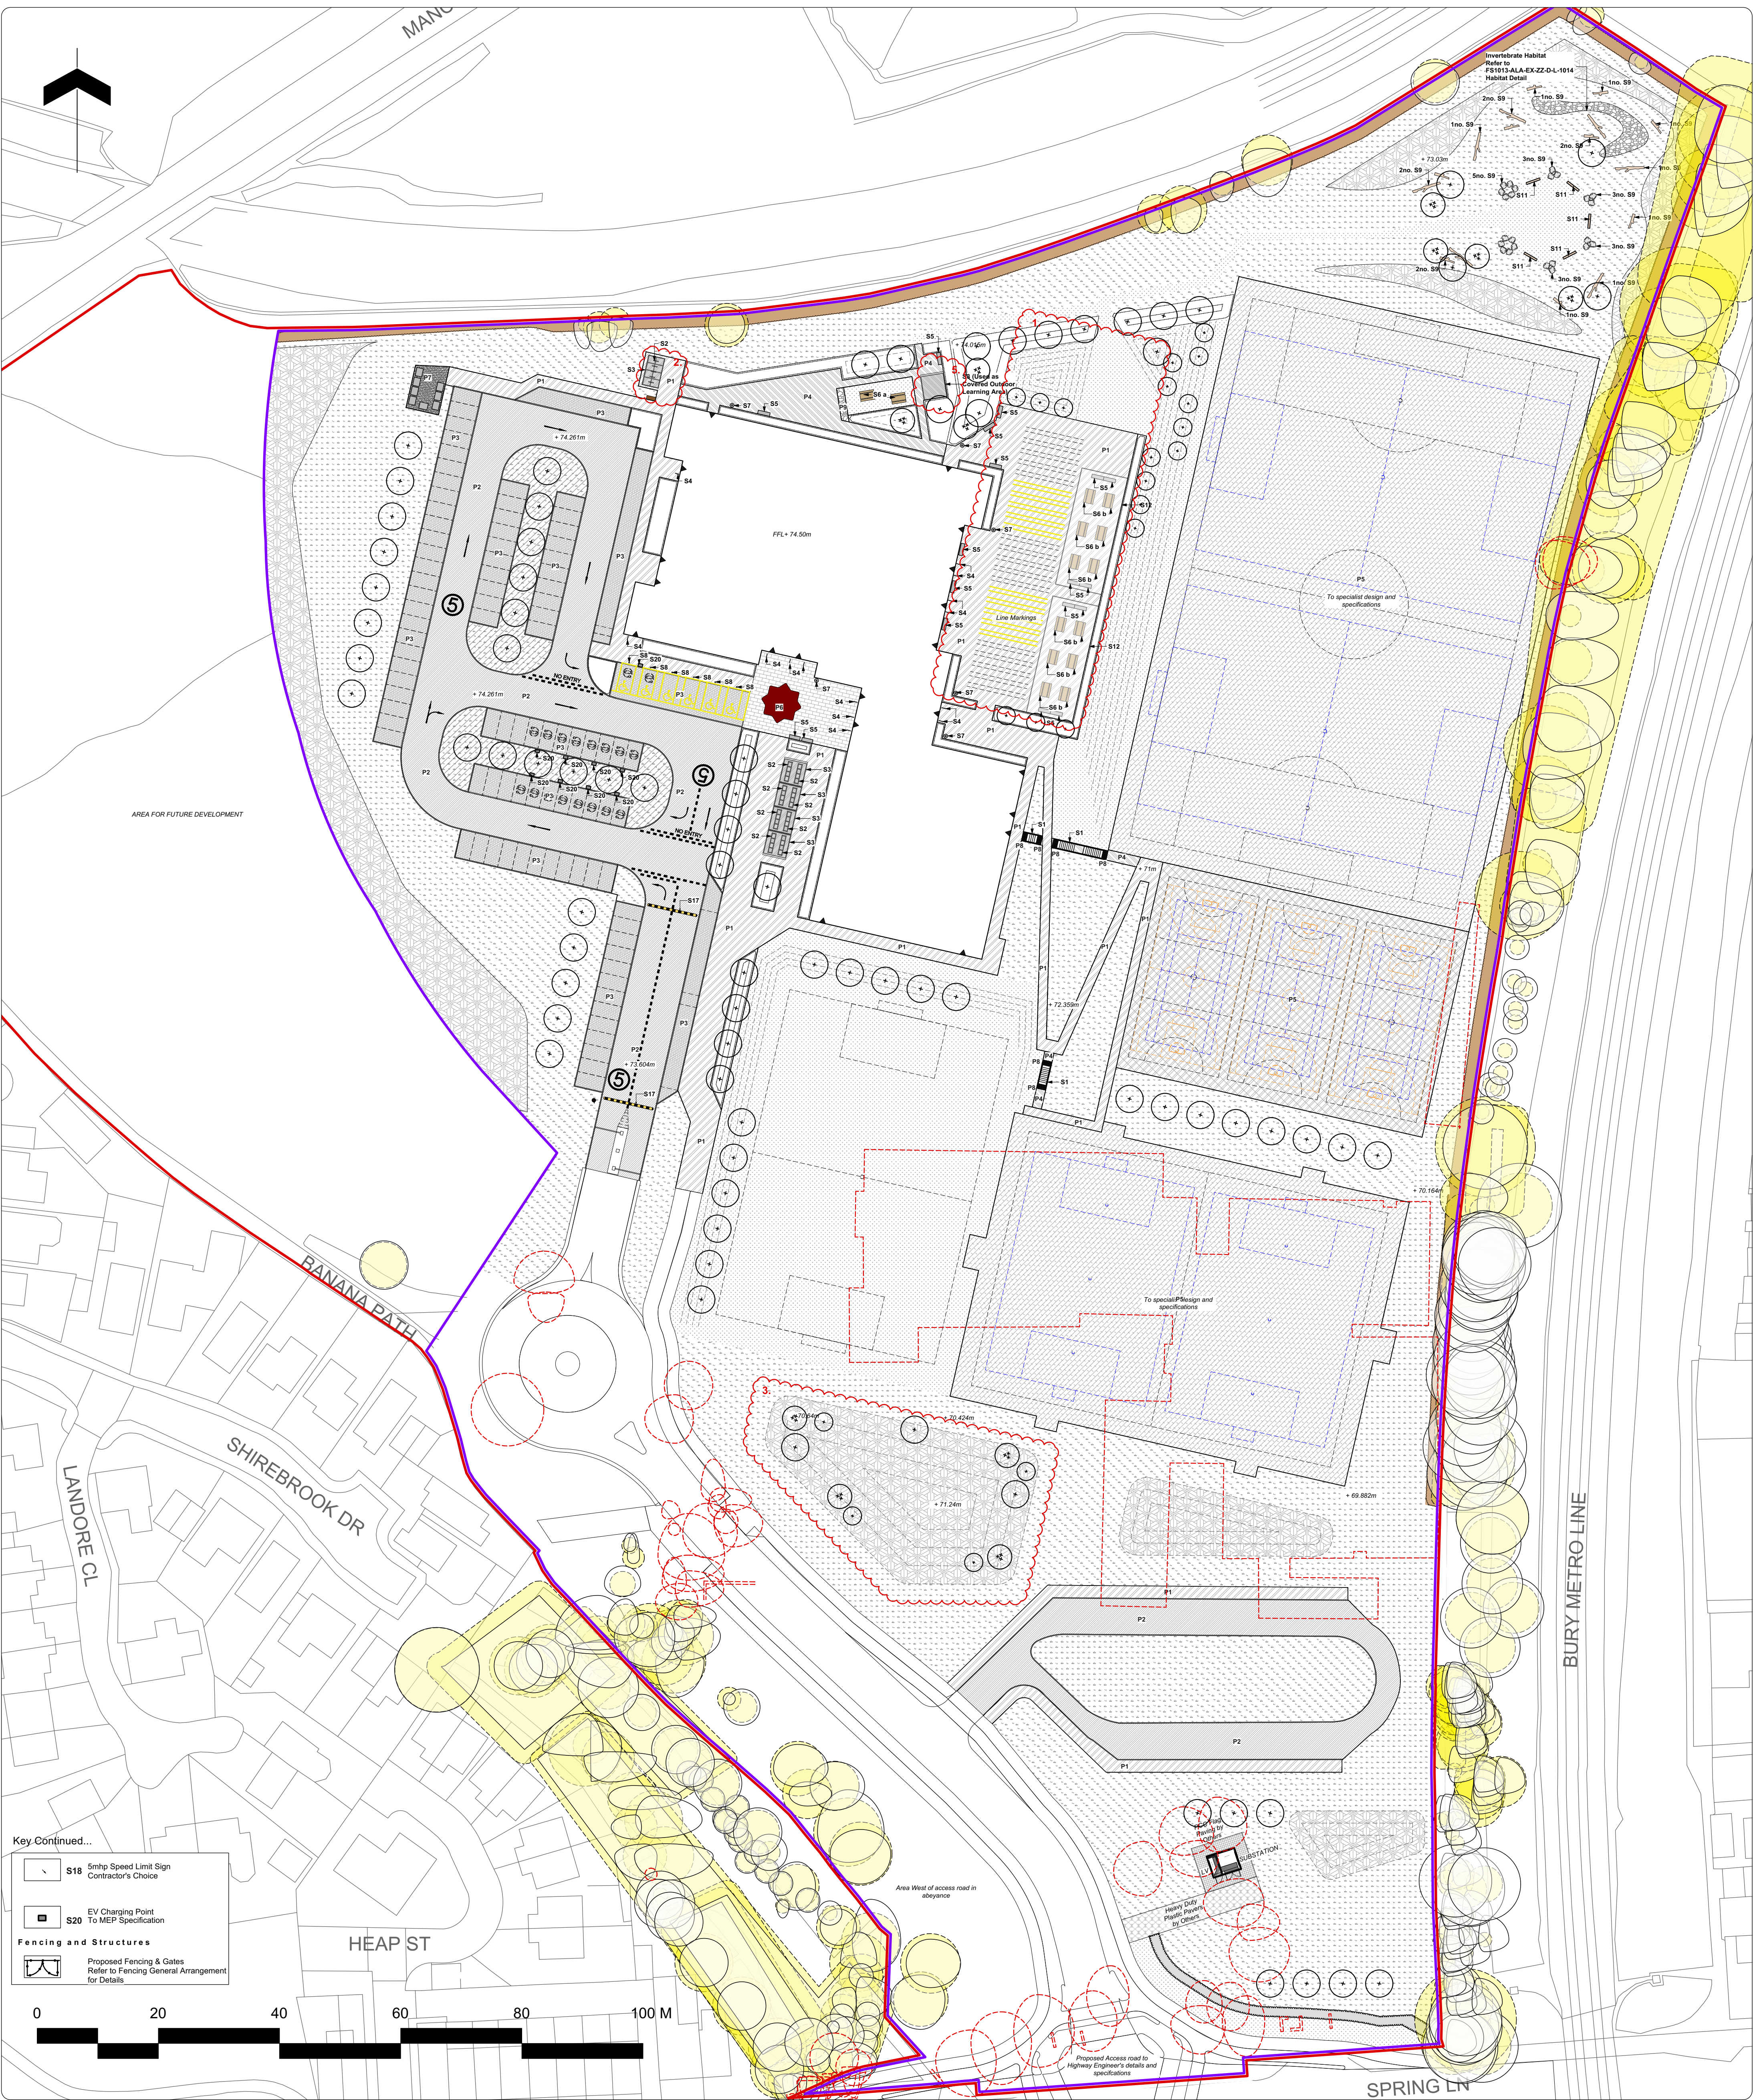

Key Continued...

S18 5mph Speed Limit Sign
Contractor's Choice

EV Charging Point
To MEP Specification

Fencing and Structures

Proposed Fencing & Gates
Refer to Fencing General Arrangement for Details

Note

- Do not scale from this drawing
- To be read in conjunction with Project Risk Register REF: FS1013-ALA-EX-XX-RR-L-00001
- To be read in conjunction with all other Landscape Architect's drawings
- To be read in conjunction with Outline Landscape Specification REF: FS1013-ALA-EX-XX-SP-L-0001

1	Drainage in dry retention basin	2.4m fencing. End user across retention basin to be 800mm deep. Basin to dry out during a maintenance event. Retaining edge.	31.07.23
2	Falling on stairs while accessing sport pitches	Stairways to be wide. Hand rails provided at intervals.	31.07.23
3	Collision between pedestrians and vehicles accessing accessible parking spaces	Stairways to be wide. Hand rails provided at intervals.	31.07.23
4	Collision between pedestrians and vehicles in car park	Landscaping features to stop vehicles from leaving the road and parking areas. Road markings to clearly define parking.	31.07.23
5	Collision between pedestrians and cyclists accessing cycle storage facilities	Use wide pedestrian cycle approach. School to manage speed on site. Clear signage.	31.07.23
6	Collision with contact with underground utilities and services	Tree pits to be located in close proximity to existing underground utilities. Avoidance of planting in close proximity to existing underground utilities.	31.07.23
7	Falling from height - 1.5m grassed bank to east of sports hall	Grassed banks designed to be in a gradient of 1:1.5. No soil and cut slopes during construction.	31.07.23
8	Collision between pedestrians and open windows	Clear soffits to window openings.	31.07.23

ID	RISK	MITIGATION	DATE MITIGATED
RESIDUAL PROJECT RISKS			

KEY

Site

- Planning Application Boundary
- Extent of Works
- Proposed Building
- Existing Building to be demolished
- Existing Tree Retained
- Root Protection Area (RPA)
- Existing Tree to be removed
- Proposed Contours

Planting

Details refer to Planting Plan

- Proposed Tree
- Proposed Multi-stem Tree
- Grass Seed
- Amenity Planting
- Meadow Planting
- Swale Meadow Planting
- Woodland Planting
- Artificial Turf
- Hedge

Hard Surfaces

- P1 Pedestrian Macadam To Engineer's Specification
- P2 Vehicular Macadam To Engineer's Specification
- P3 Permeable Concrete Block Paving Refer to School Specific Outline Specification for Details
- P4 Coloured Pedestrian Macadam To Engineer's Specification
- P5 MUGA Permeable Surface To Engineer's Specification
- P6 Concrete Block Paving Refer to School Specific Outline Specification for Details
- P7 Concrete Surfacing To Engineer's Specification
- P8 Corduroy Tactile Paving Refer to School Specific Outline Specification for Details
- P9 Sensory Trail Refer to School Specific Outline Specification for Details
- S1 Steps and Handrails Refer to School Specific Outline Specification for Details
- S2 Cycle Stands Refer to School Specific Outline Specification for Details

Furniture

- S3 Cycle Shelter Refer to School Specific Outline Specification for Details
- S4 Door Protection Barrier Refer to School Specific Outline Specification for Details
- S5 Seating Bench Refer to School Specific Outline Specification for Details
- S6 Picnic Table Refer to School Specific Outline Specification for Details
- S7 Litter Bin Refer to School Specific Outline Specification for Details
- S8 Bollards Refer to School Specific Outline Specification for Details
- S9 Ecological Enhancement Features Refer to School Specific Outline Specification for Details
- S10 Bespoke Star Seating Refer to School Specific Outline Specification for Details
- S11 Seating to habitat area Refer to School Specific Outline Specification for Details
- S12 PV Canopy Refer to School Specific Outline Specification for Details
- S17 75mm Speed Bump for Road Calming Contractor's Choice

D/E DESIGN DELIVERABLE REF: 150

DATE	REV	DESCRIPTION OF REVISION	DRAWN BY	APPROVED BY
03/09/2025	P13	1. Layout adjusted to account for increase in PV canopy size. Line marking adjusted to suit. Star seating omitted for individual seating units. Tree within star seating relocated north. 2. Layout adjusted to accommodate for gas bottle storage. 3. Dry retention basin replaced with mounding and levels altered accordingly. 4. Key amended to show 18 no. EVCP. 5. Canopy added to SEND Garden.	CH	BS
05/08/2025	C04	Key updated to include S17 and key continued.	CH	BS
30/04/2025	C03	Revised for Construction	CH	BS

REVISIONS

STATUS: **S2 - For Planning**

ares LANDSCAPE ARCHITECTS

CLIENT: **Morgan Sindall**

PROJECT TITLE: **Star Radcliffe Academy, Bury**

DRAWING TITLE: **Site Landscaping Plan - Overview**

DRAWING NUMBER: **FS1013-ALA-EX-ZZ-D-L-0004** STATUS: **S2** REVISION: **P13**

Area: Landscape Architects LTD
Gatcliffe, 51 Eyre Lane
Sheffield S1 4RB
t: 0114 276 2000
e: hello@aresdesign.co.uk
w: ares.eu.com

DRAWN DATE: 06/07/2023
ALA PROJECT CODE: ALA805