

Predicted Energy Assessment




Apartment 4, Victoria Buildings, 9-13 Silver Street, Bury,
Greater Manchester, BL9 0EU

Dwelling type:
Date of assessment:
Produced by:
Total floor area:
DRRN:

Flat, End-Terrace
31/05/2024
Samuel Carr
44.43 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP 10 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

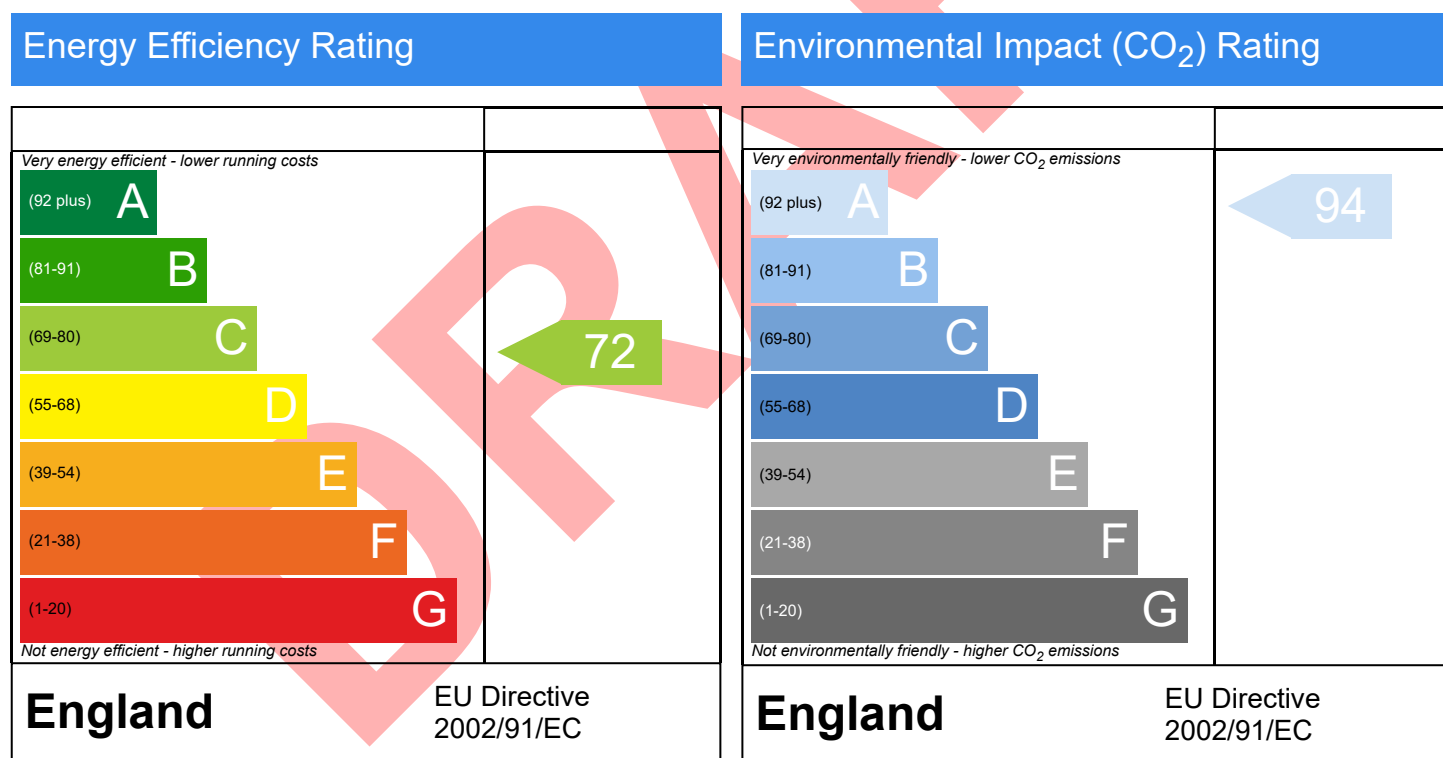

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

Summary for Input Data

Property Reference	Apartment 4	Issued on Date	31/05/2024
Assessment Reference	Apt 4 (As Designed)	Prop Type Ref	
Property	Apartment 4, Victoria Buildings, 9-13 Silver Street, Bury, Greater Manchester, BL9 0EU		

SAP Rating	72 C	DER		TER	
Environmental	94 A	% DER < TER			N/A
CO ₂ Emissions (t/year)	0.38	DFEE		TFEE	
Compliance Check	See BREL	% DFEE < TFEE			
% DPER < TPER		DPER		TPER	

Assessor Details	Mr. Samuel Carr	Assessor ID	DC16-0001
Client	Mullins Associates, Colin Mullins		

SUMMARY FOR INPUT DATA FOR: Conversion (As Designed)

Orientation	East
Property Tenure	ND
Transaction Type	6
Terrain Type	Suburban
1.0 Property Type	Flat, End-Terrace
Position of Flat	Mid-floor flat
Which Floor	1
2.0 Number of Storeys	1
3.0 Date Built	2024
4.0 Sheltered Sides	3
5.0 Sunlight/Shade	Average or unknown
6.0 Thermal Mass Parameter	Precise calculation
7.0 Electricity Tariff	Standard
Smart electricity meter fitted	Yes
Smart gas meter fitted	Yes

7.0 Measurements		Heat Loss Perimeter	Internal Floor Area	Average Storey Height
	Ground floor:	7.33 m	44.43 m ²	2.50 m

8.0 Living Area	27.00	m ²
-----------------	-------	----------------

Description	Type	Construction	U-Value (W/m ² K)	Kappa (kJ/m ² K)	Gross Area(m ²)	Nett Area (m ²)	Shelter Res	Shelter	Openings	Area Calculation Type
External Wall 1	Cavity Wall	Cavity wall; plasterboard on dabs or battens, lightweight aggregate block, filled cavity, any outside structure	0.30	110.00	18.32	11.59	0.00	None	6.73	Enter Gross Area

Description	Type	Construction	U-Value (W/m ² K)	Kappa (kJ/m ² K)	Area (m ²)	Shelter Res	Shelter
Party Wall 1	Solid Wall	Single plasterboard on dabs both sides, lightweight aggregate blocks, cavity or cavity fill	0.00	110.00	52.77		None

Description	Construction	Kappa (kJ/m ² K)	Area (m ²)
Timber Partitions	Plasterboard on timber frame	9.00	82.35

Description	Construction	Kappa (kJ/m ² K)	Area (m ²)
Party Ceiling	Concrete floor slab, carpeted	100.00	44.43

Description	Storey Index	Construction	Kappa (kJ/m ² K)	Area (m ²)
Party Floor	Lowest occupied	Concrete floor slab, carpeted	100.00	44.43

12.0 Opening Types

Summary for Input Data

Description	Data Source	Type	Glazing	Glazing Gap	Filling Type	G-value	Frame Type	Frame Factor	U Value (W/m²K)
Windows	Manufacturer	Window	Double glazed			0.76		0.70	1.40
13.0 Openings									
Name	Opening Type	Location	Orientation	Area (m²)	Pitch				
Window Bottom	Windows	External Wall 1	South	6.73					
14.0 Conservatory			None						
15.0 Draught Proofing			100 %						
16.0 Draught Lobby			No						
17.0 Thermal Bridging			Default						
Y-value			0.20 W/m²K						
18.0 Pressure Testing			No						
Test Method			Blower Door						
19.0 Mechanical Ventilation									
Mechanical Ventilation									
Mechanical Ventilation System Present			Yes						
Approved Installation			Yes						
Mechanical Ventilation data Type			Database						
Type			Balanced mechanical ventilation with heat recovery						
MV Reference Number			500196						
Configuration			1						
Manufacturer SFP			0.75						
Duct Type			Rigid						
MVHR Efficiency			90.00						
Wet Rooms			1						
SFP from Installer Commissioning Certificate			No						
MVHR System Location			Inside heated envelope (installed exclusively)						
Duct Installation Specification			Level 1						
19.1 Mechanical extract ventilation - Decentralised									
SFP	Fan/Room Type	Count							
0.14	In Room Fan Kitchen	1							
0.11	In Room Fan Other Wet Room	1							
0.00	In Duct Fan Kitchen	0							
0.00	In Duct Fan Other Wet Room	0							
0.08	Through Wall Fan Kitchen	0							
0.08	Through Wall Fan Other Wet Room	0							
20.0 Fans, Open Fireplaces, Flues									
21.0 Fixed Cooling System			No						
22.0 Lighting			No						
No Fixed Lighting			No						
	Name	Efficacy	Power	Capacity	Count				
	Example Lighting	85.00	5	425	30				
24.0 Main Heating 1			SAP table						
Percentage of Heat			100.00 %						
Fuel Type			Electricity						
SAP Code			192						
In Winter			100.00						
In Summer			100.00						
Controls SAP Code			2106						

Summary for Input Data

Delayed Start Stat	Yes
Is MHS Pumped	Pump in heated space
Heating Pump Age	2013 or later
Heat Emitter	Radiators
Boiler Interlock	Yes

25.0 Main Heating 2

26.0 Heat Networks

Heat Source	Fuel Type	Heating Use	Efficiency	Percentage Of Heat	Heat	Heat Power Ratio	Electrical	Fuel Factor	Efficiency type
Heat source 1									
Heat source 2									
Heat source 3									
Heat source 4									
Heat source 5									

28.0 Water Heating

Water Heating	Main Heating 1
SAP Code	901
Flue Gas Heat Recovery System	No
Waste Water Heat Recovery Instantaneous System 1	No
Waste Water Heat Recovery Instantaneous System 2	No
Waste Water Heat Recovery Storage System	No
Solar Panel	No
Water use <= 125 litres/person/day	Yes
Cold Water Source	From header tank
Bath Count	0

28.1 Showers

Description	Shower Type	Flow Rate [l/min]	Rated Power [kW]	Connected	Connected To
-------------	-------------	-------------------	------------------	-----------	--------------

28.3 Waste Water Heat Recovery System

29.0 Hot Water Cylinder

Internal Store	
Insulation Type	Measured Loss
Cylinder Volume	125.00 L
Loss	1.64 kWh/day
In Airing Cupboard	No

34.0 Small-scale Hydro

None											
Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

Recommendations

Lower cost measures

None

Further measures to achieve even higher standards

Typical Cost	Typical savings per year	Ratings after improvement	
		SAP rating	Environmental Impact
		0	0
		0	0
		0	0