




THE ROSE & CROWN - SCHEDULE OF WORKS

1. PROVIDE 1NO NEW COVERED PERGOLA OVERALL SIZE 6M X 6M, WITH RAL 7024 GRAPHITE GREY POWDER COATED ALUMINIUM POSTS & FRAME, COMPRISING OF 2NO 6M X 3M X 2.5M H PERGOLA UNITS CONNECTED TOGETHER, WITH 150X150MM INDIVIDUAL POSTS AND A LOUVRED ROOF SYSTEM TO EACH. ELECTRICAL SUPPLIES PROVIDED FOR 8NO ELECTRIC HEATERS WHERE SHOWN ON PLAN.
2. PROVIDE NEW 0.5M TANALIZED HARDWOOD TIMBER POST AND CHAIN TO BOUNDARY & AREAS AS INDICATED. PROVIDE NEW MATCHING PAINTED GATE WHERE INDICATED. ALL TIMBERS TO RECEIVE A PAINT FINISH
3. PROVIDE NEW RESIN BOUND SURFACING TO DESIGNATED FORMER TARMAC AREA TO NEW BEER GARDEN
SCRAPE AWAY THE EXISTING TARMACADAM READY TO RECEIVE NEW RESIN BOUND SURFACE WITH PERIMETER FLUSH SLIM CONCRETE EDGING.
4. PROVIDE 13NO. NEW TANALIZED PLANTERS 500 H X 500 X W X 1500L
5NO. NEW TANALIZED PLANTERS 500 H X 500 X W X 50L
TO TAKE PLANTS AND 2500 HIGH POSTS TO CARRY NEW FESTOON LIGHTING TO THE BOUNDARY OF THE NEW BEER GARDEN
5. ALLOW TO REPAIR EXISTING CAR PARK & WHITE LINE TO NEW LAYOUT
6. ALLOW FOR 2NO NEW VELUX WINDOWS TO EXISTING SINGLE STORY EXTENSION
7. REMOVE 2NO SMALL TREES FROM CARPARK AND ALLOW FOR NEW SURFACE TO MATCH EXISTING CARPARK


REFERENCE IMAGES

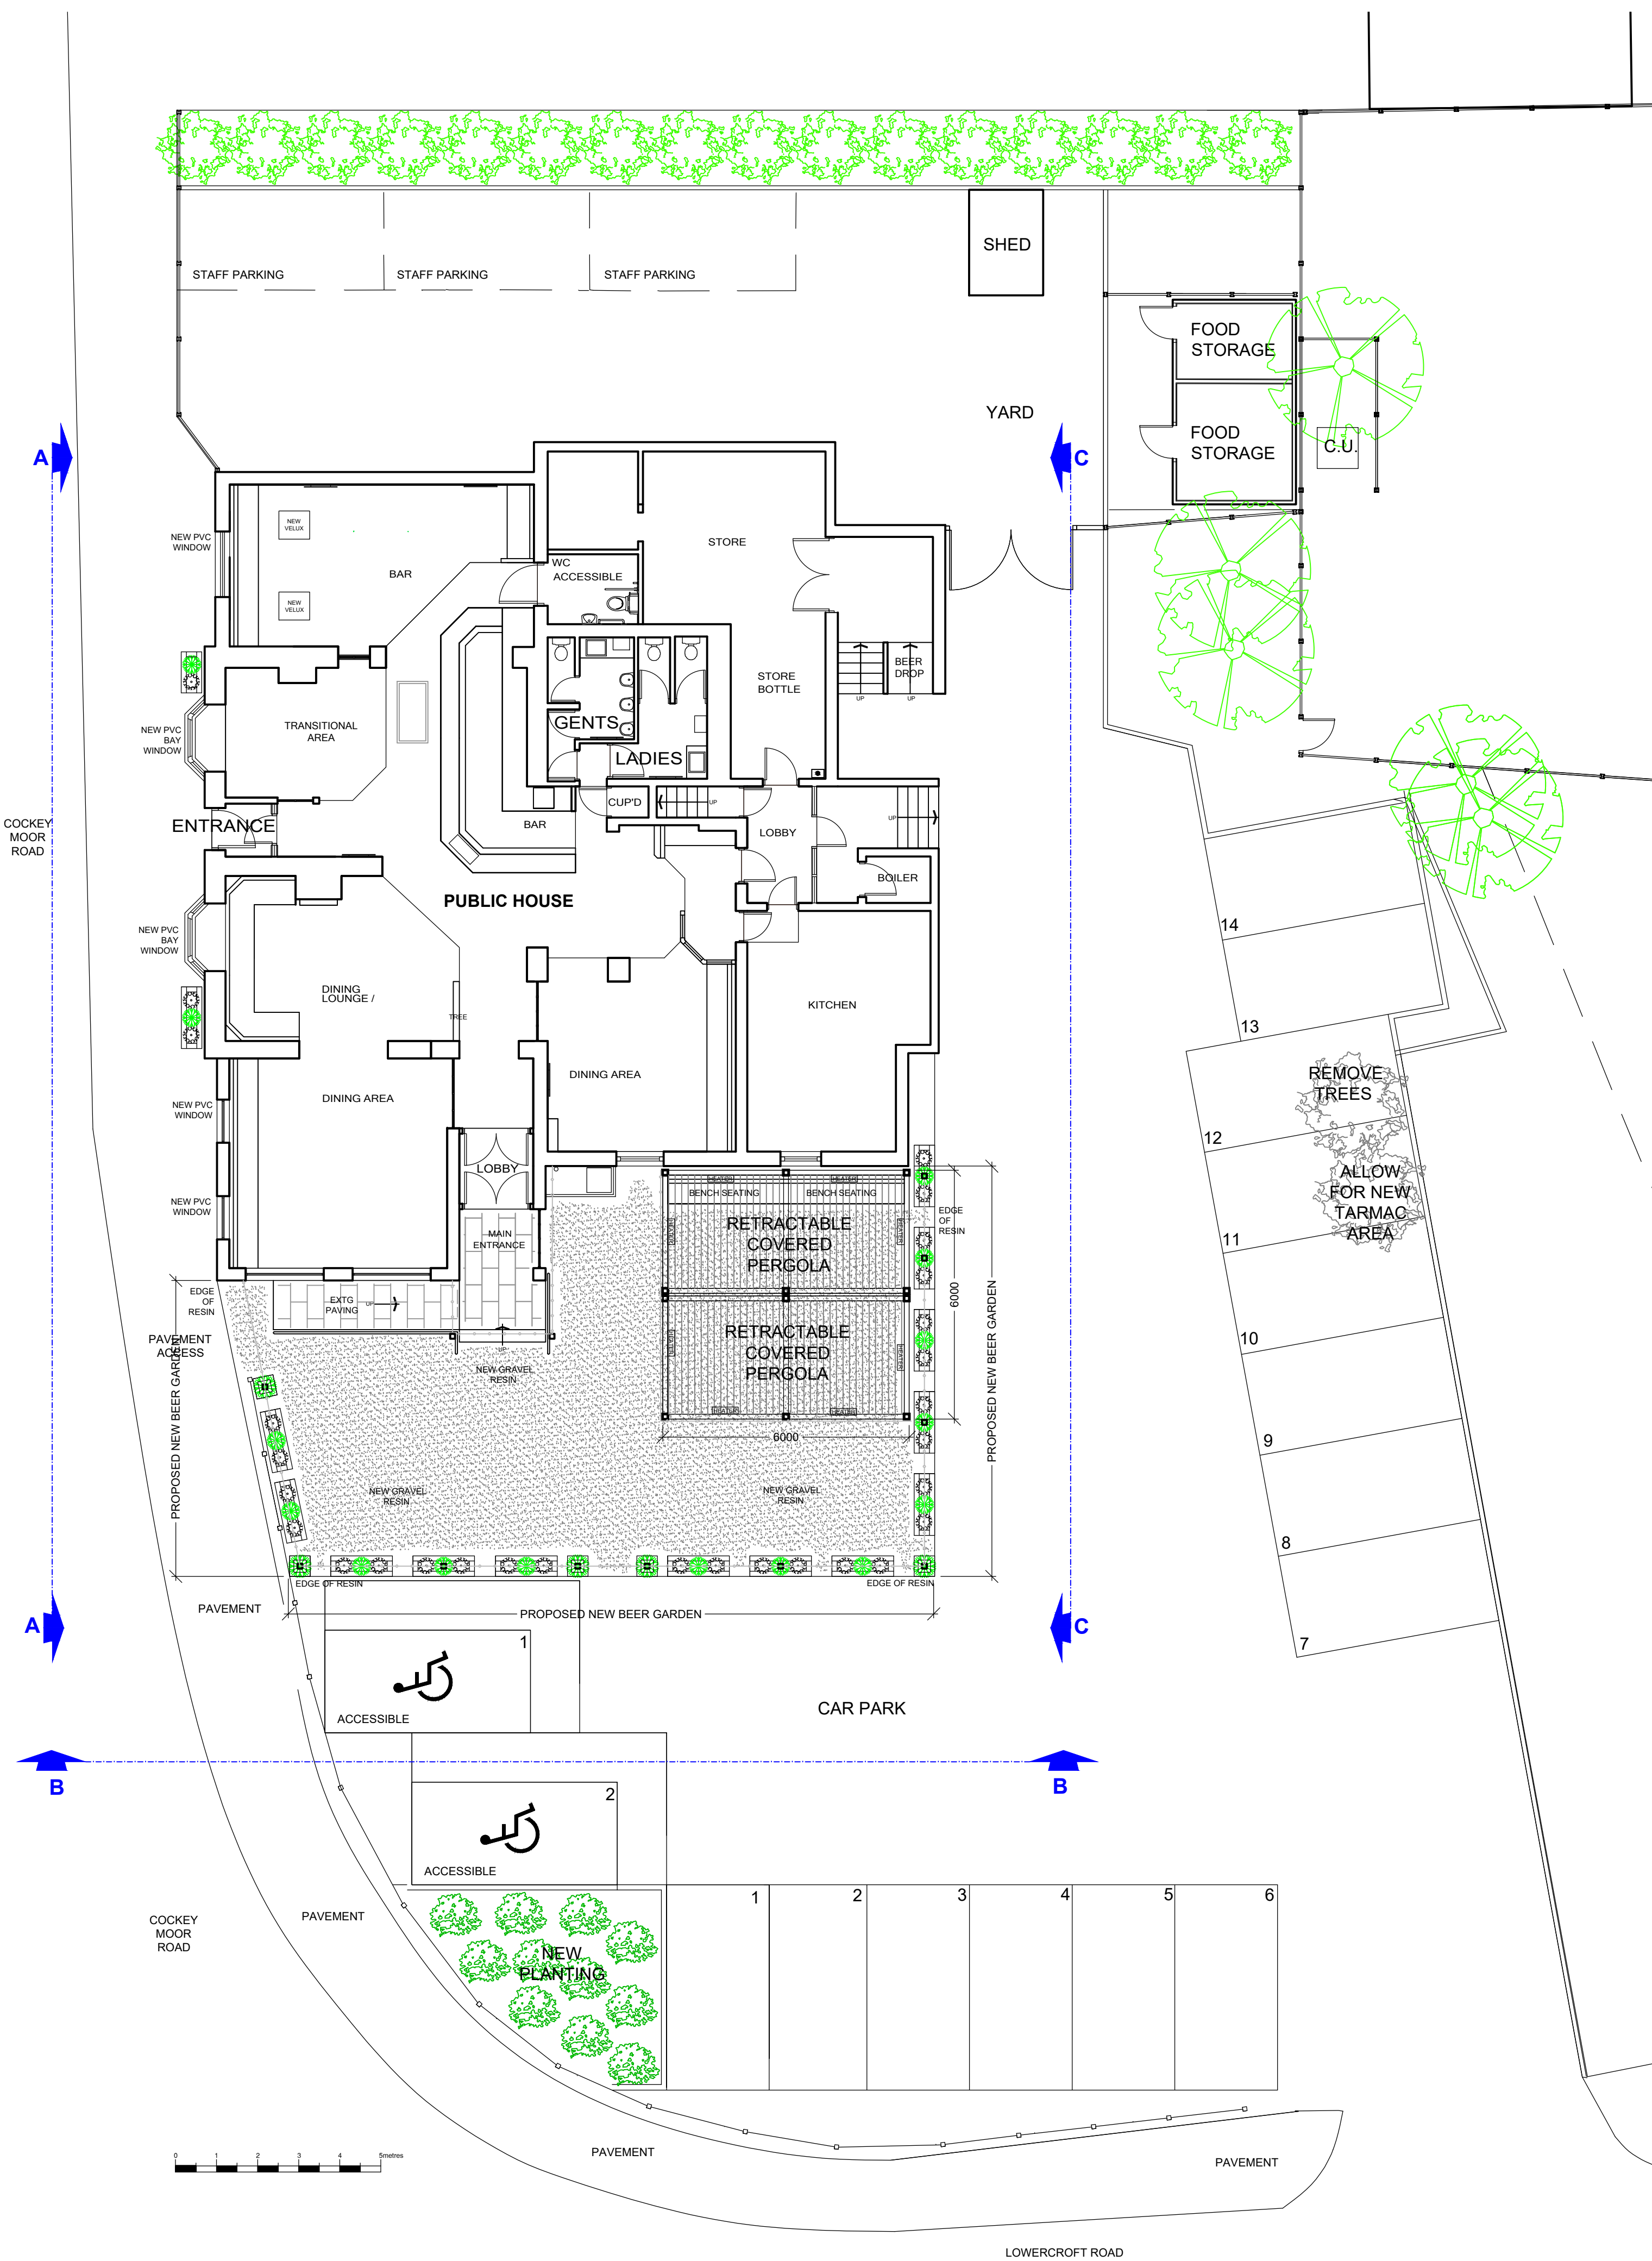

PERGOLA



PERGOLA

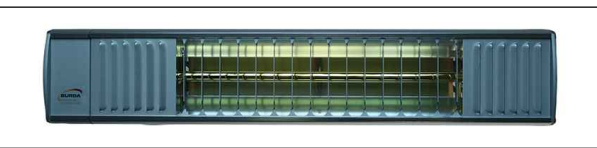

HEATER



RESIN BOUND GRAVEL



FESTOON LIGHTS

FUSION BY DESIGN

All design work and information provided on this drawing must under NO circumstances be reproduced in any form without the prior written approval by Fusion by design.

NOTE TO ALL CONTRACTORS:-

Under NO circumstances must dimensions be scaled from this drawing. All contractors must be responsible for taking and checking all dimensions upon visiting site. All contractors must advise the DESIGNER immediately, in writing, of any discrepancies.

This drawing is to be read in conjunction with the bill of quantities / specification and any related drawing. The contractor must ensure that all items detailed on this drawing are included when tendering even if not covered by the specification. The Designer must be advised in writing of all such items. Any discrepancies between drawings and specification must be resolved with the Designer prior to commencing works.

All structural work must be carried out in strict accordance with the drawing and calculations provided by the appointed Structural Engineer. All structural work must be inspected at all relevant stages by both the Structural Engineer and Building Inspector. Any changes or alterations must have their express written approval. Any costs incurred due to either claims for damages, loss of trade, etc by failing to do so will be the sole liability of the contractor.

All works must be carried out in strict accordance with all Local Authority, British & European Standards. If in doubt, it is the responsibility of the contractor to contact all relevant parties.

Under the guidance of CDM 2015, the designer will not commence work in relation to a project unless satisfied that the client is aware of their duties duly owned and obligated to them under these regulations. This drawing precludes Fusion by Design Ltd, from the role of Principal Designer unless otherwise contractually engaged.

Revision

FUSION BY DESIGN

FUSION BY DESIGN FABRIC HOUSE
HOLLY PARK MILLS, WOODHALL LANE, LEEDS LS28 5QS
Telephone 0113 2047788 Fax 0113 2047868
E-Mail info@fusionbydesign.co.uk Web www.fusionbydesign.co.uk

Client
GREENE KING

Job Title
ROSE & CROWN
2-6 COCKEY MOOR ROAD
BURY BL8 2BH

Drawing Title
PLAN/ SITE LAYOUT
AS PROPOSED

Scale 1:100	Drawing No 4163 -PL02	Revision -
Date MAR 2022		
Drawn By MSH		