

SOP TBC




This drawing is © Fordingbridge Plc 2024.
No unauthorised reproduction permitted.
All rights reserved
No dimensions are to be scaled from
this drawing (except for planning purposes).

A2

NOTES

ALL LEVEL MEASUREMENTS ARE TAKEN
FROM DATUM SET AT 0.00m.
SOP = SETTING OUT POINT
TOC = TOP OF CONCRETE PAD
GL = EXISTING GROUND LEVEL

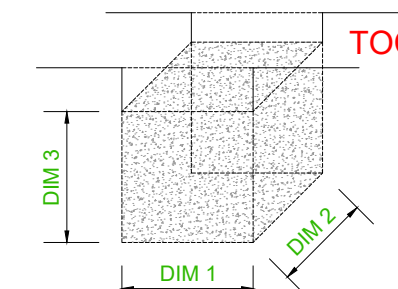

FOUNDATIONS:
DESIGNED BY FORDINGBRIDGE ENGINEER, INSTALLED BY
OTHERS.

SIZE: SEE TABLE BELOW

SPECIFICATION: C30 / 37 A393 MESH
TOP AND BOTTOM MINIMUM COVERAGE 75mm

BASED ON 100KN/SQM SOIL BEARING CAPACITY AT 1M
BELOW FINISHED GROUND LEVEL

PADS TO BE AT DISTANCE SHOWN BELOW DATUM ALL
LEVEL IN RELATION TO EACH OTHER AT EACH PAD
POSITION $\pm 10\text{mm}$.

TOP OF PADS TO BE TROWELLED SMOOTH.

GROUTING BY OTHERS: BASE PLATES TO BE GROUTED WITH A NON-SHRINK CEMENTITIOUS GROUT E.G: CONBEXTRA GP BY FOSROC, OR SIMILAR APPROVED, AND USED IN ACCORDANCE WITH THE MANUFACTURER'S DATA SHEET.
WITH MIN COMPRESSIVE STRESS OF 50 N/MM2 @7 DAYS

CONCRETE PAD SIZES			
PAD TYPE	DIM 1	DIM 2	DIM 3
TYPE A	2600mm	2100mm	700mm
TYPE B	2100mm	2100mm	700mm

REV	DESCRIPTION	BY	DATE
-----	-------------	----	------

FOR APPROVAL



Fordingbridge Plc, Arundel Road, Fontwell, Arundel, West Sussex, BN18 0SL
Tel: 01243 554455
Email: info@fordingbridge.co.uk

CLIENT
PADEL SPECIALISTS LTD

PROJECT HOLCOMBE BROOK PADEL

TITLE	GROUND PLAN
-------	-------------

DRAWN DP	DATE 20/06/25	CHECKED	SCALE 1:125 @ A
JOB NO 8731	DWG NO GP-01		REV -