

QUAD



URBAN AND FLOOD

Features:

- Column mounting 60mm spigot entry
- IP66 (dust tight & strong water jet proof)
- IK09 (10 joules) shock resistance
- Available in 4000K (cool white)
- CRI >70
- Average 100,000 hrs LED life – L70 B10
- 1–10V (analogue) dimming, DALI (digital) dimming, 5 step double level dimming, integrated thermal protection and surge protector as standard

Options (on special request):

- 3000K (warm white) LED colour temperature
- Alternative RAL finishes (minimum order quantities may apply)
- Light pollution shields

Material:


- Body: die-cast aluminium

Colour:


02 Black



Technical



Photometrics

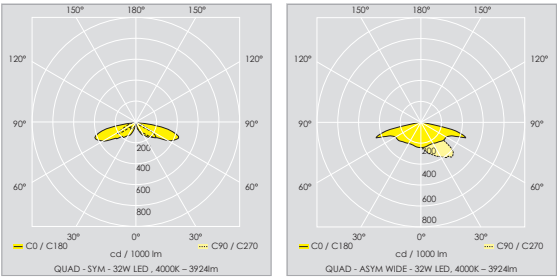

Quad						Ordering Code	
Wattage	Colour Temperature	Delivered Lumens	Luminous Efficacy	Weight (Kg)	Windage (m²)	Symmetrical 	Asymmetrical Wide 
32W LED	4000K	3924lm	123lm/W	7.9	0.087	75-202-071-402	75-202-072-402
64W LED	4000K	7959lm	124lm/W	7.9	0.087	75-204-071-402	75-204-072-402