


A1
1
2
3
4
5
6
7
8
9
10
11

A B C D E F G H I J K L M N

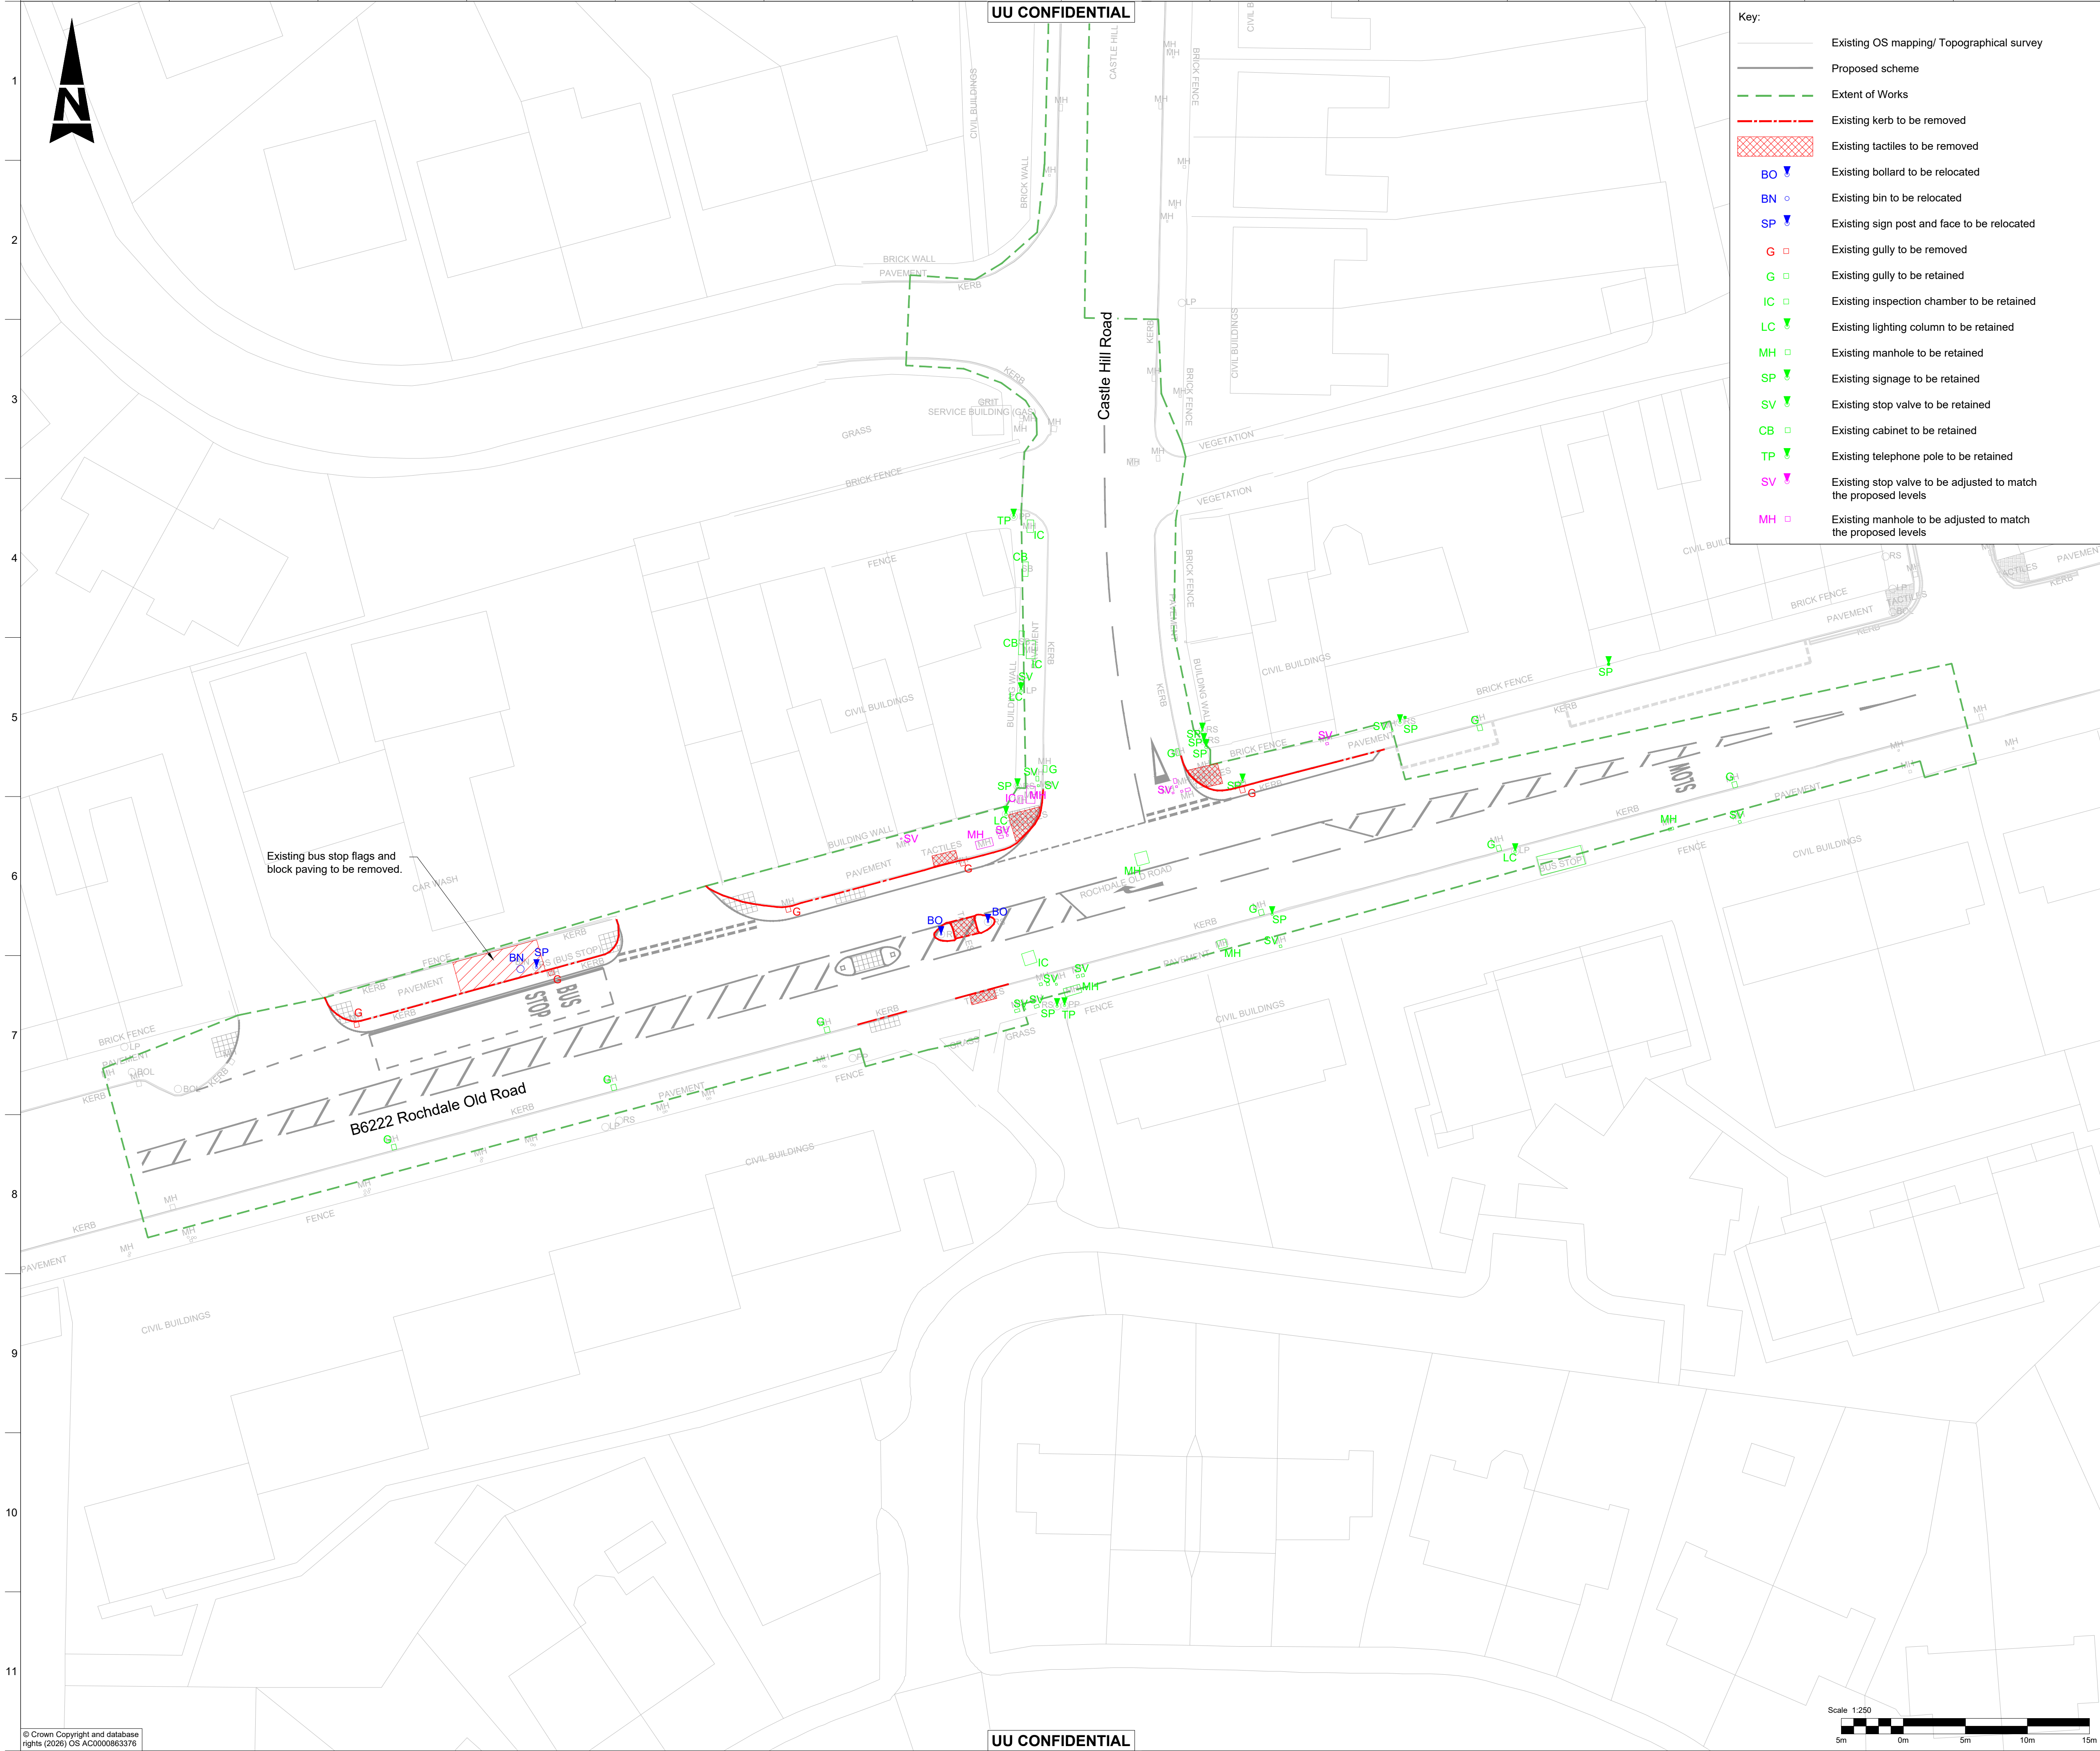

Key:

- Existing OS mapping/ Topographical survey
- Proposed scheme
- Extent of Works
- Existing kerb to be removed
- Existing tactiles to be removed
- Existing bollard to be relocated
- Existing bin to be relocated
- Existing sign post and face to be relocated
- Existing gully to be removed
- Existing gully to be retained
- Existing inspection chamber to be retained
- Existing lighting column to be retained
- Existing manhole to be retained
- Existing signage to be retained
- Existing stop valve to be retained
- Existing cabinet to be retained
- Existing telephone pole to be retained
- Existing stop valve to be adjusted to match the proposed levels
- Existing manhole to be adjusted to match the proposed levels

- Notes:
- All dimensions are in Metres unless noted otherwise. All levels are in Metres above Ordnance Survey Datum. Ordnance Survey mapping license number AC0000863376.
 - For General Arrangement, refer to drawing 80061155-ARP-HAHWH-NA-DR-H-00002.
 - Site clearance information is based on Topographical Survey drawing HARP-SUR-78100MCLS-04-2D-000002-P01 by Survey Solutions dated September 2025.
 - Details for resetting chamber frame and lids are to be coordinated by the Contractor.
 - All chambers are to be adjusted as appropriate as per proposed design.
 - Items removed to be offered to Bury Metropolitan Borough Council Council for retention and reuse, otherwise the Contractor is responsible for removal off-site and safe disposal.
 - The Contractor is responsible for coordinating all electrical disconnections/ connections associated with street lighting signage, bus stops etc.
 - Existing road lighting columns/ illuminated traffic signs which are to be removed or relocated, shall be disconnected from electric connection.
 - All existing road markings that conflict with the proposed markings are to be removed in area that are not to be resurfaced either by high pressure water blasting technique or similar process to be approved by the overseeing organisation.
 - For the extent of resurfacing, refer to pavement drawing 80061155-ARP-HAHWH-NA-DR-H-00007. Where any tree or vegetation is felled or removed the stump/ root system must be ground down or otherwise removed.



Key Plan
NTS

Rev	Date	Description	By	Chkd	Appd
P01	17/12/25	RSA2 Issue	GC	CW	AG
P02	05/06/26	Previous revHARP-ARP-HAHWH-DR-H-000005 Issue for S278 approval	SR	CW	AG

ARUP
STRABAG

Keyplan

North Central South

Haweswater Aqueduct Resilience Programme

HWY-S02 Woodgate Hill

Detailed Design

Rochdale Old Rd - Castle Hill Junction

Site Clearance

Status
S3 - Suitable for review and comment

Document No.
80061155-ARP-HAHWH-NA-DR-H-00005

Rev
P02

Scale at A1: 1:250

Authorised By: SR

Checked By: CW

Approved By: AG

Approved Date: 05/06/26

