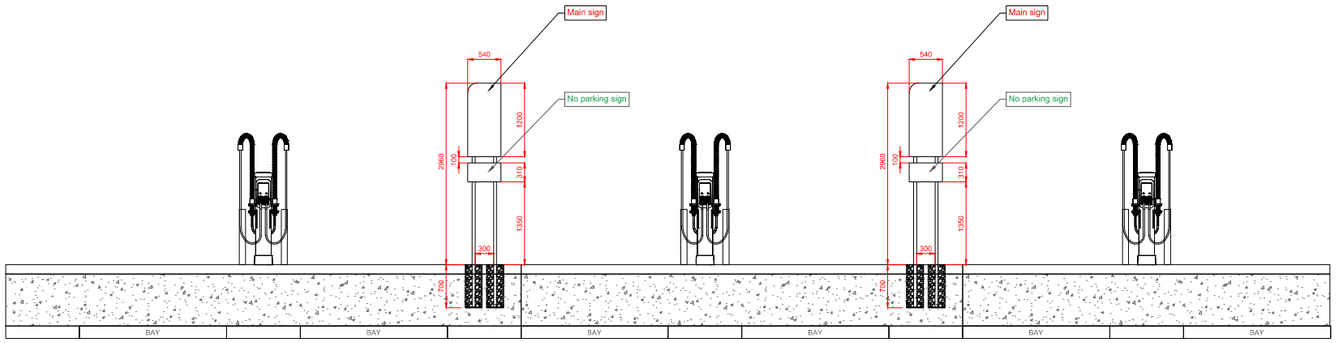

Front View (1:100)

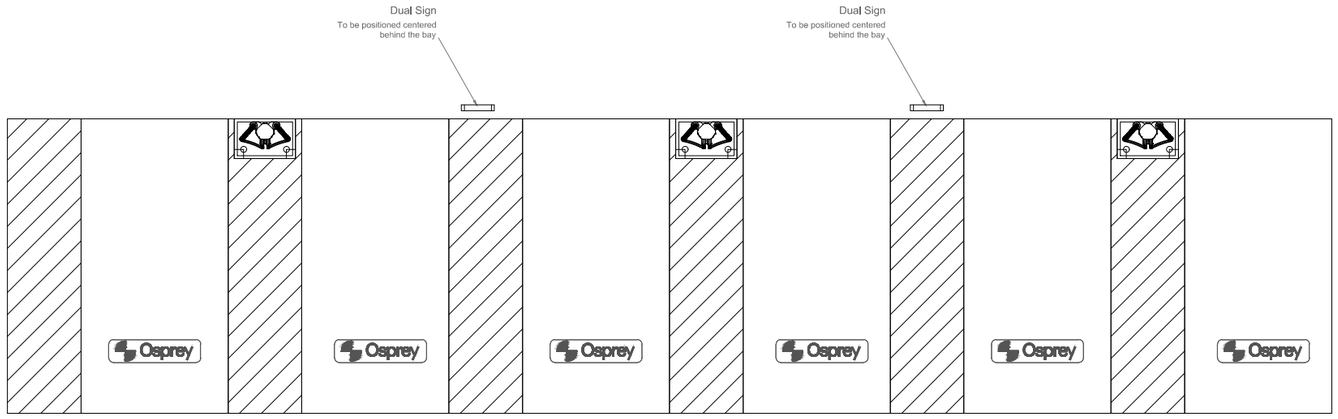

Top View (1:100)

Notes:

FOR GUIDANCE ONLY

Specification of works

Scope
- Installation of 4 sign posts (blue) into lean concrete mix
- installation of signage onto posts

Osprey to provide/supply
- Signposts, mounting hardware, caps (see parts list)

Part	Specification	Quantity
Tall Signpost	3.5m, blue coated signpost + base + caps	4
Osprey Charging main sign	large cut-corner main sign	2
no parking sign	no parking sign (to be fitted below main sign)	2

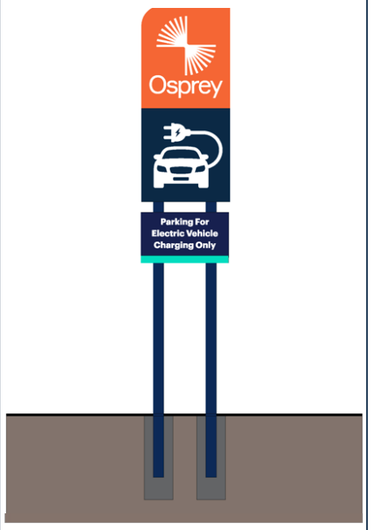

Foundations
- if virgin ground - 700(d) x 250x250mm
- if made-up ground - 700x350x350mm

Osprey Charging Network Ltd
3rd Floor, Martin House, 5 Martin Lane,
London, EC4R 0DP
T: 0800 058 8400
www.ospreycharging.co.uk

TITLE:

6B3CIB Kempower Dual
Signage Plan

SCALE AT A3:
1:100/1:100

© CROWN COPYRIGHT AND DATABASE RIGHTS 2023 - ORDNANCE SURVEY 0100031673

Whilst working on behalf of Osprey, all site staff are required to work safely and any safety incidents must be reported to **james.reason@ospreycharging.co.uk** as soon as possible. Construction works carried out and safety precautions must comply with Construction Design and Management 2015 regulation - In the event of an emergency with an Osprey charge point, or to report a fault, please contact the 24/7 Helpline - **0800 058 8400**

1:100

2m 0 2m 4m 6m 8m 10m