


EXISTING MATERIALS

- NATURAL GREY, TRADITIONAL ROOF SLATE TO AN APPROX 30+° DUS - ROOFED WITH ROOF SLATE
- COURSSED, QUARRIED, NATURAL STONE WALLS APPROX 500 THICK (NON-CURVED), WIDE / SUBSTANTIAL JOINTS TO REGULAR COURSED LOCAL SANDSTONE - FINE TO MEDIUM GRAINED. BUFF - COLORED SANDSTONE BUILT IN REGULAR COURSES USING BROWN DRESSED BRICKS WITH FINE TRUNK OF "ASHURE" TO DOOR SUBFRAMES, STONE SILLS / LINTELS, TRANSOMS AND DOOR LININGS PAINTED BLACK
- TRADITIONAL WHITE PAINTED WOODEN FRONT AND REAR UPON WHITE WINDOWS ON REAR ELEVATION
- BACKUP BRICKWALL GUTTERS - DOWNSPOUTS, SALSSTACKS, SAUTAGE AND WASTES

1:50 EXC "FRONT" ELEVATION

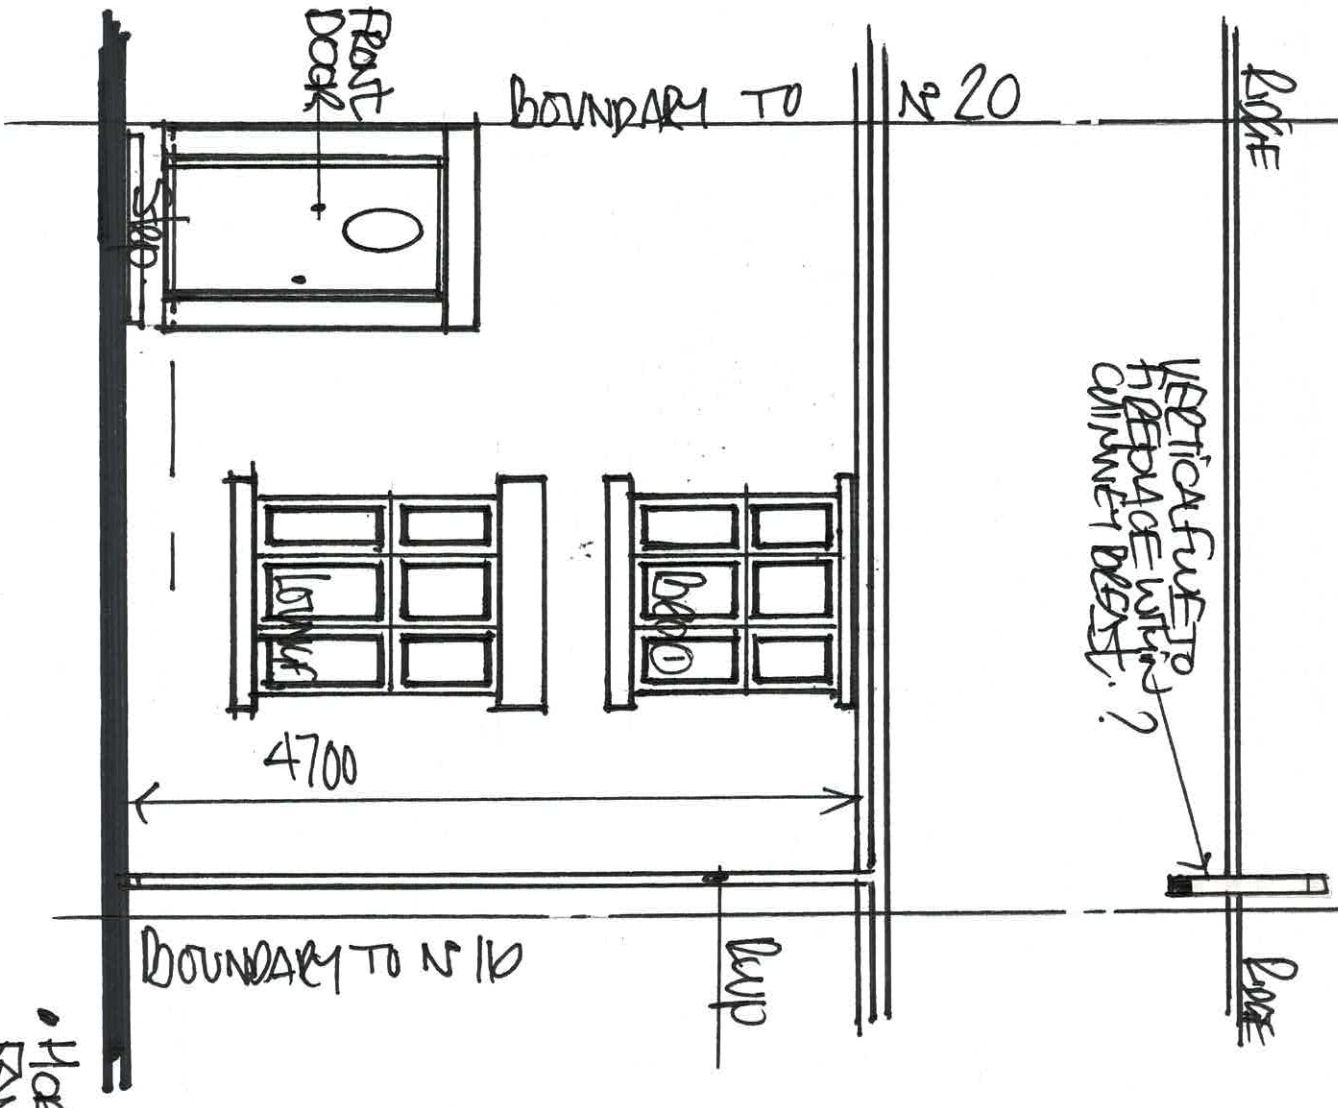

- HORIZONTAL RAIN ASSISTED BAL FURTHER AS AN ROILED MOUNTED ON BACK WALL TO BASEMENT BRACKETS

1:50 EXC "REAR" ELEVATION

