


Notes:

- This drawing is to be read in conjunction with all relevant Architects and Engineers drawings.
- It is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved method statement.

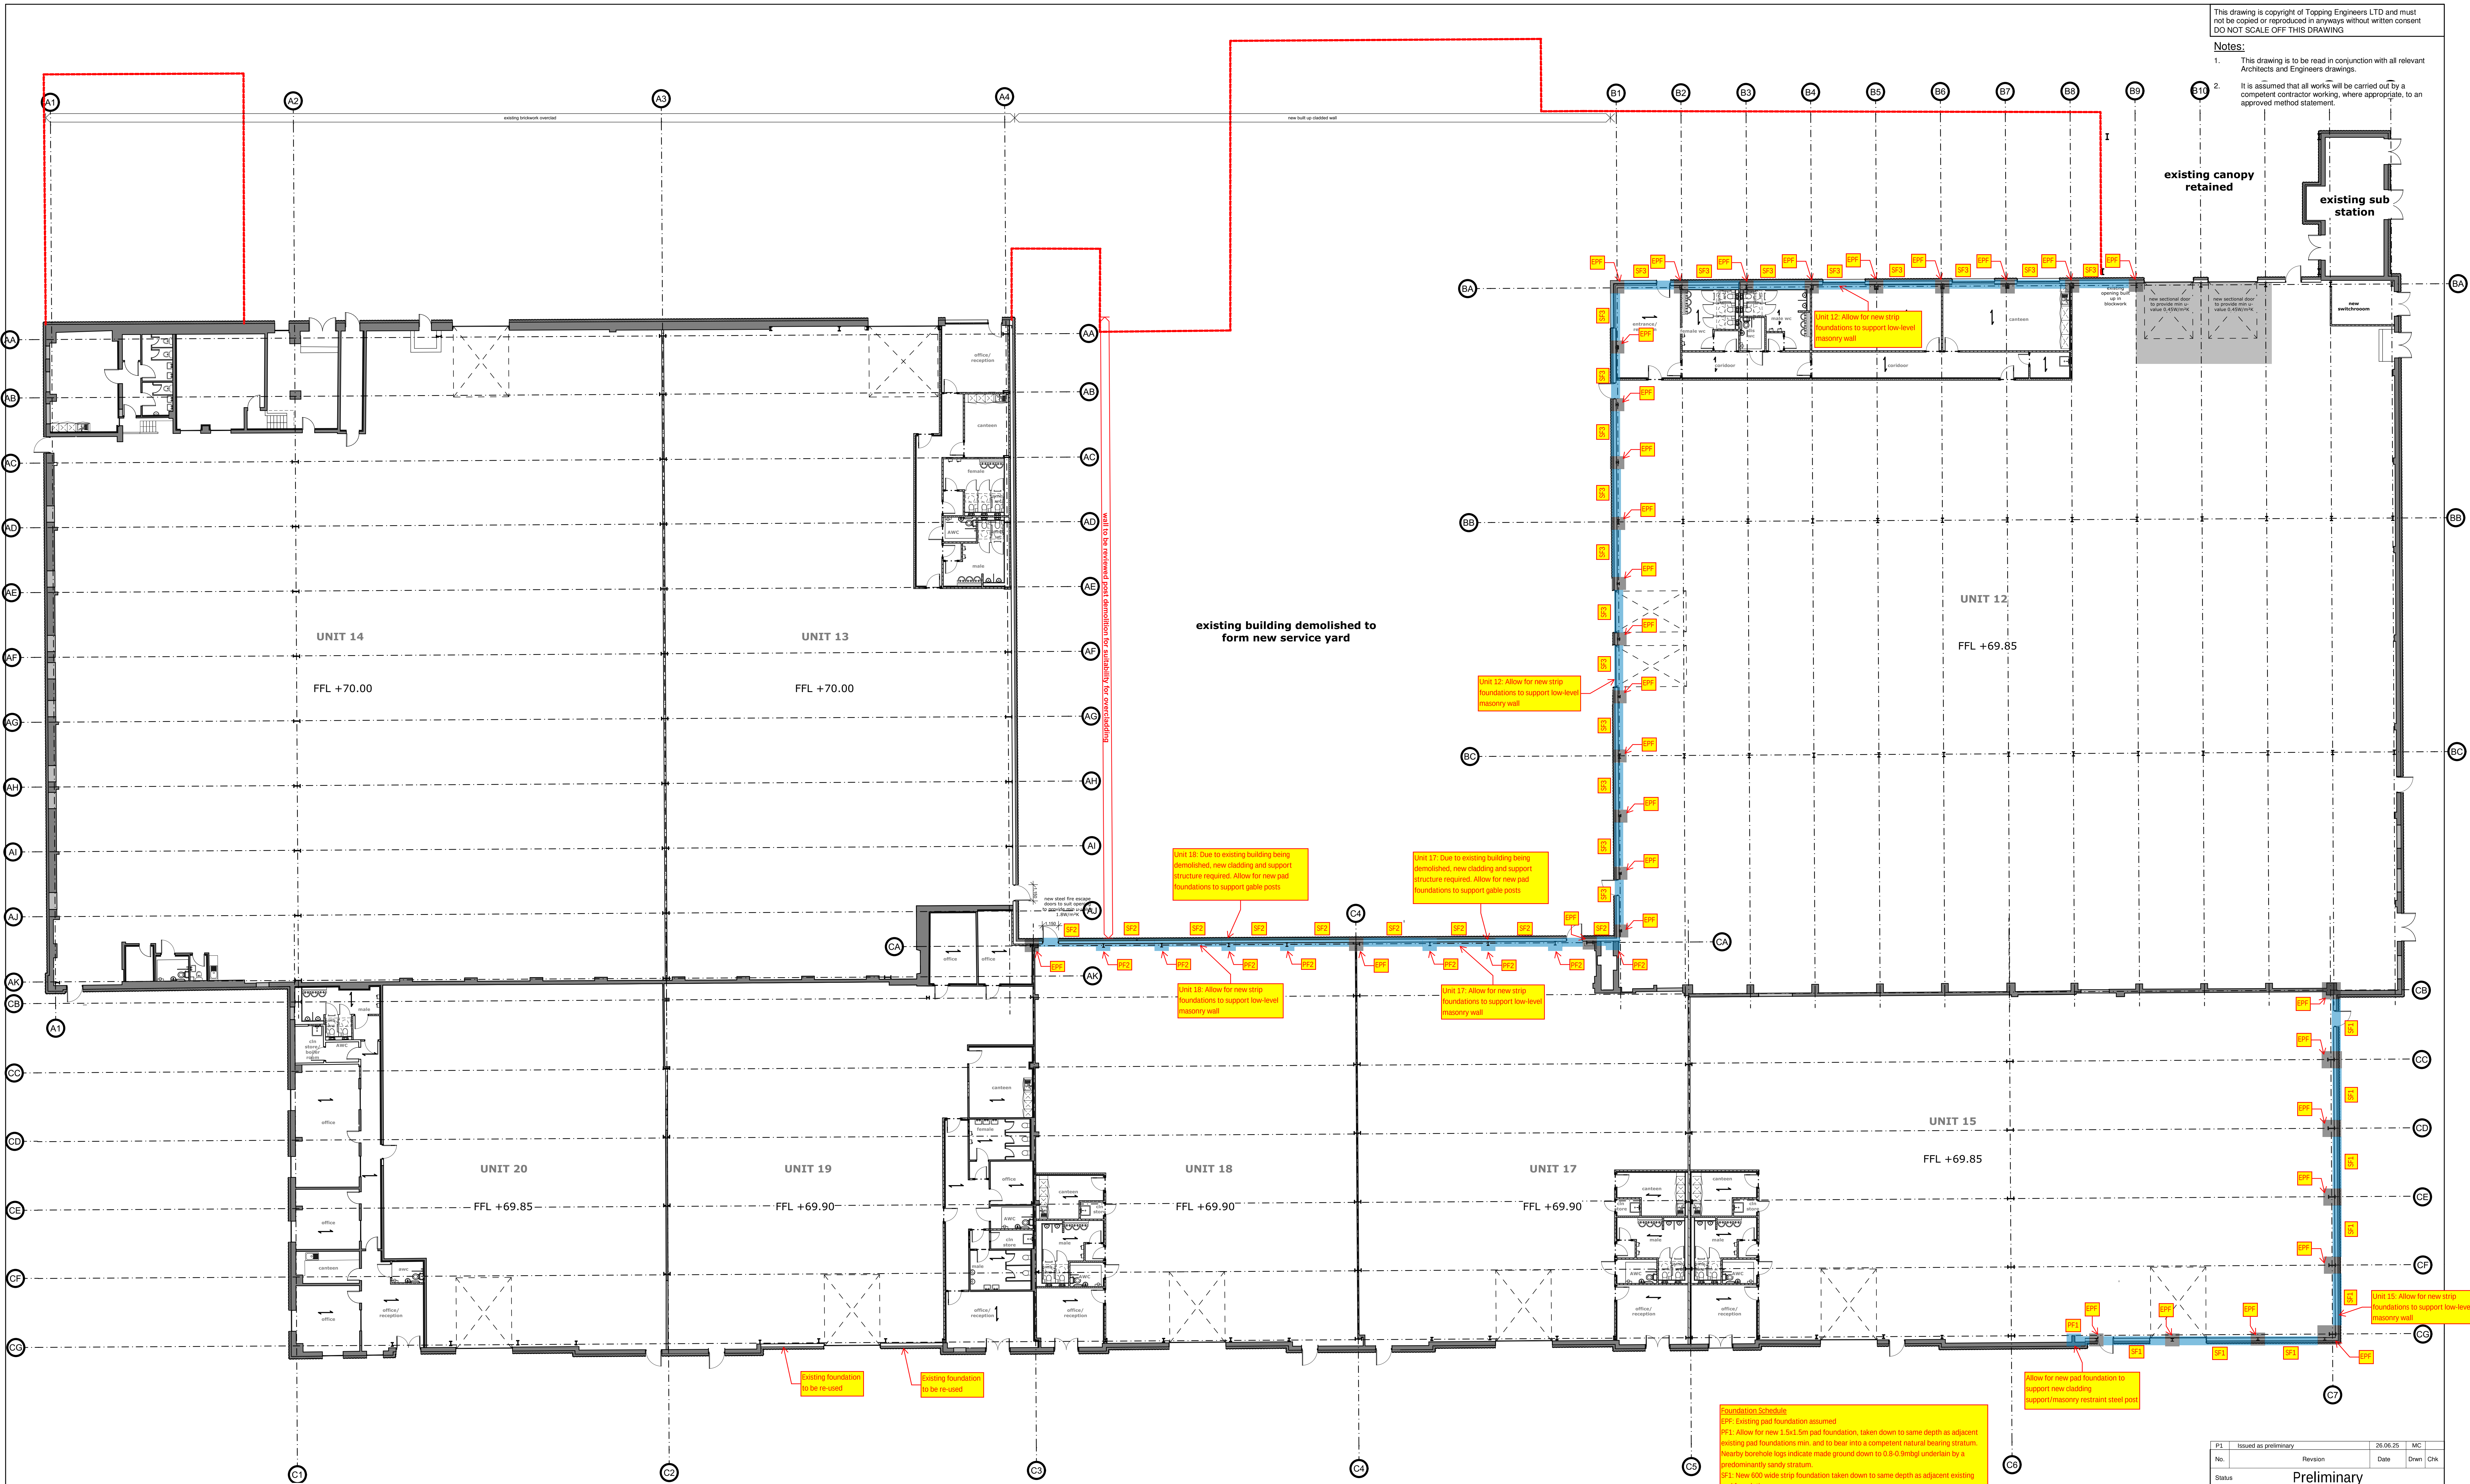

**Foundation Schedule**  
SF1: Existing pad foundation assumed  
SF2: Allow for new 1.5x1.5m pad foundation, taken down to same depth as adjacent existing pad foundations min. and to bear into a competent natural bearing stratum. Nearby borehole logs indicate made ground down to 0.8-0.9mbgl underlain by a predominantly sandy stratum.  
SF3: New 600 wide strip foundation taken down to same depth as adjacent existing pad foundations.  
SF4: Allow for new 1.5x1.5m pad foundation, taken down to a depth of a competent natural bearing stratum. Nearby borehole logs indicate made ground down to 0.5-0.6mbgl underlain by a mixture of sands and gravels.  
SF5: New 600 wide strip foundation taken down to same depth as adjacent existing/new pad foundations.  
SF6: New 600 wide strip foundation taken down to same depth as adjacent existing pad foundations min. and to bear into a competent natural bearing stratum. Nearby borehole logs indicate made ground down to 0.5-0.6mbgl underlain by a mixture of sands and gravels.

**Notes**  
This markup has been provided to assist with the planning condition related to new foundations and is not intended to be used for construction. The proposed foundation arrangements shown indicate the overall design intent for new foundations based on current information known. Refer to the Architect's drawings for further information.  
Contractor is to refer to the Outline Phase 1 and Phase 2 Geo-Environmental Investigation Report by IGE Consulting for information on contamination identified to the site, and to ensure that all foundation works are undertaken to approved RAMS.

|        |                       |          |         |
|--------|-----------------------|----------|---------|
| P1     | Issued as preliminary | 26.06.25 | MC      |
| No.    | Revision              | Date     | Dwn Chk |
| Status | Preliminary           |          |         |



|               |                                          |          |    |
|---------------|------------------------------------------|----------|----|
| Client        | GFIC Investments                         |          |    |
| Project       | Warth Industrial Estate<br>Bury, BL9 9TB |          |    |
| Drawing title | Foundation Intent<br>General Arrangement |          |    |
| Sheet Size    | Drawing No.                              | Revision | P1 |
| A0            | 24124-DR-S-0200                          |          |    |