


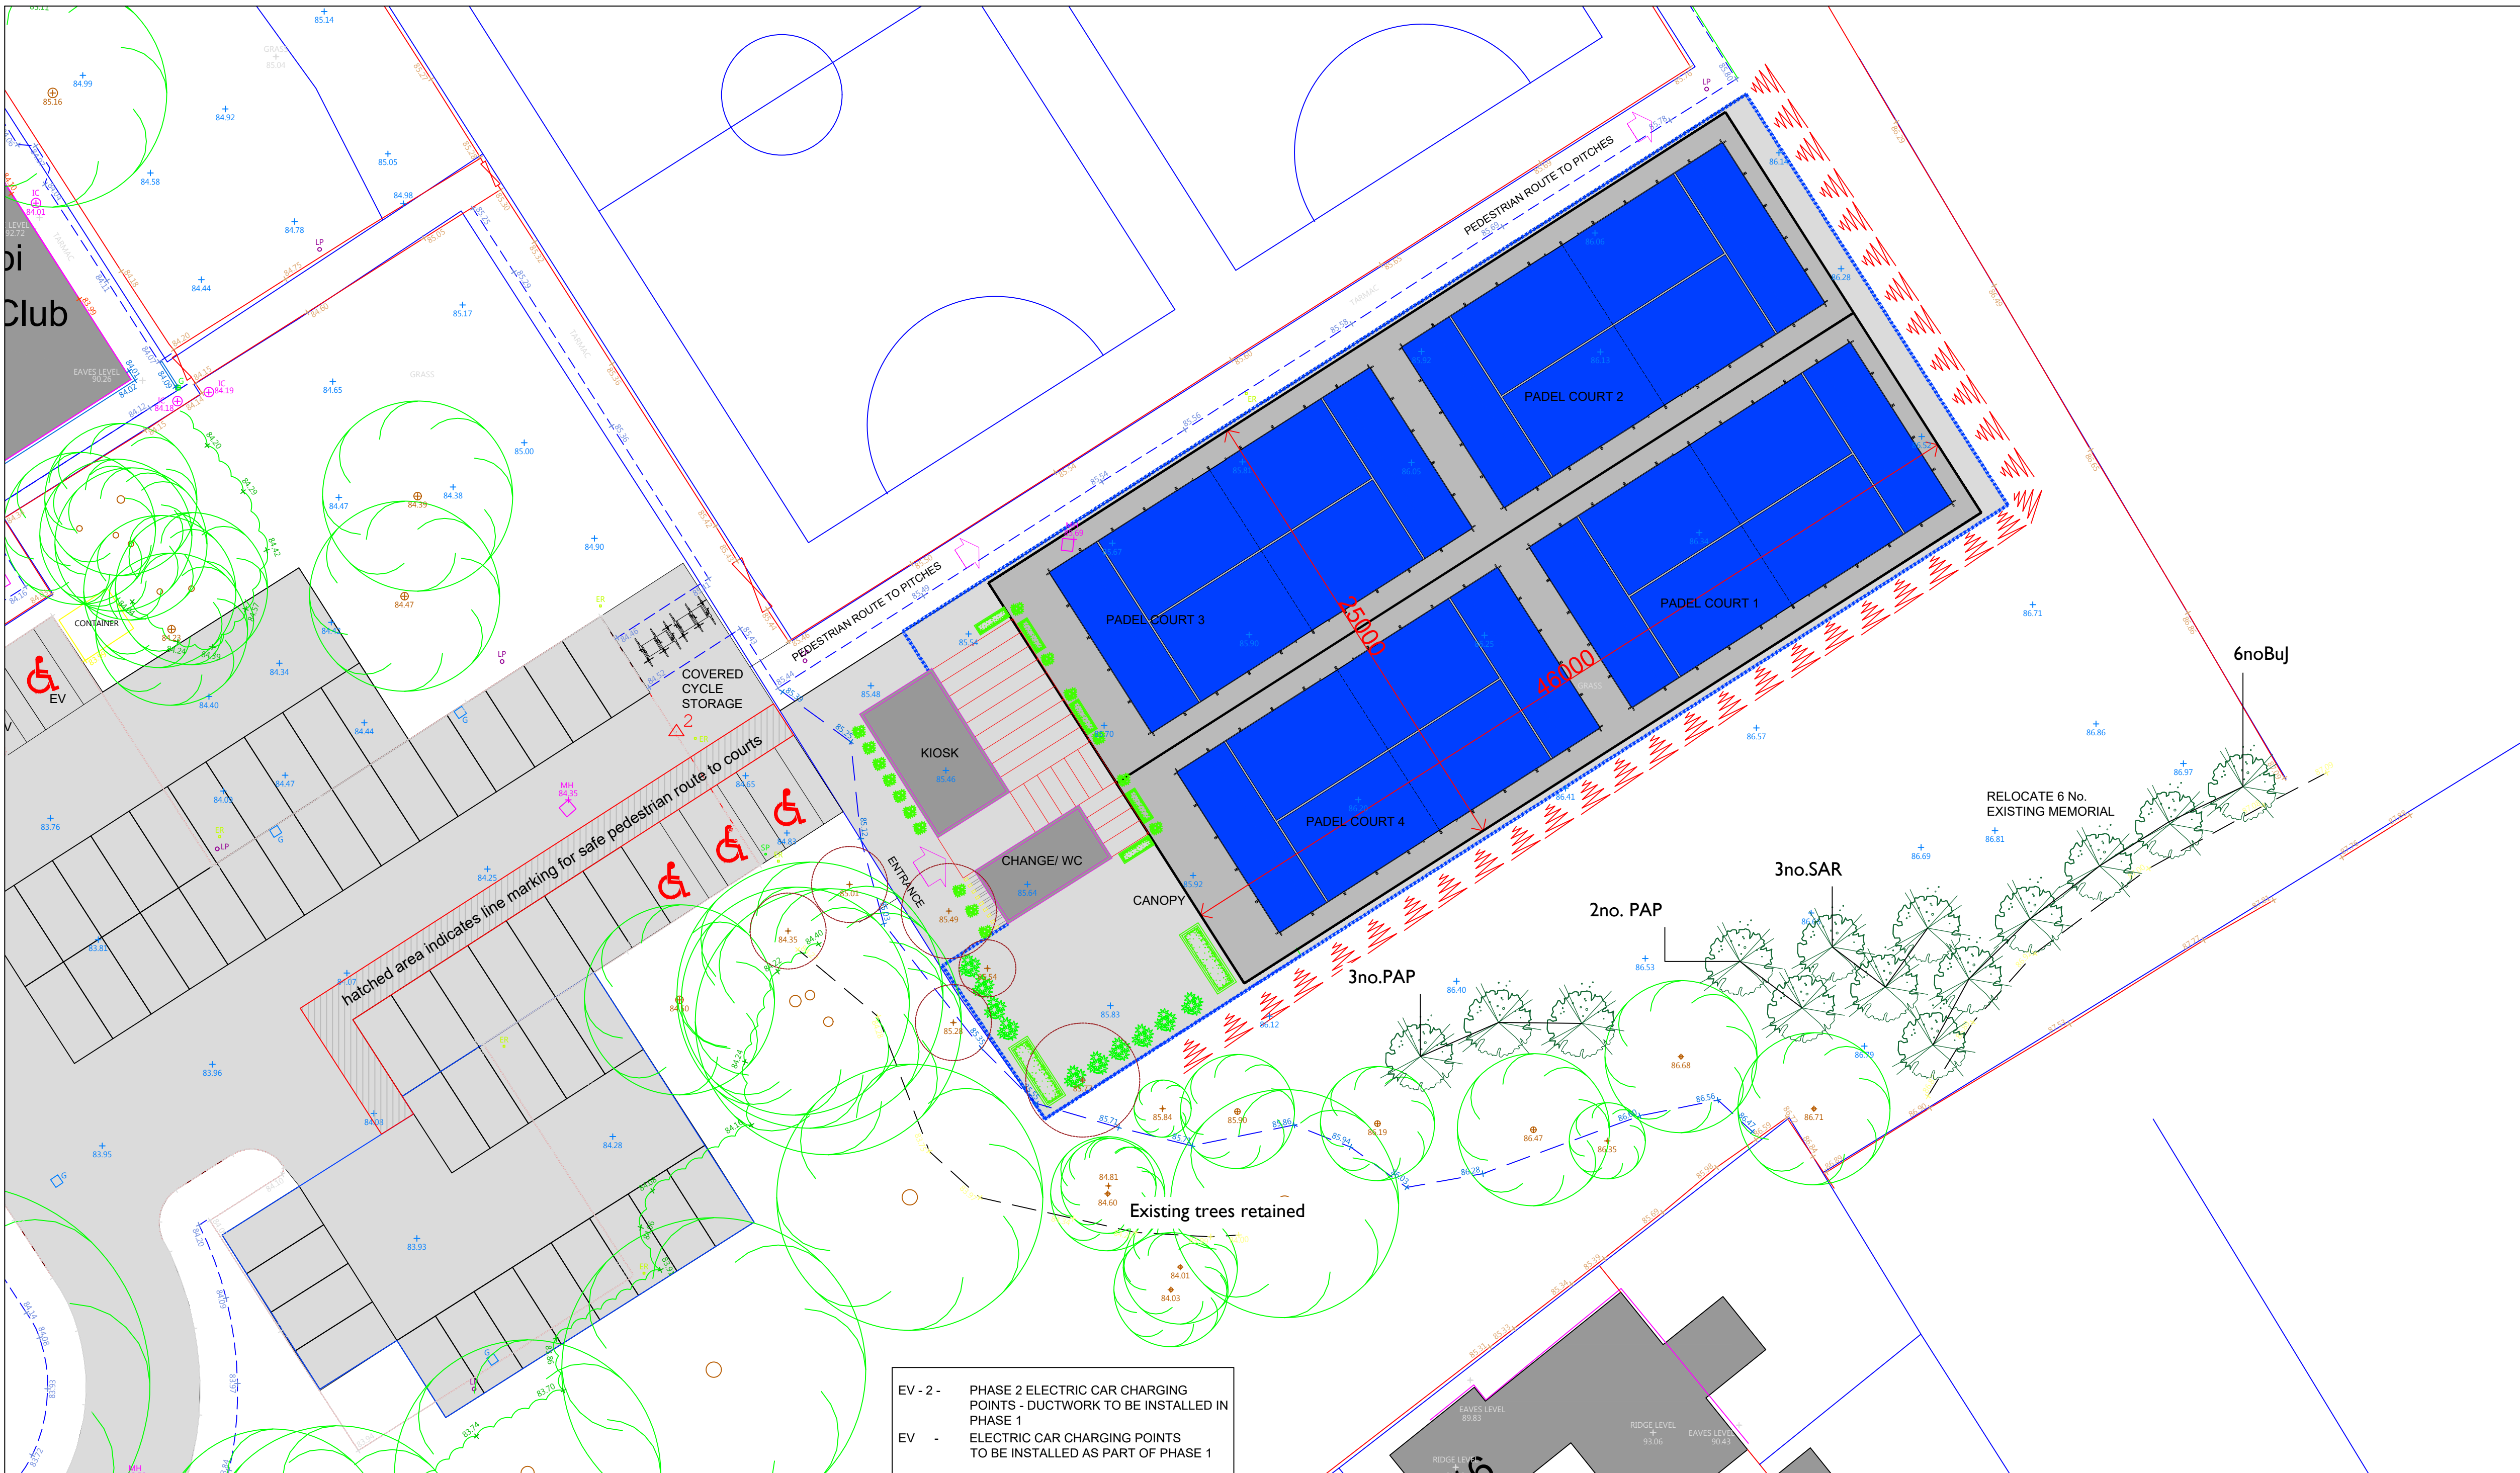

PLANTING NOTES:

1. Plant handling at the nursery, and during transit up to delivery, shall be in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, Berks RG7 5H) which refers to the receipt, unloading and temporary storage of plants.
2. Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').
3. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces).'
4. Topsoil should be spread to min depth of 450mm for all shrub beds and 150mm depth to areas of grass. Topsoil should be of a good quality free from rubble and contaminants and should be certified to current BS3882 as a standard. If further builds are required under soft landscaped areas then subsoil to BS8601:2013 should be used underneath the topsoil as described above.

The topsoil should not be contaminated with subsoil, rubbish, rubble or any other materials that may be detrimental to plant growth. When storing the topsoil, compaction and contamination should be prevented by covering and not allowing construction plants to pass over it. It should also be handled in the driest conditions possible and not after a heavy rainfall. When spreading the topsoil do not firm, consolidate or compact it. Tip and grade to approximate levels in one operation with minimum of trafficking by plant. Once spread all soft landscaped areas need to be cultivated to a depth of 150-200mm to break up any clods of earth and to remove any weeds prior to planting, seeding or laying turf.
5. Tree Planting: One number 80 litre bag of compost (non-peat based) should be roughly incorporated between two tree pits and a slow release tree fertiliser (in line with manufacturers recommendations) should also be incorporated into the mix. The compost and fertiliser must be thoroughly mixed with the excavated material prior to back filling the tree pit, any large stones and rubble should be removed if excavated during these works and the base of the pit should be broken out to ensure that it is free draining. As a guide, trees should be planted in tree pits of the following minimum sizes:

i)	10-12cm Girth	750 x 750 x 650mm deep
ii)	12-14cm Girth	750 x 750 x 650mm deep

The topsoil should not be contaminated with subsoil, rubbish, rubble or any other materials that may be detrimental to plant growth. When storing the topsoil, compaction and contamination should be prevented by covering and not allowing construction plants to pass over it. It should also be handled in the driest conditions possible and not after a heavy rainfall. When spreading the topsoil do not firm, consolidate or compact it. Tip and grade to approximate levels in one operation with minimum of trafficking by plant. Once spread all soft landscaped areas need to be cultivated to a depth of 150-200mm to break up any clods of earth and to remove any weeds prior to planting, seeding or laying turf.

5. Tree Planting: One number 80 litre bag of compost (non-peat based) should be roughly incorporated between two tree pits and a slow release tree fertiliser (in line with manufacturers recommendations) should also be incorporated into the mix. The compost and fertiliser must be thoroughly mixed with the excavated material prior to back filling the tree pit, any large stones and rubble should be removed if excavated during these works and the base of the pit should be broken out to ensure that it is free draining. As a guide, trees should be planted in tree pits of the following minimum sizes:

i) 10-12cm Girth	750 x 750 x 650mm deep
ii) 12-14cm Girth	750 x 750 x 650mm deep
6. Tree Staking: Each tree should be individually secured inline with the following recommendations.

i) 10-12cm girth Selected Standards - Single stake using 10cm diameter short stakes at 600mm above ground level, with a crossbar and 1no. rubber tree tie to secure the tree in position.
ii) 12-14cm Heavy Standards - Single stake using 10cm diameter short stakes at 600mm above ground level, with a crossbar and 1no. rubber tree tie to secure the tree in position.

7. The contractor **MUST** ascertain for himself/herself the exact location of underground services and maintenance points prior to any excavations on site.

8. All areas of planting are to be mulched to a depth of 50mm with a medium grade tree bark mulch.

9. Water all plants and trees on the same day of installation. Ensure that the site is left in a clean and tidy state with any soil, mulch or detritus material swept off the paths and patio areas. Wash down surfaces as required.

9. Water all plants and trees on the same day of installation. Ensure that the site is left in a clean and tidy state with any soil, mulch or detritus material swept off the paths and patio areas. Wash down surfaces as required.

9. Water all plants and trees on the same day of installation. Ensure that the site is left in a clean and tidy state with any soil, mulch or detritus material swept off the paths and patio areas. Wash down surfaces as required.

9. Water all plants and trees on the same day of installation. Ensure that the site is left in a clean and tidy state with any soil, mulch or detritus material swept off the paths and patio areas. Wash down surfaces as required.

PLANT SCHEDULE

Trees						
Abb.	Species	Girth (cm)	Height(cm)	Type	Number	
PAP	Prunus Avium 'Plena'	12-14cm	350-400	Heavy Standard	5	
BUJ	Betula utilis 'Jaquemontii'	12-14cm	350-400	Heavy Standard	6	
SAR	Sorbus acuparia	12-14cm	350-400	Heavy Standard	3	
					14	

KEY

Soft Landscaping



Proposed Trees -To include a mixture of native trees and wildlife beneficial trees.



DEP LANDSCAPE ARCHITECTURE LTD

**2 COMMERCIAL STREET
MANCHESTER, M15 4RQ
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk**

Client

Pure Padel

Project

Maccabi Sports Club

Description

Tree Replacement Plan

Status

Planning

Scale

Drawn

1:200@A1

CP

job number

Drawing number

5562

01

Aug 24

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement; Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.