


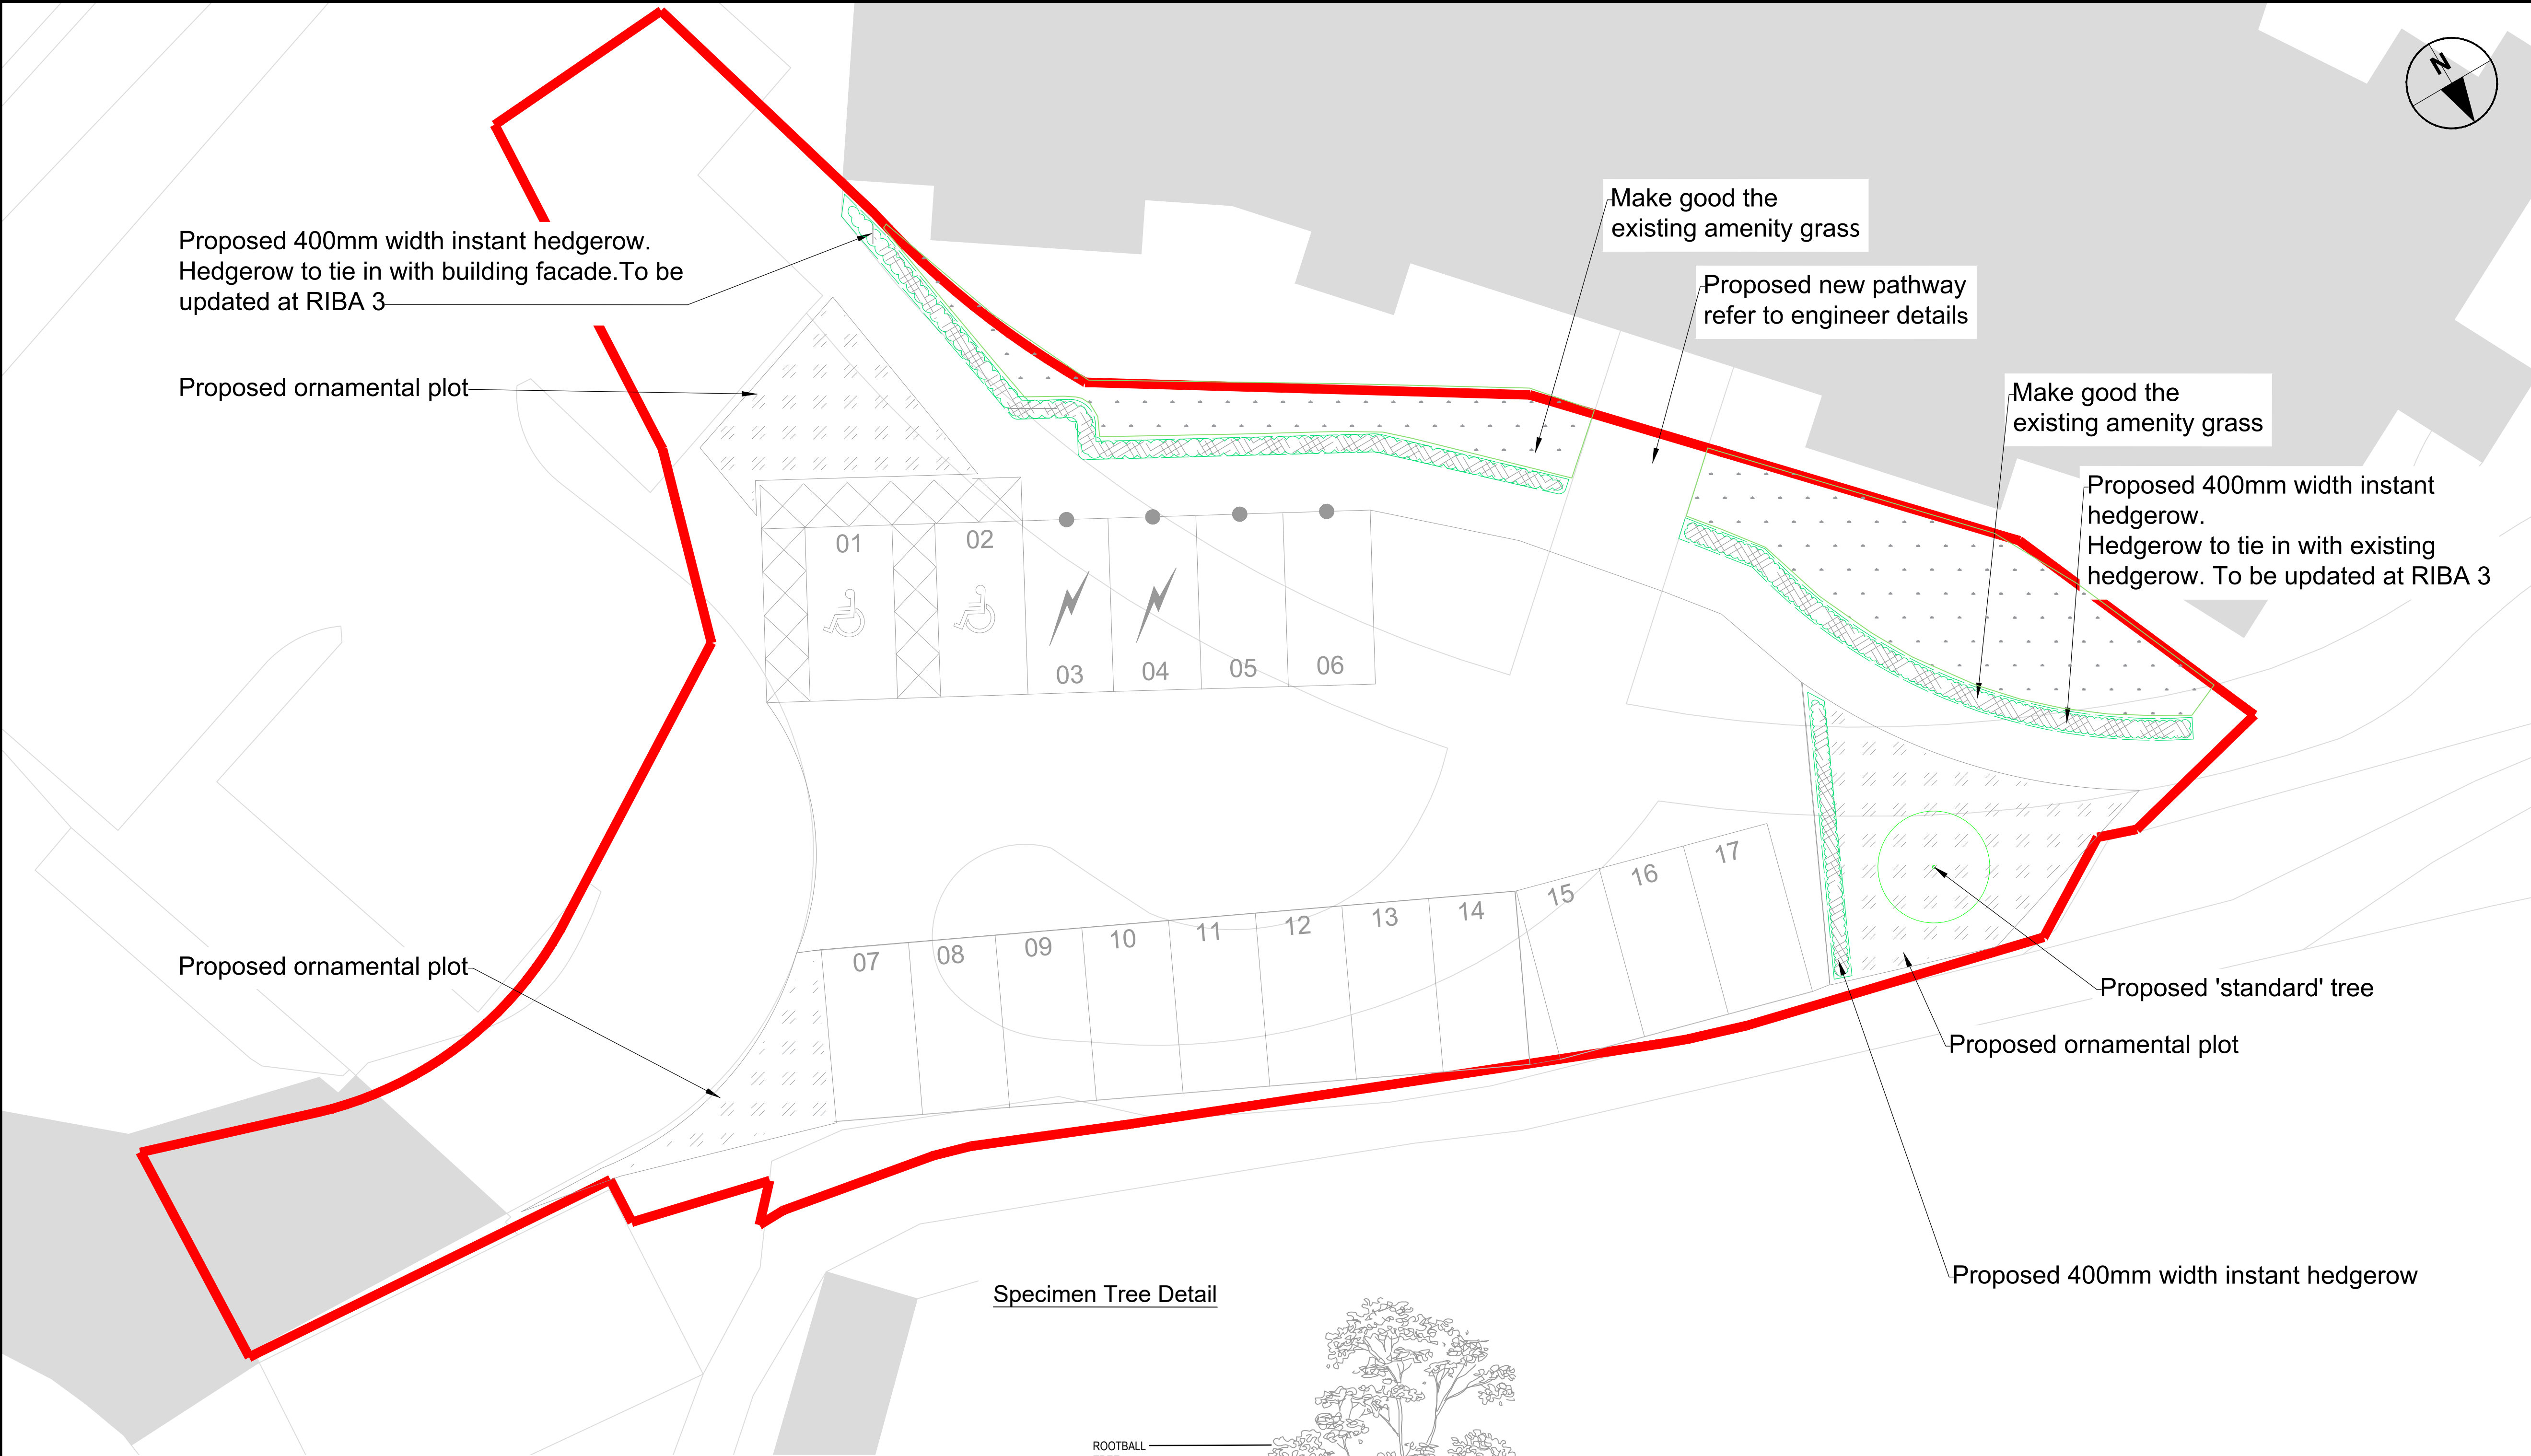



Indicative Planting Schedules

Ornamental plots		
Species	Pot Size	Specification
Lavandula 'Sawyers'	2L	Bushy: C
Hebe albicans	2L	Bushy: C
Achillea 'Coronation Gold'	2L	Full pot: C
Anemone blanda 'Ingramii'	2L	Full pot: C
Crocus speciosus, Fritillaria meleagris, Galanthus nivalis, Narcissus 'Thalia'	Bulb Mix	-
Miscanthus sinensis 'Morning Light'	2L	Full pot: C-

Instant Hedge				
Species	Length	Width	Height	Form
Fagus sylvatica	100 cm	40 cm	150-170cm	Trough hedging

Tree Schedule							
Species	Form	Age	Girth	Height	Root	Clear Stem	Breaks
Acer Rubrum 'October Glory'	Standard	2x	8-10 cm	300-350 cm	RB	Min 200 cm	5 breaks

Specimen Tree Detail

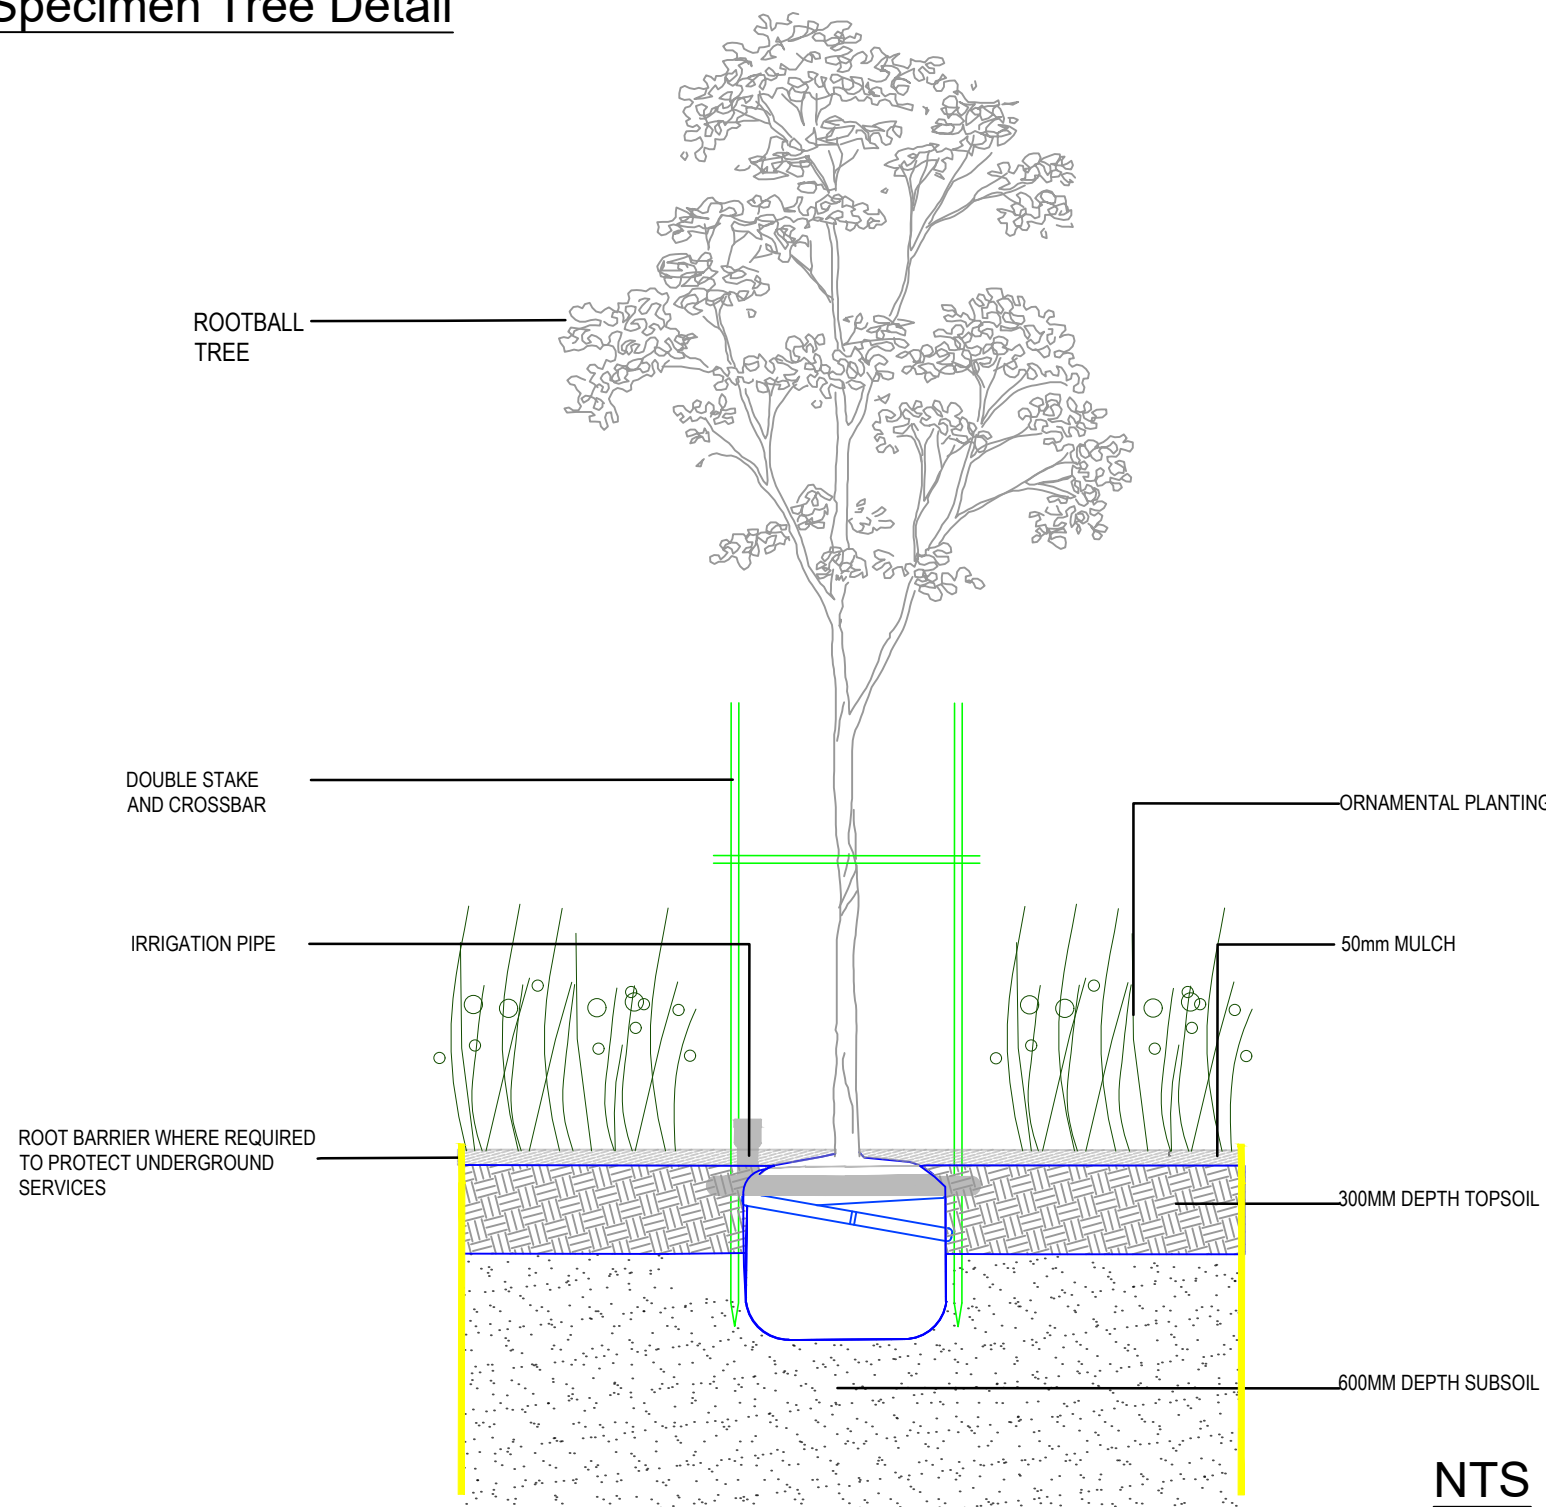

AECOM

PROJECT

BURY HOSPICE CARPARK UPGRADE

CLIENT

BURY HOSPICE

CONSULTANT

AECOM Limited
100 Embankment
Cathedral Approach
United Kingdom, M3 7FB
T: +44-20-7061-7000
www.aecom.com

NOTES

- ALL DIMENSIONS ARE IN METRES AND ALL LEVELS IN METRES ABOVE ORDNANCE DATUM UNLESS NOTED OTHERWISE.
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER SCHEME DRAWINGS AND DOCUMENTS.
- THIS DRAWING IS TO BE USED FOR THE STATED PURPOSE OF ISSUE ONLY AND MUST NOT BE USED FOR ANY OTHER PURPOSE THAN THAT INDICATED.
- ONLY WRITTEN DIMENSIONS SHALL BE USED. CRITICAL DIMENSIONS AND LEVELS SHALL BE VERIFIED ON SITE BY THE CONTRACTOR PRIOR TO WORK COMMENCEMENT.
- ANY DISCREPANCIES IN DIMENSIONS OR DETAILS ON OR BETWEEN THESE DRAWINGS SHALL BE DRAWN TO THE ATTENTION OF THE PROJECT MANAGER FOR CLARIFICATION.

KEY

- Red Line Boundary
- Soft Landscape
 - Proposed Ornamental Plot
 - Existing amenity grass to be made good
 - Proposed 400mm width instant hedgerows
 - Proposed Tree
- Street Furniture
 - Proposed Bench

ISSUE/REVISION

POI	19-07-2023	PLANNING ISSUE	CZ	AM	SD
I/R	DATE	DESCRIPTION	BY	CK	AP

SUITABILITY

S2 - Suitable for information

PROJECT NUMBER

08240054

SHEET TITLE

BURY HOSPICE
LANDSCAPE GA

SHEET NUMBER

08240054-ACM-XXX-XX-DR-LA-00001

SCALE

1:200 @ A1

REVISION

P01

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.