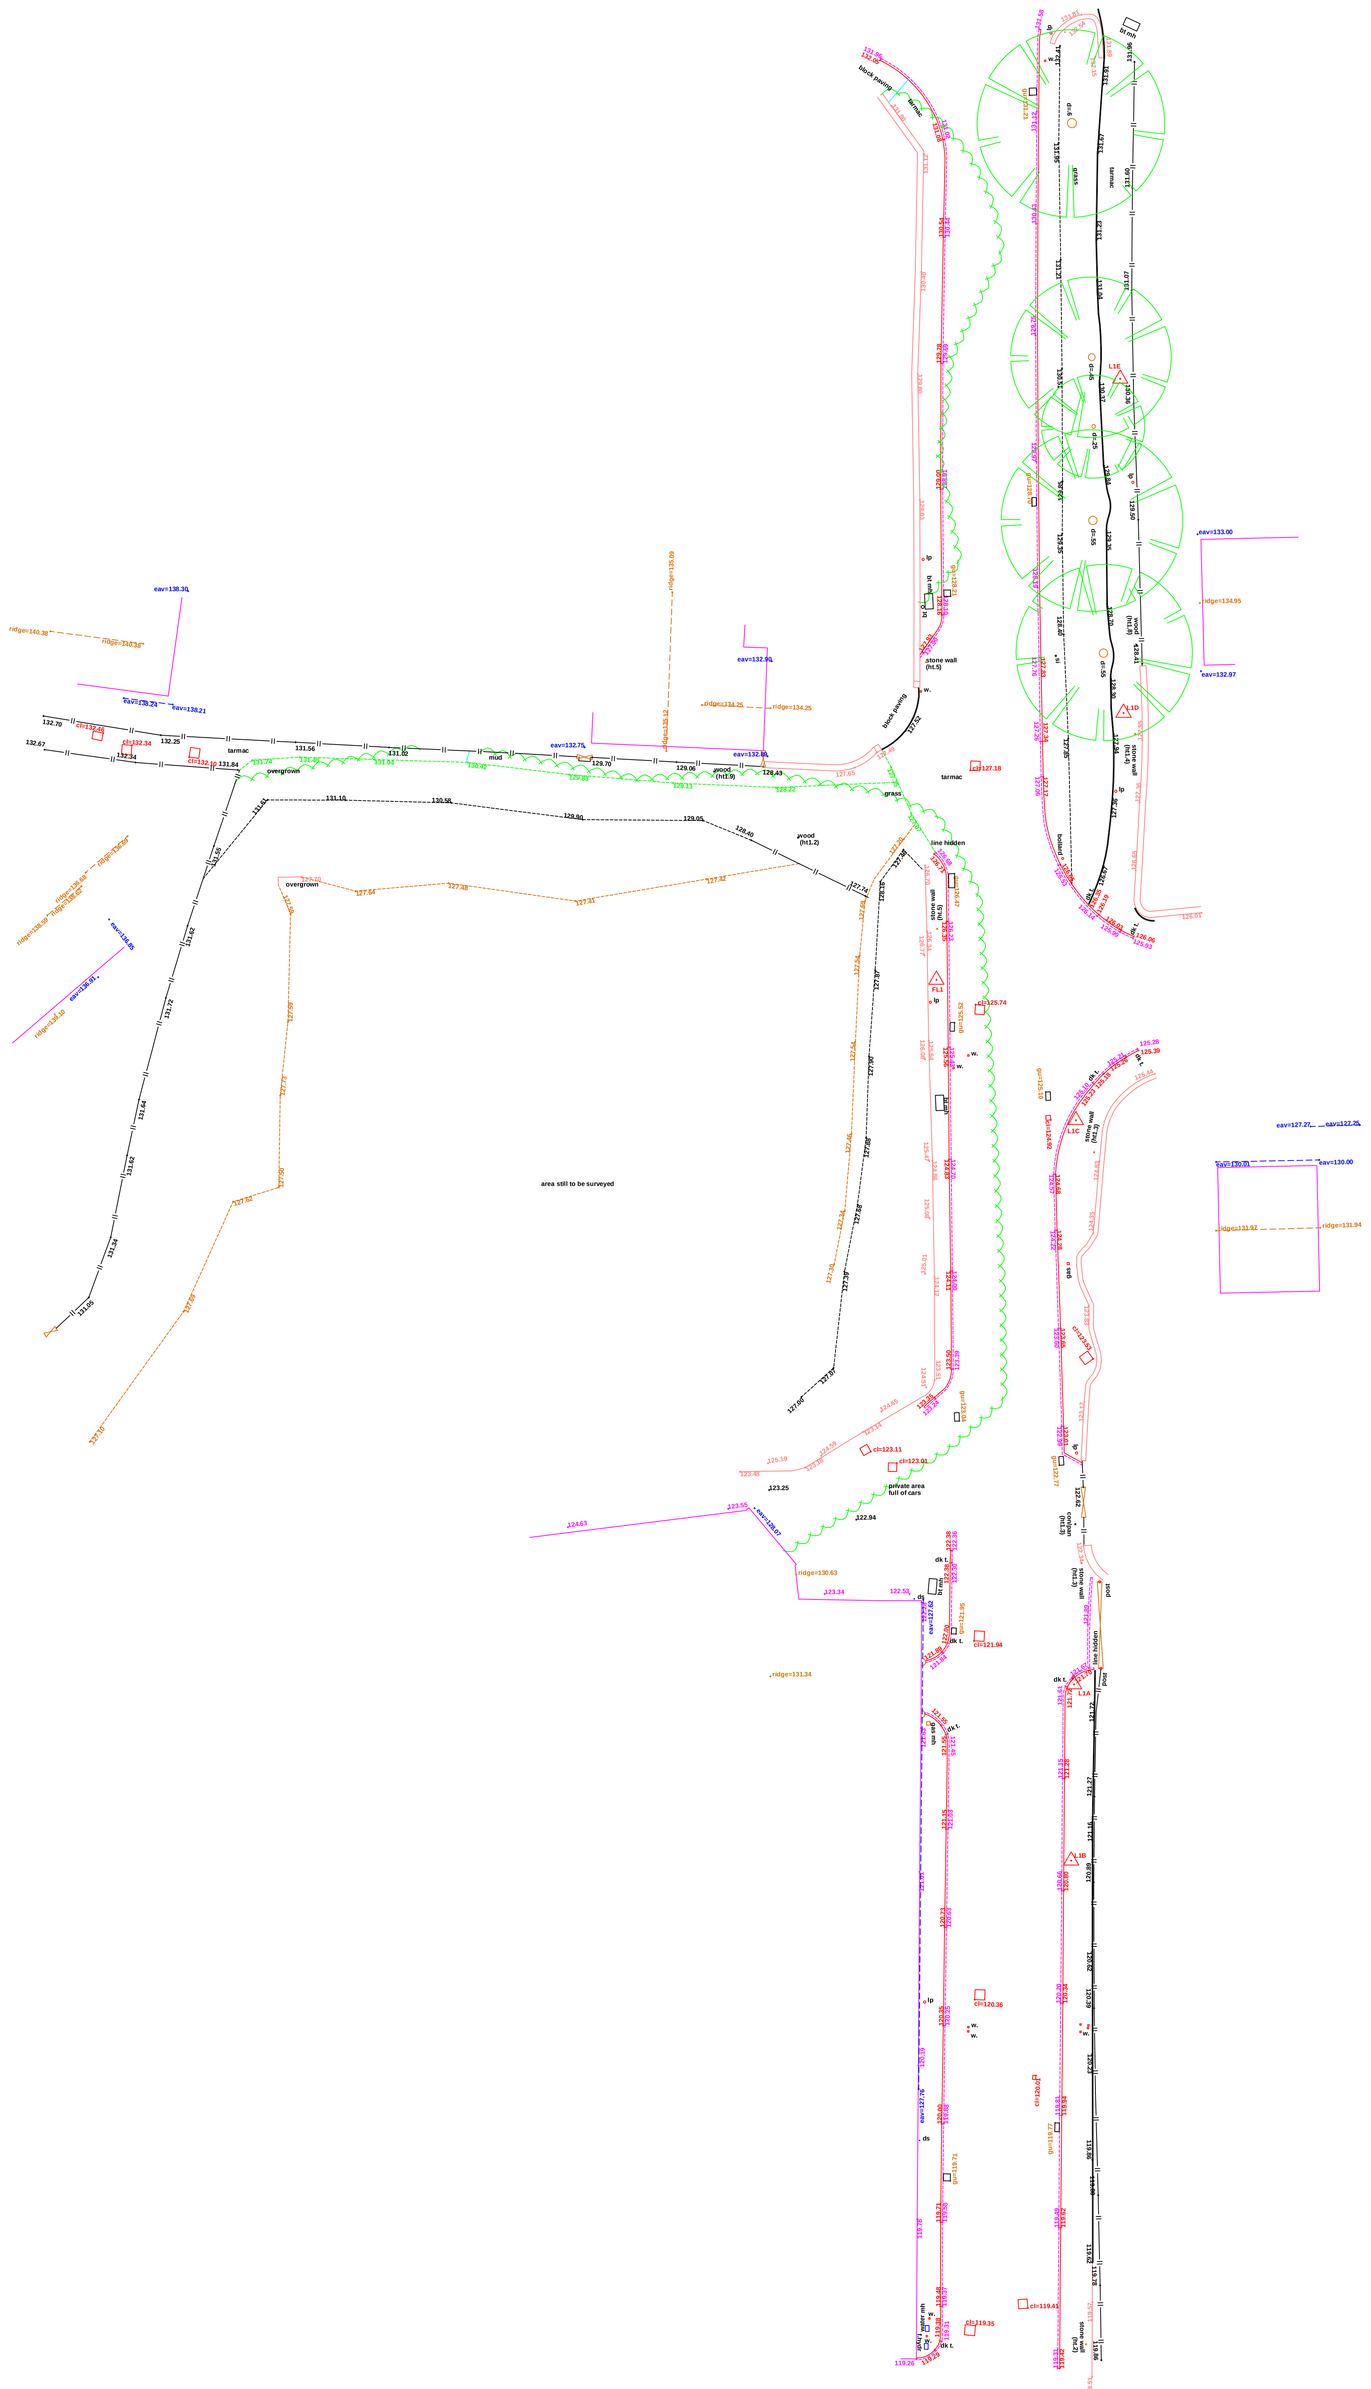


deciduous tree

defined by one point at centre & one point on spread

d=.5

trunk radius as drawn

(girth size and position +/- 50mm)

conifer tree (defined as above)

station

trial pit

gate

bush

borehole

window sample

- note heights / points / lines all same colour
- e.g. for channel, all crosses / lines / heights are magenta

56.24

spot level

bottom of batter / wood / ridge / timber face / gutter

top of batter

break line / discontinuity

wall (see text nearby for height / width / type)

retaining wall (see text nearby for height / width / type)

channel (all levels at channel unless noted)

kerb levels (shown parallel to channel -)

railway

drain / river / canal

overhead lines / buildings (not surveyed unless specified)

concrete / ramp

building / stone

face of cladding / flower bed

canopy

verge

fence (see text nearby for height / width / type)

(panel / security / etc.)

columns / gridlines / conveyors / column face

brick

cycle lane / bus lane / white line (see text)

tanks / decking

hedge scaled to width

line may be as above, if just one edge
i.e. for level specific surveys both sides
measured not to show level change
(see text for type / height / width / etc)

path / window / door

track

143
142.5

contours

pipe line

can't lift - can't lift
d=65.23
ll=59.78

M

- only manholes found on site during survey marked
- other manholes may be present but covered
- all invert levels taken where possible at main channel
- all surveys to our specification based on RICS (see website)
- some surveying done with GPS - please contact us regarding accuracy

bt cable

electric cable


gas

tarmac

footpath

?	unknown cover	
ac box	air conditioning box	STANDARD FENCE ABBREVIATIONS
av	air valve	b/w - barbed wire
bb	bellaha beacon	c/l - chain link
bin	bin	c/b - close boarded
bt	bt line	c/i - corrugated iron
bt	bt manhole	con/pan - concrete panel
bt	bt post	cr/ba - crash barrier
bt box	bt box	h/r - hand rail
bm	OSBM	i/r - iron rail
block	blocked manhole	pal - pallasde
bus shelter	bus shelter	panel - panel
cable	cable	p/b - public barrier
can't lift	can't lift	pick - picket
ctr box	cable tr box	p/r - post & rail
ctr	cable tr manhole	p/w - post & wire
data mh	data manhole	sec. - security fence
dk	drop kerb	wood - wooden fence
dsdg	down spout (with gulley)	
dsr	recessed downspout	STANDARD ABBREVIATIONS
ds	building step back not surveyed	conc. - concrete
el. post	electric post	conc. bolt. - concrete bollard
el.	electric	conc. wal - concrete wall
el. mh	electric manhole	edg.cut grass - edge cut grass
el box	electric box	el.sub st. - elec. substation
earth	earth strap/spike	face conc. - face of concrete
f.hydr	fire hydrant	face clad. - face of cladding
gas	gas	face tim. - face of timber
gas mh	gas main hole	trel - trella
gas box	gas box	hi pr. gas - high pressure gas
gully	gulley top	no ri. turn - no right turn
guy	guy rope/stay	rough ground - rough ground
h.d.	pipe diameter	ret. wall - retaining wall
light	light	sur. drain - surface drain
lp	lamp post	ped. studs - pedestrian studs
lt	left turn arrow	
peg	peg	cl=5.32 (manhole cover level)
phone box	phone box	dpc=56.45 (dpc level)
post box	post box	eav=34.29 (eaves level)
pipe	pipe	ffl=34.34 (finished floor level)
planter	planter	gu=34.29 (gulley level)
post	post	gutter=34.29 (gutter level)
rod. eye	guiding eye	hip=34.29 (hip level)
rm	road mj	il=5.34 (invert level)
rt	right turn	oh=5.34 (overhead level)
salt	salt box	ramp=5.34 (ramp level)
security cam	security camera	rid=34.29 (ridge level)
seat	seat	sill l=5.34 (sill level)
si	sign - with indicative text	sill=5.34 (sill level)
slab=3.19	slab (generally conc.)	sill l=5.34 (sill level)
st.tap	stop tap	slab=5.34 (slab level)
str.	straight on	top conc=5.34 (top of concrete)
tbx	tbubba valve	tip=60.87dia.15 (top of pipe)
tactile paving	tactile paving	t.st.=10.36 (top of step)
ts.	traffic signal	twl=56.72 (top of wall)
ts. mh	traffic signal manhole	wat=56.19 (water level)
ts.box	traffic signal box	cfl=5.67 (cellar floor level)
tree	tree	.05level step (level step)
utility	utility (unknown)	windowtop=13.59
utility mh	utility manhole (unknown)	windowbottom=14.41
utility box	utility box (unknown)	
water	water	
water mh	water manhole	
water box	water box	
wo	wash out valve	
tap	tap	
parking meter	parking meter	
cycle rack	cycle rack	
cycle shelter	cycle shelter	

Location Plan
Sheet 1 of 2



Site Surveying Services - A.M.I.C.E.S.
Suite 7
Grindleton Business Centre
Grindleton, Lancs
BB7 4DH
Tel: 01200 438320
Fax: 07092376338
www.sitesurvey.co.uk
Land / Engineering Surveyors

Setting Out & Control Surveys
Topographic/Volumetric Surveys
GPS Specialists using also
GPS Post Process to tie any site to OS without trig point or BM
Construction Line Registered
TSA member

construction line

Client / Location: Comell
Lowercroft Road, Bury

All work to our standard terms & conditions (see website)

N

THE SURVEY ASSOCIATION

Additional Comments:

To local grid based on osim15/osgm15 all work to sss specification, some by gps, contact us regarding details

Drawing Number:	sss-7346		Revision: A
Drawn By:	MR	Checked By:	CKG
Date:	16/02/2017	Scale:	1:200 @ A0