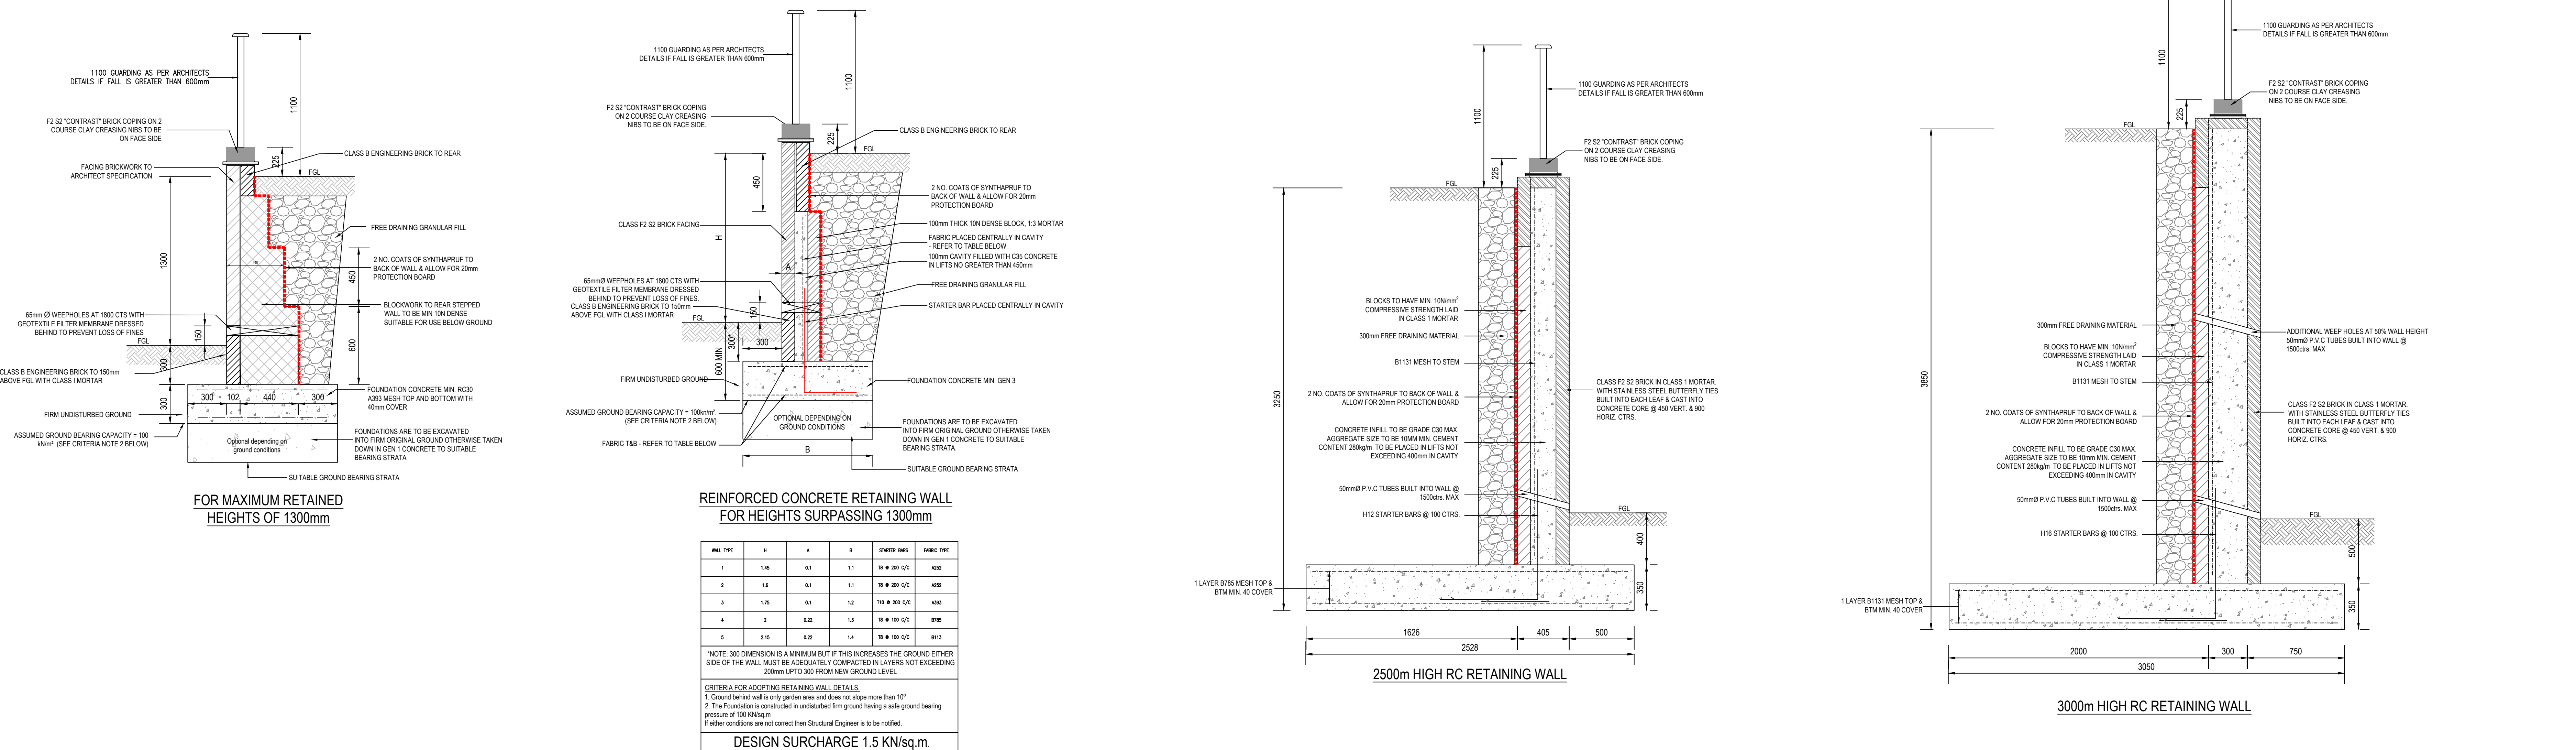
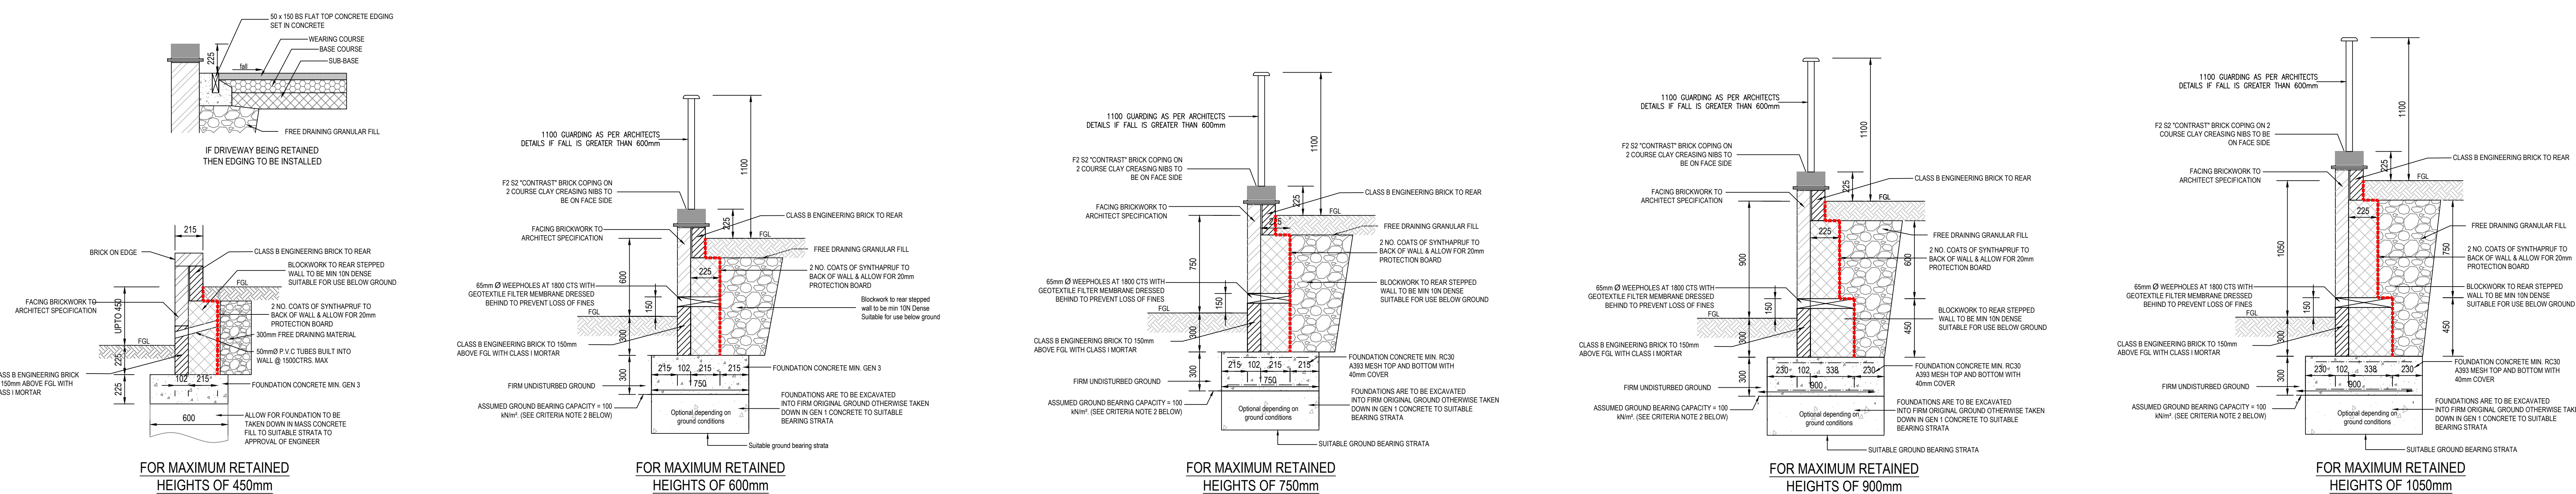


- GENERAL NOTES**
- FOUNDATION CONCRETE TO BE MIN GEN 3 UNLESS NOTED OTHERWISE
 - GRANULAR BACKFILL CAN BE PLACED AFTER 10 DAYS OF COMPLETING WALL
 - MOVEMENT JOINTS (20mm) ARE TO BE POSITIONED AT NO GREATER THAN 10 METER CENTERS IN THE BRICK WALL. SEE NHBG DETAIL 6.1-320.
 - SUB-CONTRACTOR RESPONSIBLE FOR CONSTRUCTION OF WALL AND FOOTINGS AND IS TO TAKE ALL NECESSARY SAFEGUARDS TO ENSURE STABILITY OF GROUND AND STRUCTURES BEHIND WALL DURING THE WORKS AND UP TO THE BACKFILLING OF WALL.
- CRITERIA FOR USE OF RETAINING WALL DETAILS**
- GROUND BEHIND WALL IS ONLY GARDEN AREA AND DOES NOT SLOPE MORE THAN 10°
 - THE FOUNDATION IS CONSTRUCTED IN UNDISTURBED FIRM GROUND HAVING A SAFE GROUND BEARING PRESSURE OF 100 kN/m²
 - IF EITHER CONDITIONS ARE NOT CORRECT THEN STRUCTURAL ENGINEER IS TO BE NOTIFIED.

P01	25.02.2025	PRELIMINARY ISSUE	LS	KOB	KOB
REV	DATE	DESCRIPTION	BY	CHK	APP
DRAWING STATUS:					
PRELIMINARY					
CLIENT: WESTSHIELD					
ARCHITECT: PADDOCK JOHNSON					
PROJECT: STAND GOLF CLUB ASHBOURNE GROVE MANCHESTER					
TITLE: TYPICAL RETAINING WALL DETAILS					
STATUS: S2	PROJECT No: 224-181	PROJECT / ORIGINATOR / VOL/ST/1	LEVEL / TYPE / ROLE	DRAWING No: P01	REV
SCALE: 1:20	DESIGNED: LS	DRAWN: LS	CHECKED: KOB	APPROVED: KOB	DATE: FEB 2025