


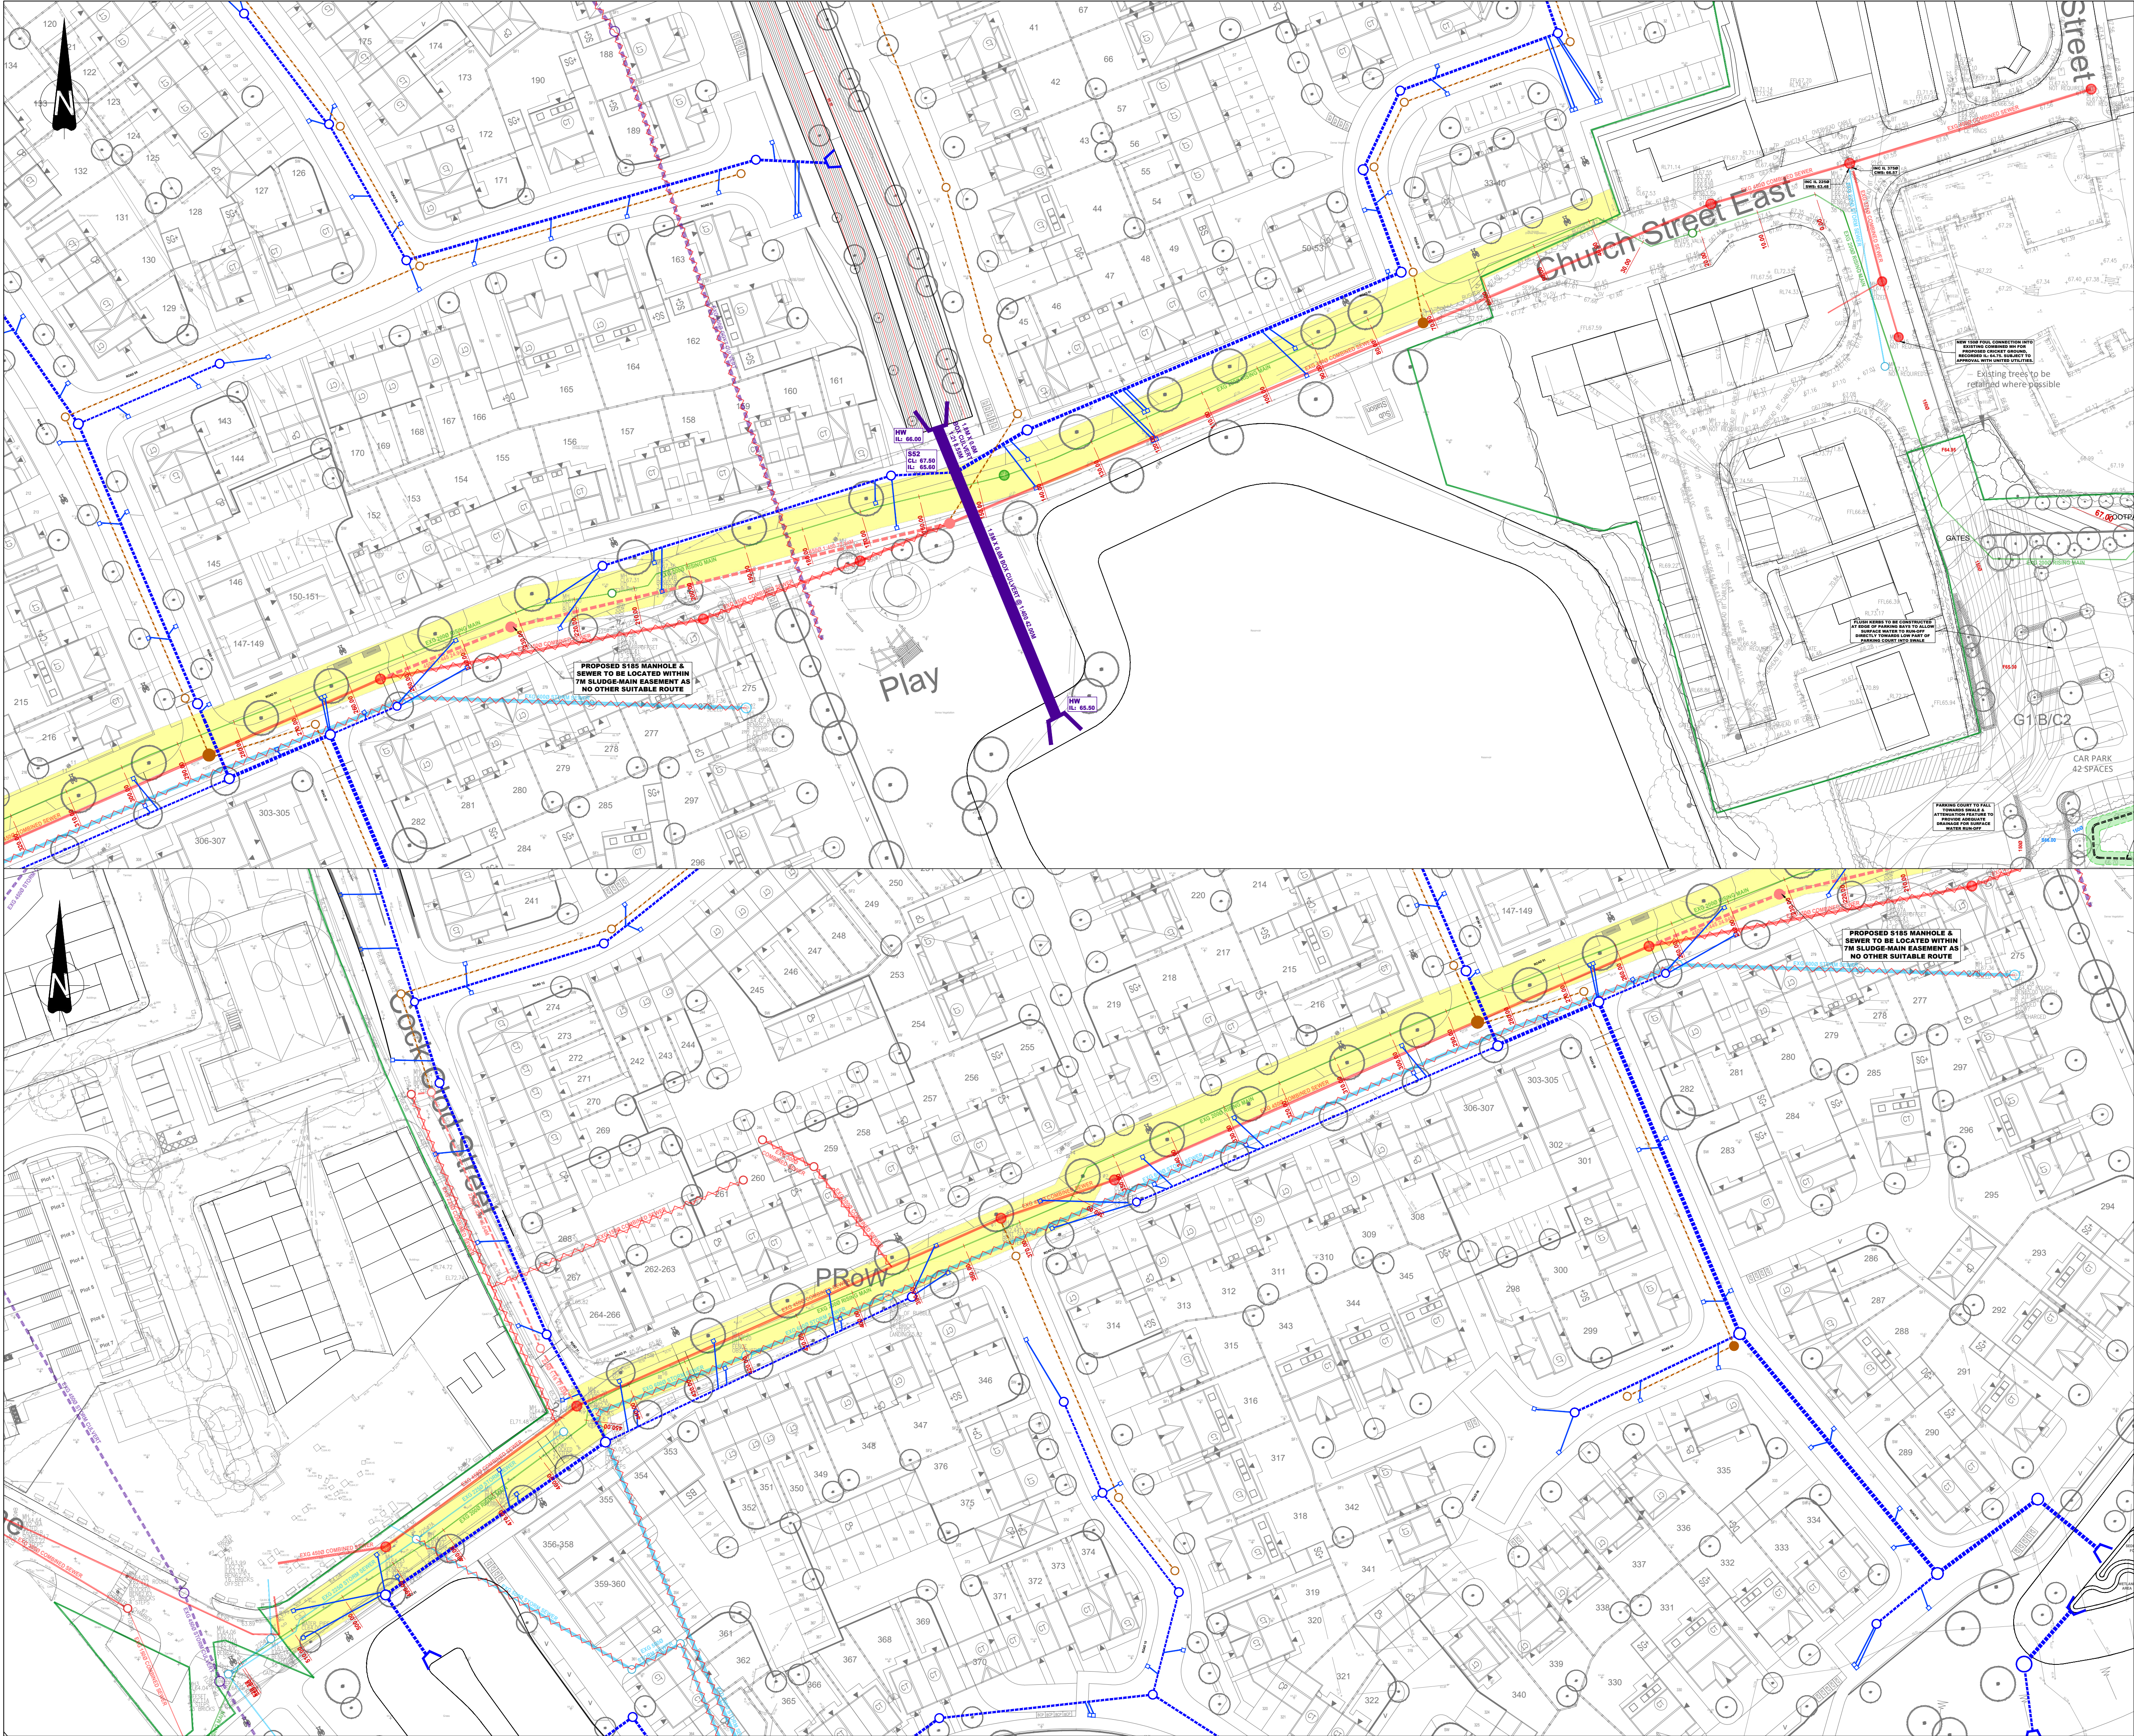

The Contractor is to check and verify in conjunction with the Architects details all setting out points, building and site dimensions, levels and sewer invert levels at connection points and ensure that they are fully compliant with the contents and requirements of the site investigation report before work starts. The Contractor is to comply in all respects with current building legislation, British Standard Specifications, Building Regulations etc, whether or not specifically stated on this drawing.

This drawing is not intended to show details of ground conditions or ground constraints. Each area of ground relied upon to support any structure depicted (including drainage) must be investigated by the Contractor any areas of formation for said structure which do not accord with the anticipated conditions as described in the site investigation report are to be immediately notified to the Engineer, where applicable, any suspect flat ground or ground constraints are or within the ground should be further investigated by a suitable geotechnical expert. Any earthworks shown indicate typical slopes for guidance only and should be investigated further by a suitable geotechnical expert.

Where existing trees are shown to be retained they should be subject to a full arboricultural inspection for safety. All trees are to be planted so as to ensure they are a minimum of 5 metres from buildings and 3 metres from drainage and services, where applicable. A foundation is to be provided to accommodate the proposed tree planting, where applicable.

© This drawing and the building works depicted are the copyright of Banners Gate Ltd and may not be reproduced or amended except by written permission. No liability will be accepted for assessments made by other parties.

GENERAL NOTES

- This drawing is to be read in conjunction with relevant architectural and engineering drawings.
- Levels indicated in blocks are Finished floor levels and are 150mm above adjacent finished ground levels unless otherwise shown.
- Levels of the existing road at the point of tie-in with proposed site road must be checked prior to commencement of works.
- Any discrepancies between the details shown and actual on site conditions to be reported immediately to the engineer prior to commencement of works.

SHOWN SLUDGE MAIN ROUTE & INVERT LEVELS HAVE BEEN BASED ON AS-BUILT 'UNITED UTILITIES PLC MERSEY VALLEY SLUDGE PIPELINE - AMP4' SERIES OF DRAWINGS. THE SLUDGE MAIN SHOULD BE INVESTIGATED ITS ENTIRETY TO CONFIRM LOCATION, SIZE, IL & CL PRIOR TO DETAILED DESIGN. PROPOSED DRAINAGE STRATEGY LEVELS ARE CRITICAL TO THIS INFORMATION.

C B A -	Plan updated to suit latest layout.	01/08/24	LJ
	3m easement either side of sludge main added to plan.	03/07/24	LJ
	Manholes & sewers in close proximity to sludge main have been moved.	06/06/24	LJ
	First issue	17/04/24	LJ
Rev.	Description	Date	By

Drawing Status **PLANNING**

Please note whilst these drawings may be used for tender purposes, drawings are subject to the United Utilities approval as part of ongoing consultations and design checks. Amendments may therefore be requested.

Client

Project Papermills, Bury, Lancashire

Title Sludge Main - Longitudinal Section
Sheet 1 of 2

BANNERS GATE

CIVIL, STRUCTURAL & ARCHITECTURAL DESIGN SERVICES

10-11 Birmingham Street, Halesowen, West Midlands B63 3HN
Tel: 0121 687 1500 Fax: 0121 687 1501
E-mail: mail@bannersgate.com

Scale	A1 @ 1:500	Drawn	LB
Date	April 2024	Checked	LJ
File	22166/drawings/civils/current	Drawing	22166 / PL231-C