

THIS DRAWING IS INDICATIVE AND REPRESENTS ONLY THE DESIGN INTENT, THE CONTRACTOR MUST PRODUCE FULLY CO-ORDINATED WORKING / INSTALLATION DRAWINGS AS REFERRED TO IN THE CONTRACT DOCUMENTATION


NOTES

1. STRIP OUT OF DENOTES EQUIPMENT, PLANT & DISTRIBUTION TO INCLUDE ALL MISC ASSOCIATED SERVICES, INCLUDING BUT NOT LIMITED TO BRACKETS / CLIPS, HANGERS, SECONDARY / SUPPORT STEELWORK, SCREWED RODS FIXINGS, SCREWS / NUTS / BOLTS / WASHERS, THERMAL OR ACOUSTIC INSULATION.
2. ANY EQUIPMENT, PLANT & DISTRIBUTION WHICH IS TO REMAIN IN SITU TO BE ADEQUATELY RE-SUPPORTED IF ALL OR PART OF SYSTEM HAS BEEN SUPPORTED FROM SERVICES WHICH ARE TO BE REMOVED.
3. ANY SUPPORT SYSTEM WHICH HAS BEEN MADE UNSAFE THROUGH THE DENOTES STRIP OUT SHALL BE MODIFIED AS NECESSARY TO ENSURE THEY ARE SAFE.
4. ALL HOLING THROUGH FIRE BARRIER & BUILDING FABRIC DUE TO REMOVAL OF SYSTEM TO BE REPAIRED BY APPROVED SPECIALISTS.
5. ENSURE ALL DEAD ENDS AS PART OF WORKS ARE STRIPPED OUT AS FAR BACK AS PRACTICALLY POSSIBLE & SUITABLY CAPPED.

LEGEND

- PIPEWORK IN CEILING VOID
- PIPEWORK AT HIGH LEVEL
- PIPEWORK AT LOW LEVEL
- PIPEWORK BELOW FINISHED FLOOR LEVEL

- CV = CEILING VOID
- FA = FROM ABOVE
- TA = TO ABOVE
- FB = FROM BELOW
- TB = TO BELOW
- HL = HIGH LEVEL
- LL = LOW LEVEL
- IV = ISOLATING VALVE
- SV = STOP VALVE
- BV = 1/4 TURN BALL VALVE
- LSV = LOCKSHIELD VALVE
- NRV = NON RETURN VALVE
- DCVA = DOUBLE CHECK VALVE
- DOC = DRAIN-OFF COCK

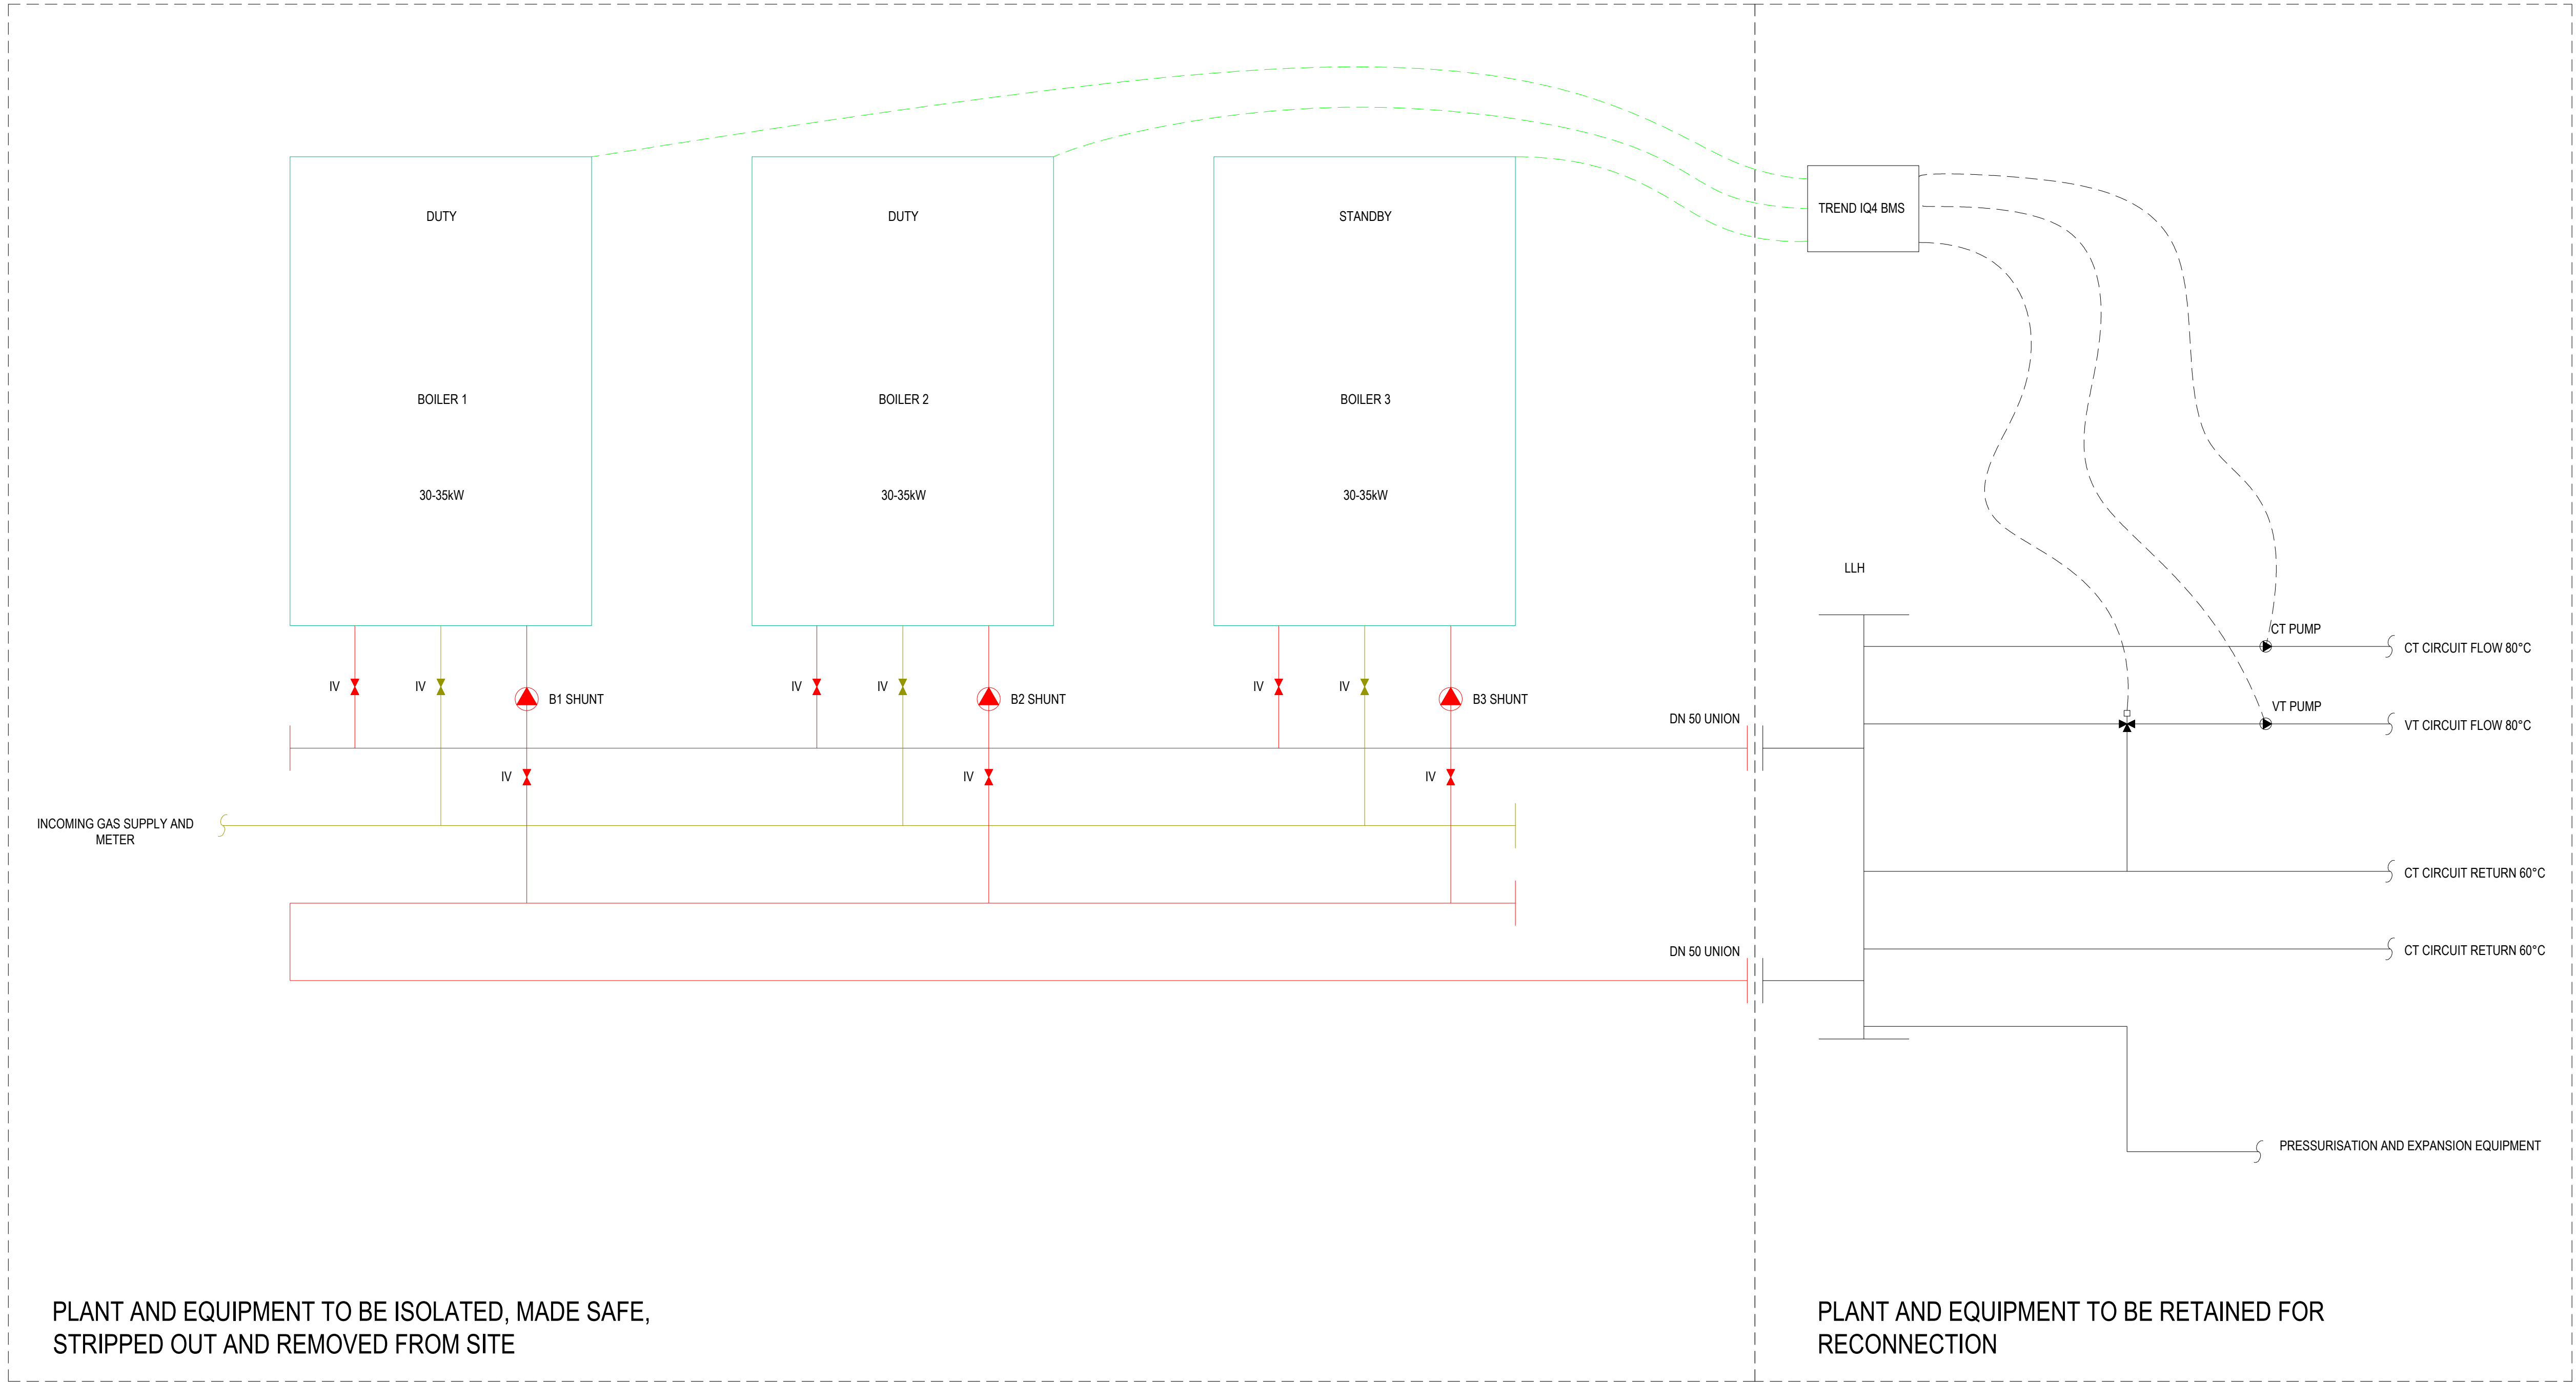

P01	STAGE 4 ISSUE	SI	IC	TC	05/24
REV	DESCRIPTION	BY	CHK	APP	DATE

Project Status:

STAGE 4



ENGINEERING POWERED BY THE PAST
BUILDING THE FUTURE

Core, Worklife
Brown Street
Manchester, M2 1DH
T 44 (0) 161 239 8318
www.harleyhaddow.com

Project: 312991

GREATER MANCHESTER
FIRE AND RESCUE SERVICE
CARBON 4 PROJECTS

Drawing Title:

BURY COMMUNITY FIRE
STATION PROPOSED
STRIP-OUT OF LTHW SYSTEM

Scale @ A1
N.T.S

Date
APR 2024

Engineer
SI

Drawing No.

312991-HAH-BY-00-D-M-05601

Revision

P01