


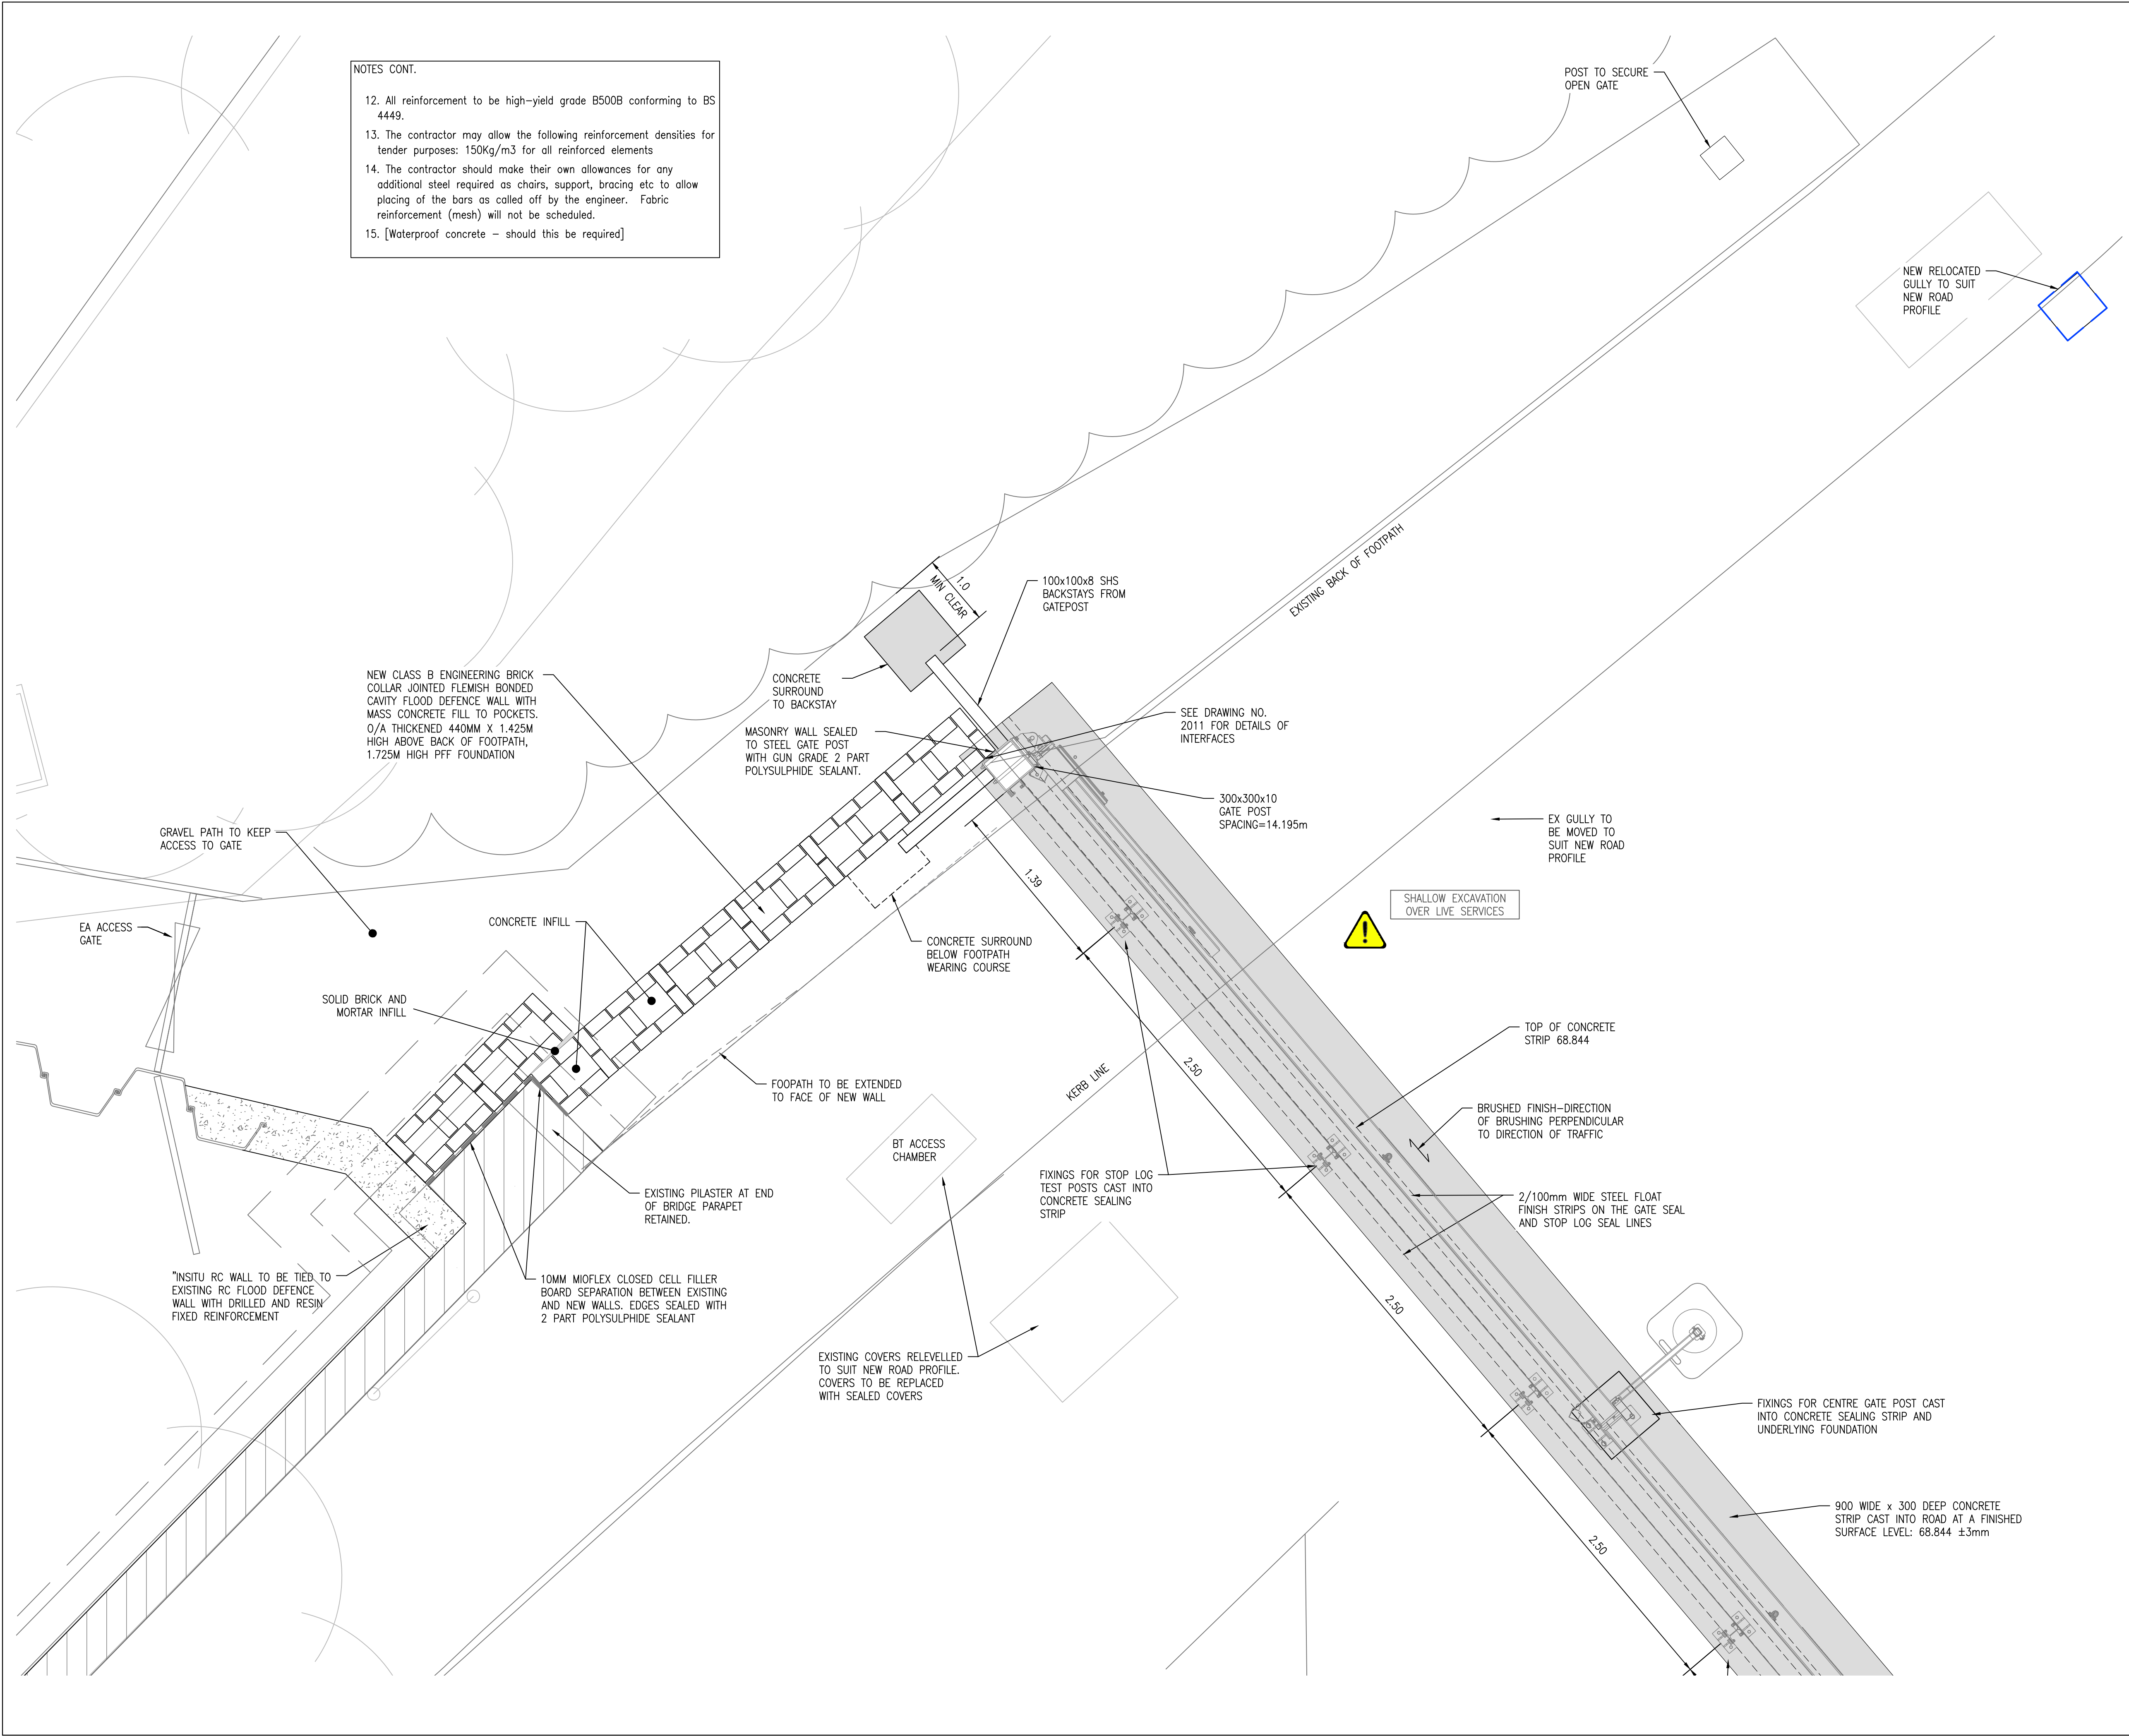

NOTES CONT.

12. All reinforcement to be high-yield grade B500B conforming to BS 4449.

13. The contractor may allow the following reinforcement densities for tender purposes: 150Kg/m3 for all reinforced elements

14. The contractor should make their own allowances for any additional steel required as chairs, support, bracing etc to allow placing of the bars as called off by the engineer. Fabric reinforcement (mesh) will not be scheduled.

15. [Waterproof concrete – should this be required]

Do not scale from this drawing.				
SAFETY HEALTH AND ENVIRONMENTAL INFORMATION				
IN ADDITION TO THE HAZARD/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING RISKS AND INFORMATION.				
RISKS LISTED HERE ARE NOT EXHAUSTIVE. REFER TO DESIGN ASSESSMENT FORM NO.				
CONSTRUCTION				
1. HIGHWAY TRAFFIC				
2. EXISTING SERVICES				
3. FRAGILE BRIDGE STRUCTURE				
DEMOLITION				
1. AS CONSTRUCTION				
FOR INFORMATION RELATING TO USE, CLEANING AND MAINTENANCE SEE THE HEALTH AND SAFETY FILE				
IT IS ASSUMED THAT ALL WORKS WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR WORKING, WHERE APPROPRIATE, TO AN APPROVED METHOD STATEMENT.				
NOTES:				
1. REFER TO 159751-2020 FOR CONCRETE & STEELWORK NOTES				
Rev.	Date	Description	Drwn.	Chkd.
1		WALL AND GATE UPDATES	JM	JRT
2		DEFENCE WALL AMENDED, BACKSTAY'S AMENDED/ADDED	JM	JRT
3		REVISED DRAWING NUMBER	JM	JRT
4		BRIDGE FLOOD WALL MOVED AND HAZARD TRIANGLES ADDED	JM	JRT
5		NOTES ADDED	JM	JRT
Client:			Drwn.	Chkd.
FAIRHURST			Drwn.	Chkd.
51a St. Pauls Street LEEDS LS1 2TE Tel: 0113 243 4671 Fax: 0844 381 4412			Drwn.	Chkd.
A.E. YATES Group			Drwn.	Chkd.
Project Title:				
HARDY'S GATE BRIDGE				
DUMERS LANE				
BURY				
Drawing Title:				
NORTH GATE				
UPSTREAM GENERAL ARRANGEMENT				
Scale of A1:		Status:		
1:100		PRELIMINARY		
Drawn:		Checked:		Approved:
JM		JRT		JRT
Date:		Date:		Date:
25/06/24		25/06/24		25/06/24
Drawing No.:		Fairhurst Ref No.: 159751/2012		
		ENV0000389C-FHT-00-DR-C-2012		
				Revision:
				E