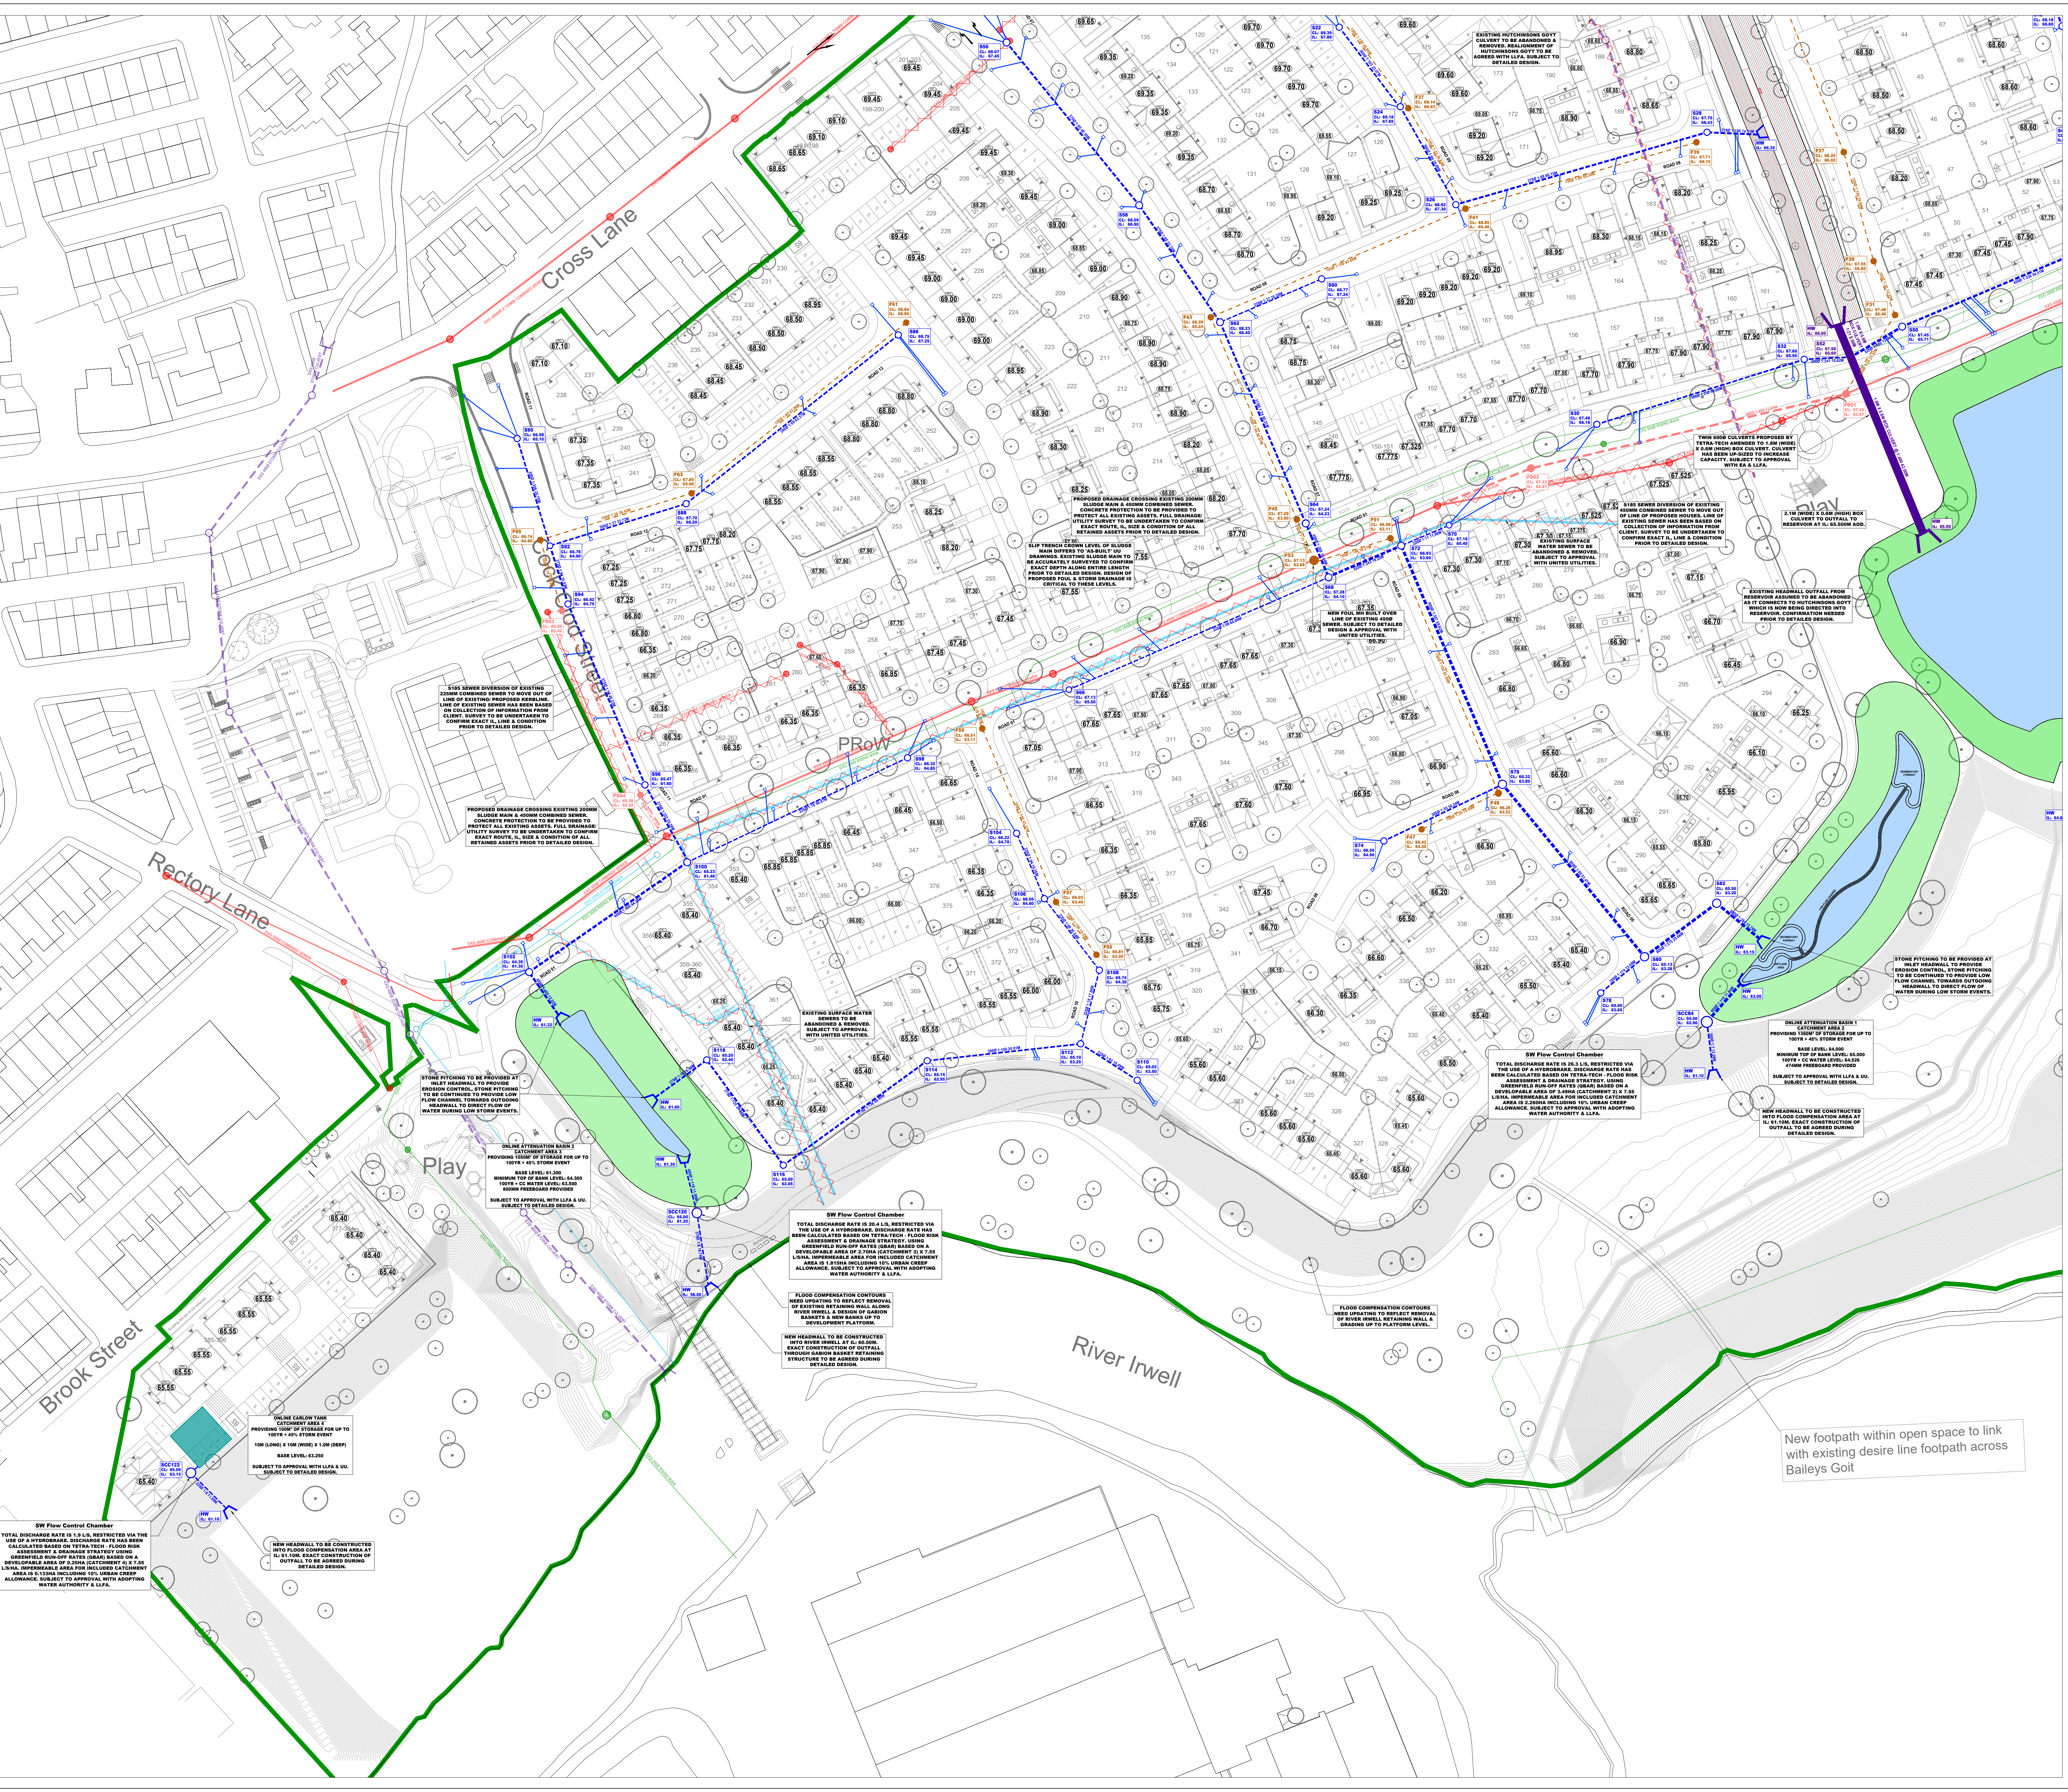


[illegible]

- Where cover to a pipe is less than 1200mm under adoptable carriageway it shall be provided with concrete protection in accordance with the specification of the adopting authority and backfill filled to form a firm surface to the carriageway and compacted DTP-Type 1 material.
- Where concrete bed and surround is specified flexibility of joints is to be maintained by using compressible blinders incorporated Ribbeard at each joint interval.
- All existing drainage pipe joints, diameters and locations are to be checked by the Contractor prior to the start of excavation of any proposed drainage work. Any difference between actual and drawn details is to be reported to the Engineer immediately.
- Positions of existing silt/ventilatory underground apparatus adjacent to or crossing proposed sewers is to be checked by the Contractor prior to starting work.
- Trench bedfall to be stone balled, excavated material is not accepted & trenches to be backfilled in

- Storm Water Network
- Foul Water Network
- Combined Water S185 Sewer Diversion
- Storm Water Carlow Tank
- Hutchinsons Goyt Realignment Culvert
- Existing Public Combined Sewer
- Existing Storm Water Drainage
- Existing Culverted Water Course
- Existing Public Sludge Main
- Existing Sewer To Be Abandoned
- Proposed Development Platform Contours (Derived by Tensar Text)
- Development Boundary

EXISTING SEWERS/ UTILITIES HAVE BEEN SHOWN BASED ON PROVIDED SEWER RECORDS, CCTV, DRAINAGE SURVEYS & INTERPOLATION BETWEEN ALL INFORMATION AVAILABLE. EXACT LOCATION, SIZE, IL & CL OF EXISTING ASSETS NEEDS TO BE CONFIRMED PRIOR TO DETAILED DESIGN.

G	Drainage strategy amended to suit latest layout.	22/10/2024	LJ
F	Drainage strategy amended to suit latest layout.	31/07/2024	LJ
E	Minimum FFL's on western side of site raised to suit client comments.	05/04/2024	LJ
D	FFL's to plots 333-334 & 353-367 amended.	31/11/2023	DA
C	Drainage amended to remove northern suds features & catchment areas revised to go into reservoir & to suit latest layout as per client request.	25/10/2023	LJ
B	Hutchinson's Groy banks amended to 1:3 to suit client request.	10/02/2023	LJ
A	Drainage strategy plan amended to suit latest layout changes & to suit Tetra-Tech information.	20/01/2023	LJ
-	First Issue	12/12/2022	LJ

Drawing Status

PLANNING

Please note while these drawings may be used for tender purposes, drawings are subject to the United Utilities & Highways approval as part of ongoing consultations and design checks. Amendments may therefore be requested.

Project	
	Papermills, Bury, Lancashire
Title	Drainage Strategy - Layout Plan - Sheet 2 of 2



BANNERS GATE

CIVIL, STRUCTURAL & ARCHITECTURAL DESIGN SERVICES

10-11 Birmingham Street, Huddersfield, West Yorkshire HD2 3JH

Tel: 01422 687 1800 Fax: 01422 687 1801

E-mail: info@bannersgate.co.uk