



ARBORICULTURAL REPORT (BS 5837:2012)

FOR
PROPOSED DEVELOPMENT

AT

FORMER WATERSIDE PUB
KAY STREET
SUMMERSEAT
BURY

November 2024

Job Number 4014

DEP Landscape Architecture Ltd | 0161 241 9878 | info@dep.co.uk

www.deplandscape.co.uk

TABLE OF CONTENTS

Contents	Page No.
1.0 INTRODUCTION	3
1.1 Professional Details	3
1.2 Tree Survey	3
2.0 FINDINGS	4
2.1 The Site	4
2.2 The Soil and Foundations	4
2.3 The Trees	4
2.4 Standard of Work	4
2.5 Statutory Controls	4
2.6 Wildlife	5
3.0 DISCUSSION	5
4.0 ARBORICULTURAL IMPLICATIONS ASSESSMENT	6
5.0 MITIGATING PROPOSALS	8
5.1 Tree Losses and Replacement Planting	8
5.2 Development	8
6.0 METHOD STATEMENT	9
6.1 Tree Works	9
6.2 Protective Fencing	9
6.3 Additional Precautions Outside Fenced Areas	11
6.4 Methodology for Excavation within Root Protection Areas	11
6.5 Site Buildings	12
6.6 Services	12
6.7 Summary of Methodology for the Protection Trees	12
6.8 Conclusion	13

APPENDIX A – Glossary of Terms and Table 1 of BS 5837:2012

APPENDIX B – Arboricultural Data

APPENDIX C – Key References

APPENDIX D - NJUG 10 Section 4.0

APPENDIX E – Site Notice for Protective Fencing

APPENDIX F – Site Plans

Disclaimer

The tree(s) referred to in this report are living entities and are therefore subject to natural processes. They will also be subject to changes to their environment caused by human's activities and to exceptional weather conditions. The inspection undertaken by our qualified staff relies on visual attributes of tree health and structure which can be assessed from a ground based inspection. Hidden defects which are not readily visible may not be detected. We therefore cannot wholly guarantee the condition and safety of the trees inspected beyond what can be reasonably assessed from the procedure used. We would recommend that the trees are regularly inspected and our staff will advise on the suitable frequency of these inspections.

1.0 INTRODUCTION

1.1 Professional Details

- 1.1.1 My name is Peter Murray and I have been working and studying in the Arboricultural Industry since 1989. I have many years practical and consulting experience as a Local Authority arboriculturalist and more recently as a private sector practitioner.
- 1.1.2 I so far hold the Higher National Diploma in Arboriculture and am a professional member of the Arboricultural Association. I keep up to date with the latest research and best practice by attending relevant courses and seminars.

1.2 Tree Survey

- 1.2.1 We were previously instructed by Kingsley Properties to carry out a site visit at the former Waterside Pub, Summerseat, Bury and survey all significant trees that may be affected by development proposals in accordance with *BS 5837:2012 trees in relation to design, demolition and construction – Recommendations*.
- 1.2.2 The survey on which the findings of this report are based was first undertaken on Wednesday 26th September 2018 and more recently updated on 13th February 2023.
- 1.2.3 This report should be read in conjunction with the attached Arboricultural Data and Site Plans of Appendix B and F.
- 1.2.4 The trees were inspected from ground level only and all comments and recommendations made have taken into account their location, surroundings and likely impact on persons or property.
- 1.2.5 The limitations of this report are restricted to the persons, time, information made available and purpose for which this report has been prepared. This report does not deal with any existing tree root/building conflicts and no information has been provided regarding soil type and no analysis undertaken by this company.

2.0 FINDINGS

2.1 The Site

2.1.1 The site in question was a former pub, which recently collapsed into the river. The site has now been cleared save for several tree trunks and branches.

2.1.2 The proposal is for five new dwellings.

2.2 The Soil and Foundations

2.2.1 The soil of the site is described at <http://www.landis.org.uk/soilscapes> as being 'Loamy and clayey floodplain soils with naturally high groundwater'.

2.2.2 The following is taken from the NHBC Standards Chapter 4.2 Building near trees: The combination of shrinkable soils and trees, hedgerows or shrubs represents a hazard to structures that requires special consideration. Trees, hedgerows and shrubs take moisture from the ground and, in cohesive soils such as clay, this can cause significant volume changes resulting in ground movement. This has the potential to affect foundations and damage the supported structure. In order to minimise this risk, foundations should be designed to accommodate the movement or be taken to a depth where the likelihood of damaging movement is low.

2.3 The Trees

2.2.1 A total of twenty individual trees and four groups were surveyed and plotted in order to assess their health and dimensions in accordance with the British Standard and the results are clearly detailed within the Appendices of this report.

2.2.2 In general the trees within the site were found to be in moderate condition for their age and species. Any works identified within the data tables should take place regardless of development in line with best practice. The quality rating for the trees on or affecting this site can be summarised as follows:

U – 5 trees (T9, T14, T15, T17 & T18)

A – 0 trees/groups

B – 5 trees/groups (T3, T6, T10, T13 & G3)

C – 14 trees/groups (T1, T2, T4, G1, T5, T7, G2, T8, T11, T12, T16, T19, T20 & G4)

2.4 Standard of Work

2.4.1 Any tree work undertaken should be done in accordance with British Standard 3998:2010 and by competent contractors insured with public liability cover of at least two million pounds.

2.5 Statutory Controls

- 2.5.1 If the trees on site are subject to any Tree Preservation Orders (TPO's) or are encompassed within a Conservation Area then statutory permission from the Local Planning Authority (LPA) will be required before any tree works take place. A recent check on Bury Councils Online Mapping service revealed that none of the trees are protected by a TPO but the site is within the Brooksbottoms, Rowlands Conservation Area.

2.6 Wildlife

- 3.5.1 All operations should take account of wildlife needs and be planned to take advantage of weather conditions and time of year for minimum damage and disturbance. If any protected species or nesting birds are present or discovered while the works are taking place all work should cease until contact has been made with Natural England for further advice. Natural England can be contacted on 0300 060 3900 or by e-mail to: enquiries@naturalengland.org.uk. Specific consideration should be given to the possible presence of roosting bats, which are protected by the Wildlife and Countryside Act 1981 (schedule 5) and included in schedule 2 of the Conservation Regulations 1994. Ideally, a survey should be carried out to identify any potential roost sites and if bats are found to be present advice should be sought from a person qualified and experienced in handling such matters and fully conversant with the implications of the Act.

3.0 DISCUSSION

- 3.1 The majority of the root system, of a tree, is in the surface 600mm of the soil, extending radially for distances frequently in excess of the trees height. Beyond the main structural roots (close to the base of the trunk), the root system rapidly sub-divides into smaller diameter roots: off this main system, a mass of fine roots develops.
- 3.2 The shape of the main structural roots develops in response to the need for the tree to have physical stability. Beyond these major roots, root growth and development is influenced by the availability of water and nutrients. Unless conditions are uniform around the tree, which would be unusual, the extent of the root system will be very irregular and difficult to predict. It will not generally show the symmetry seen in the branch system.
- 3.3 The parts of the root system, which are active in water and nutrient uptake, are very fine, typically less than 0.5mm diameter. They are short lived, developing in response to the needs of the tree, with the majority dying each winter. It is *essential* that conditions in the soil remain conducive to the healthy growth of these fine roots so that the water and nutrients necessary for healthy tree growth can be absorbed.

- 3.4 All parts of the root system, but especially the fine roots, are vulnerable to damage. Once they are damaged, water and nutrient uptake will be restricted until new roots have regenerated. Vigorous young trees will be capable of rapid regeneration but over mature trees will respond slowly, *if at all*.
- 3.5 In order to live and grow, roots need oxygen from the soil. Respiration by the roots and other soil organisms depletes this oxygen and increases carbon dioxide levels in the soil; a correct balance of these gases is normally maintained by diffusion between the soil and the atmosphere. Anything, which disturbs this balance, will affect the condition of the root system.
- 3.6 The factors that most commonly affect this diffusion adversely, and therefore damage roots, are the following: -
- a) Compaction of the ground, which reduces the space between soil particles. This is particularly important on clay soils. A single passage by heavy equipment on clay soils or storage of heavy materials can cause significant damage.
 - b) Changing soil levels, even for a few weeks.
 - c) Covering the root area with impervious surfaces.
 - d) A rise in the level of the water table. Roots can tolerate submersion for short periods. But a permanent rise will deplete the soil of oxygen.
- 3.7 Serious damage is often caused during preliminary site works by stripping the topsoil. For this reason, such works should be avoided until protective fencing has been erected.
- 3.8 Excavations in the rooting area can sever roots. As the majority of roots are in the surface 600mm, even shallow excavations can cause damage.
- 3.9 Excavations for foundations, landscaping or service trenches are usually sufficiently deep to sever most of the roots, and it should therefore be assumed that all parts of the root system beyond the excavation would no longer serve the tree.
- 3.10 Excavation or soil stripping which sever or damage the roots may impair the stability of the tree and make it dangerous.

4.0 ARBORICULTURAL IMPLICATIONS ASSESSMENT

- 4.1 The purpose of this section is to assess the implications, if any, the proposed development will have on the trees identified in the Tree Survey of 13th February 2023 carried out by DEP (see Appendix B & F) and advise on arboricultural measures, which would be likely to mitigate any damage resulting from the proposals.
- 4.2 The Site Layout Plan within Appendix F identifies the trees in relation to the proposed development.

- 4.3 In order to fully assess the impact of the proposals an Implications Table has been created, which gives details of the proximity of the associated works to the trees.
- 4.4 The below Implications Table details the Root Protection Area (RPA) in accordance with the British Standard 5837:2012 *Trees in relation to design, demolition and construction – Recommendations*. This is an area that should be left undisturbed in order to provide adequate rooting area for retained trees. This is also illustrated on the Site Plan of Appendix F.
- 4.5 This information can then be used to determine whether the development will have a detrimental impact on the health of the trees. Once this has been determined remedial measures can be detailed to reduce the impact the proposals will have.
- 4.6 Implications Table: -

Tree No.	Root Protection Area (m ²)	Circle Radius (m)	Distance to any proposed construction or surfacing (m)	Can the Tree be Successfully Retained
T1	91.61	5.40	n/a	Yes
T2	76.05	4.92	n/a	Yes
T3	55.42	4.20	n/a	Yes
T4	14.66	2.16	2.5	Yes
G1	<4.52	<1.20	Remove approx. 40% for development	
T5	87.58	5.28	Remove for development	
T6	99.93	5.64	Remove for development	
T7	<113.10	<6.00	3.5	Yes see 5.0
G2	<113.10	<6.00	n/a	Yes
T8	122.33	6.24	Remove for development	
T9	72.38	4.80	Remove for condition	
T10	162.86	7.20	8.0	Yes
T11	146.98	6.84	12.0	Yes
T12	108.62	5.88	5.2	Yes see 5.0
T13	104.23	5.76	6.0	Yes
T14	127.08	6.36	Remove for condition	
T15	104.23	5.76	n/a	Yes
G3	<113.10	<6.00	n/a	Yes
T16	43.47	3.72	Remove for development	
T17	21.90	2.64	Remove for condition	
T18	72.38	4.80	Remove for condition	
T19	99.93	5.64	Remove for development	
T20	72.38	4.80	Remove for development	

Tree No.	Root Protection Area (m²)	Circle Radius (m)	Distance to any proposed construction or surfacing (m)	Can the Tree be Successfully Retained
G4	<18.10	<2.40	Remove for development	

- 4.8 To assess the implications of the proposed development each tree can be categorised in the following way: -

	Trees to be Retained		Trees to be removed	
	With No Impact	With Impact within shown RPA	Due to Condition	Due to Development
Tree No.	T1, T2, T3, T4, G2, T10, T11, T13, T15 & G3	T7 & T12	T9, T14, T17 & T18	G1 (40%), T5, T6, T8, T16, T19, T20 & G4

5.0 MITIGATING PROPOSALS

5.1 Tree Losses and Replacement Planting

- 5.1.1 The loss of any tree is always regrettable although in this instance out of the eight trees/groups affected only one tree is rated higher than the C rating (T6).
- 5.1.2 It is considered that these losses can adequately compensated for within a new landscape scheme providing new tree, hedge and shrub planting.

5.2 Development

- 5.2.1 As shown above, the Implications Table identifies that T7 & T12 could be affected by the development proposals as new surfacing is shown to be within their Root Protection Area's (RPA's).
- 5.2.2 The intrusion within the radius of T7 is fairly minimal in terms of its overall RPA and a good distance from its buttress area. Therefore, provided that this excavation is carried out carefully by hand and under supervision this tree will not suffer any long term effects of development.
- 5.2.3 One of the proposed buildings is just outside of the RPA of T12 but there is to be some new surfacing for access. This intrusion is minimal and will not affect the main root area of the tree provided that the area is properly fenced off during construction.
- 5.2.4 The crown of T12 is biased over the site and will require pruning back to the boundary or thereabouts. This is quite a poor tree but located outside of the red line. There are no windows on that elevation of the property.

- 5.2.5 A clear tree works specification and details of all tree protective measures can be found in the following Arboricultural Method Statement (Section 6.0).

6.0 METHOD STATEMENT

Before any form of development commences on the site the following works should be undertaken: -

6.1 Tree Works

Tree No.	Proposed Works
G1 (40%), T5, T6, T8, T9, T14, T16, T17, T18, T19, T20 & G4	Fell to ground level and remove stumps where necessary.
T12	Prune back to boundary or thereabouts, pruning to an appropriate side shoot or branch union.


Recommended works should be carried out to the *British Standard Recommendations for Tree Work, BS 3998:2010*

6.2 Protective Fencing

- 6.2.1 Construction Exclusion Zones (CEZs) shall be enclosed by Temporary Protective Fencing and/or, where necessary, Temporary Ground Protection. All fencing used on the site should fully comply with *BS 5837:2012 Trees in relation to design, demolition and construction – Recommendations*.
- 6.2.2 The fencing should be strong and suitable for local conditions. It should also take into account the degree of construction activity on the site.
- 6.2.3 In this circumstance the location for the protective fencing should be as shown on the Tree Protection Plan of Appendix F and of the following specification:
- 6.2.4 Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height. The panels shall stand on rubber or concrete feet and butt together and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a block tray base (Figure 3b). No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.

Figure 3(a): Type 2 Fencing (BS5837:2012 above-ground strut stabilising system with ground pins)

Figure 3 Examples of above-ground stabilizing systems

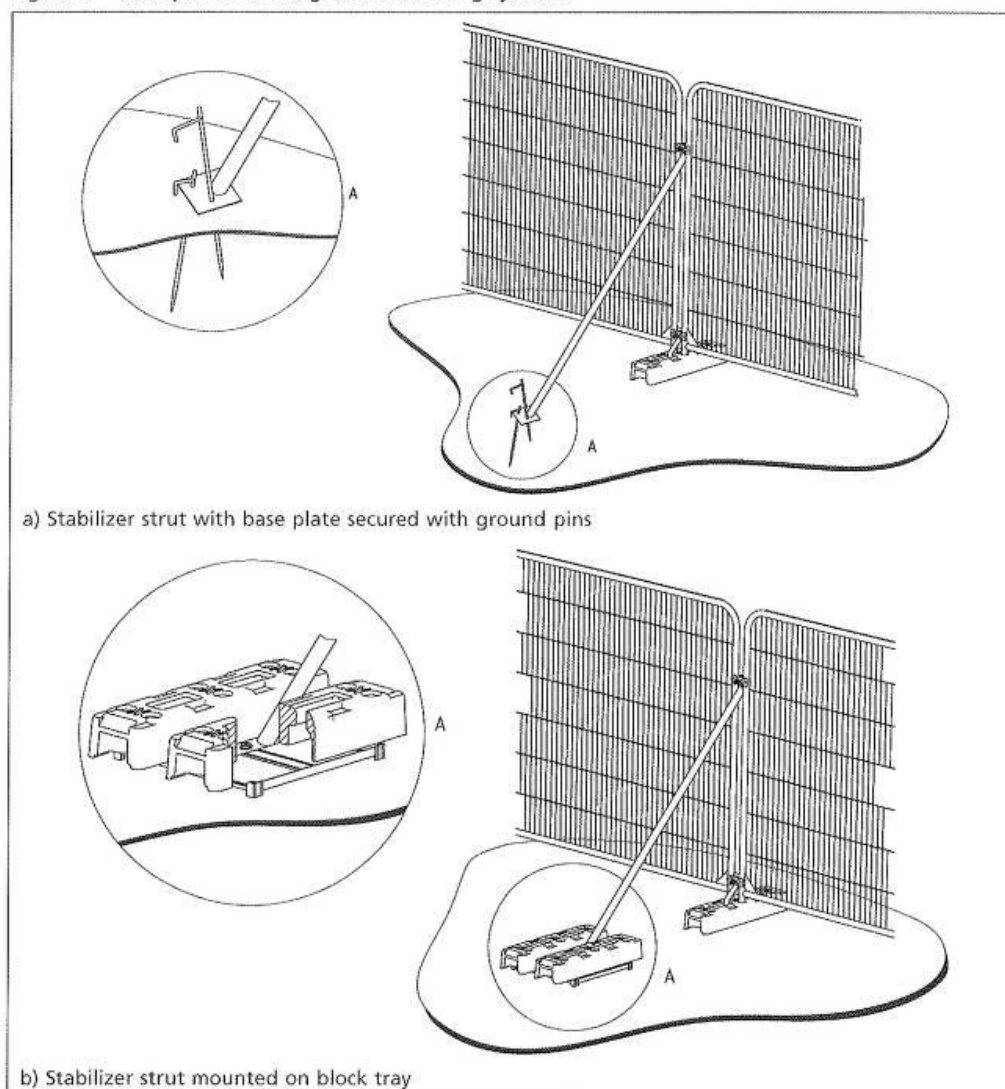

- 6.2.5 No storage of materials or any construction operations should occur within the fenced area. Additionally, when designing the site layout, account should be taken of the route/installation method of underground services/drains and, the route/construction method of new access roads/driveways in relation to the retained trees. It would be advisable to mark out the optimum position of the protective fencing on the ground prior to finalisation of any design proposal.
- 6.2.6 Notices should also be erected on the fencing stating 'Protected Area - No operations within fenced area'. An example can be found in Appendix E, which should be laminated and attached to the fencing at regular intervals.
- 6.2.7 The positioning of the protective fencing is also very important and should be erected in the proposed location identified on the site plan of Appendix F. Once the fence has been erected it should never be crossed and particular care should be taken not to store any materials or soil within the protected area.

6.3 Additional Precautions Outside Fenced Areas

- 6.3.1 Oil, bitumen, cement or other material likely to cause damage to the tree will not be stacked or discharged within 10m of the trees stem or within the protective area. Also materials in general will not be stacked or discharged within the exclusion zone.
- 6.3.2 Concrete mixing and washing will not be carried out within 10m of any retained trees.
- 6.3.3 Fires will not be lit beneath the foliage or in a position where the flames could extend to within 5m of the foliage, branches or trunk. If the fire is large then this may necessitate a distance of at least 20m.
- 6.3.4 Trees that are to be retained will not be used as anchorage for equipment.
- 6.3.5 Notice boards, telephone cables, or other services will not be attached to any part of the retained tree.
- 6.3.6 Care should be taken when using cranes or other equipment near the canopy of the retained trees. Also any trees to be felled in proximity to the retained trees should be done so with particular care.

6.4 Methodology for Excavation within Root Protection Areas (to be carried out under supervision by a competent arborist)

- 6.2.1 New surfacing is shown to be within the RPA of T7. Therefore, all excavations which have to be undertaken within the root protection area will be carried out carefully by hand, any roots encountered in those areas should be severed cleanly with a sharp tool avoiding ripping or snagging. In the event that any significant roots are uncovered and can be retained then the following shall apply; roots of a diameter more than 25mm whilst exposed should be wrapped in dry, clean hessian sacking to prevent desiccation and to protect from rapid temperature changes. Prior to backfilling, any hessian wrapping should be removed and retained roots should be surrounded with sharp sand (builders' sand should not be used because of its high salt content which is toxic to tree roots), or other loose granular fill, before soil or other material is replaced. This material should be free of contaminants and other foreign objects potentially injurious to tree roots.

6.5 Site Buildings

- 6.5.1 Site cabins, compounds and welfare should all be placed outside of the protection areas of retained trees.
- 6.5.2 Where this is not possible further advice should be sought from the appointed arborist and in some circumstances it may be possible to construct temporary ground protection and adjust fencing but this is only to be considered as a last resort.
- 6.5.3 On larger sites of more intensive development where there is little open space for site buildings then alternative arrangements off site should be considered or part of the site should remain undeveloped until the final stages when less site storage is needed.

6.6 Services

- 6.6.1 Where possible all service trenches should be dug outside of the Root Protection Area.
- 6.6.2 Should this not be possible then the guidelines within 'NJUG 10' *Guidelines for the Planning, Installation and Maintenance of Utility Services in Proximity to Trees* should be adopted, in particular Section 4.0, which is included within Appendix D of this report.

6.7 Summary of Methodology for the Protection Trees

- 1. Remedial tree works carried out in accordance with this report and by a competent and fully insured arboricultural contractor and in accordance with BS 3998:2010.**
- 2. Erection of Protective Fencing in accordance with this Method Statement and plan of Appendix F and to be checked by the appointed arboriculturalist before commencement of works.**
- 3. The construction of the new development including the careful excavation for new surfacing within the RPA of T7 as detailed above and shall be done under the supervision of a competent arboriculturalist.**
- 4. The removal of Protective Fencing is only to be done with the agreement of a competent arborist or the LPA.**
- 5. New landscaping including tree, hedge and shrub planting.**

6.8 Conclusion

Provided that all the above measures are put into practice this development should not have a detrimental effect on the amenity of the area in terms of tree cover as the majority of trees can be retained.

Signed

A handwritten signature in black ink, appearing to read 'P. Murray', is written in a cursive style.

Peter Murray (HND. ARB, M, Arbor A)
Arboricultural Consultant for DEP Landscape Architecture Ltd

2 Commercial Street
Manchester
M15 4RQ

Tel: 0161 241 9878

18th November 2024

APPENDIX A - Glossary of Terms & Table 1 of BS 5837:2012

The following terms are concurrent with best Arboricultural practice and within the guidelines set by the International Society of Arboriculture (ISA), the Arboricultural Association (AA) and the British Standards Institute (BSI).

Dbh: Diameter at Breast Height is measured at 1.5m and recorded in millimetres. Where a tree becomes multi-stemmed below 1.5m the diameter of each stem is measured at 1.5m and added together. Where a tree has low branching or has swelling the stem is measured at the narrowest point below.

Height: Height was estimated and recorded in metres.

Age Range: Age is site specific and categorised:

Young (Y)	Out-planted trees that have not yet established.
Semi-Mature (SM)	Established trees up to 1/3 of expected height and crown.
Early Mature (EM)	Between 1/3 and 2/3 of expected height and crown.
Mature (M)	Between 2/3 and full expected height and crown.
Fully Mature (FM)	Full expected height and crown.
Over Mature (OM)	Crown beginning to break-up and decrease in size.
Senescent (S)	Crown in advanced stage of break-up.

Crown Spread: Measured in metres at four cardinal points (N, E, S & W).

Crown Clearance: Measured in metres from the ground to the first branch tip on development side only.

Condition - Assessment of current physiological condition and structural morphology incorporating vigour and vitality and categorised:

- A - Tree needing little, if any attention
- B - Tree with minor, but rectifiable defects, or in the early stages of physiological stress
- C - Tree with significant structural and physiological flaws and/or extremely stressed
- D - Tree that is dead, biologically/physically moribund or dangerous

Desirability To Retain – As Outlined in Table 1 of BS 5837:2012 Trees in relation to design, demolition and construction – Recommendations (see below).

Definition of Physiological & Morphological Terms

Adaptive Growth - The process whereby wood formation is influenced both in quantity and in quality by the action of gravitational force and mechanical stresses on the cambial zone.

Bifurcation – Forked or divided union.

Brown Rot - Form of decay where cellulose is degraded, while lignin is only modified.

Cankers (target or tumorous) - A localised area of dead bark and cambium on a stem or branch, caused by fungal or bacterial organisms, characterised by woundwood development on the periphery. This may be annual or perennial.

Cavity - An open wound, characterised by the presence of extensive decay and resulting in a hollow.

Chlorotic Leaf - Lacking in chlorophyll, typically yellow in colour.

Compartmentalisation - The physiological process that creates the chemical and mechanical boundaries that act to limit the spread of disease and decay organisms.

Coppicing - Is an ancient form of woodland management that involves repetitive felling on the same stump, near to ground level, and allowing the shoots to re-grow from that main stump. (Also known as the coppice stool).

Crack - Longitudinal spilt in stem or branch, involving bark and/or underlying wood. These may be vertically and horizontally orientated.

Decay - Process of degradation of woody tissues by fungi and bacteria through decomposition of cellulose and lignin.

Deadwood - Deadwood is often present within the crown or on the stems of trees. In some instances it may be an indication of ill health, however, it may also indicate natural growth processes. If a target is present beneath the tree, deadwood may fall and cause injury or damage and should be removed, otherwise deadwood can remain intact for conservation purposes (insects, fungi, birds etc.).

End Weight - The concentration of foliage at the distal ends of stems and deficient in secondary branches.

Girdling Root - Root which circles and constricts the stem or roots causing death of phloem and/or cambial tissue.

Hazard Beam - An upwardly curved branch in which strong internal stresses may occur without the compensatory formation of extra wood (longitudinal splitting may occur in some cases).

Included Bark Union - Pattern of development at branch junctions where bark is turned inward rather than pushed out. Potential weakness due to a lack of a woody union.

Ivy Growth - Ivy growth may ascend into the tree's crown, increasing wind resistance, concealing potential defects and reducing the tree's photosynthetic capacity. Ivy growth is often acceptable in woodland areas as a conservation benefit.

Live Crown Ratio - The relative proportion of photosynthetic mass (leaf area) to overall tree height.

Reaction Wood - Specialised secondary xylem, which develops in response to a lean or similar mechanical stress, attempting to restore the stem to the vertical.

Root Plate Lift - The physical movement of the rooting plate causing soils to shift and crack. May occur during adverse weather conditions. Trees may become unstable.

Structural Defect - Internal or external points of weakness, which reduce the stability of the tree.

Suppressed - Trees which are dominated by surrounding vegetation and whose crown development is restricted from above.

Topping - A highly disfiguring practise, likely to cause severe xylem dysfunction and decay in major structural parts of the wood.

White Rot - Form of decay where both cellulose and lignin are degraded.

Wound - Any injury, which induces a compartmentalisation response.

Woundwood - Wood with atypical anatomical features, formed in the vicinity of a wound and a term to describe the occluding tissues around a wound as opposed to the ambiguous term "callus."

Woodland Structure - The vertical and horizontal arrangement of trees within a group or woodland i.e. Dominant - trees with a crown above the upper layer of the canopy, Co-dominant trees that define the general upper edge of the canopy, Intermediate trees that have been largely overgrown by others, Suppressed trees that have been overgrown and occupy an under storey position and grow slowly, often severely asymmetrical.

Note: The definitions described above, may not necessarily be included within the Arboricultural Survey Data.

Table 1 – Cascade chart for tree quality assessment

Category and definition	Criteria (including subcategories where appropriate)		
Trees unsuitable for retention (see note)			
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	- Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other U category trees (i.e. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning) - Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline - Trees infected with pathogens of significance to the health and/or safety of other trees nearby (e.g. Dutch elm disease), or very low quality trees suppressing adjacent trees of better quality Note – Category U trees can have existing or potential conservation value which it might be desirable to preserve; see 4.5.7.		
	1 Mainly arboriculture qualities	2 Mainly landscape qualities	3 Mainly cultural values, including conservation
Trees to be considered for retention			
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual, or those that are essential components of groups or formal or semi-formal arboriculture features (e.g. the dominant and/or principal trees within an avenue)	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features	Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood pasture)
Category B Trees of moderate quality with an estimated remaining life expectancy of at least 20 years	Trees that might be included in category A, but are downgraded because of impaired condition (e.g. presence of significant though remediable defects, including unsympathetic past management and minor storm damage), such that they are unlikely to be suitable for retention for beyond 40 years; or trees lacking the special quality necessary to merit the category A designation	Trees present in numbers, usually as groups or woodlands, such that they attract a higher collective rating than they might as individuals; or trees occurring as collectives but situated so as to make little visual contribution to the wider locality	Trees with material conservation or other cultural value
Category C Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 150 mm	Unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories	Trees present in groups or woodlands, but without this conferring on them significantly greater collective landscape value; and/or trees offering low or only temporary/transient landscape benefits	Tree with no material conservation or other cultural value

APPENDIX B – Arboricultural Data

Arboricultural Data Sheet: Former Waterside Pub, Kay Street, Summerseat, Bury										Date of Survey: 13/02/23	Weather: Dry & bright	Surveyor: PM			
Crown C = Crown Clearance; Cond R = Condition Rating; ERC (Yrs) = Estimated Remaining Contribution; TQRA = Tree Quality Category Rating; RPA (m²) = Root Protection Area (m²) Recommended works should be carried out to the <i>British Standard Recommendations for Tree Work, BS 3998:2010</i>															
Tree No.	Species	Dbh (mm)	Height (m)	Age	Crown Spread				Crown C	Cond R	Comments and Preliminary Management Recommendations	ERC (Yrs)	TQCR	RPA (m²)	RPA Circle Radius (m)
					N	E	S	W							
T1	Hornbeam	450	11	EM	6	5	6	6	2	B/C	A co-dominant specimen within small group of planting. Reasonable form but showing signs of decline.	10+	C2	91.61	5.40
T2	Cherry	410	7	M	6	6	4	6	1.5	B	A co-dominant specimen within small group of planting. Some crown suppression and branch stubs present from previous pruning. Several stem wounds and minor cavities.	10+	C2	76.05	4.92
T3	Sycamore	350	11	EM	5	5	6	4	2	B	A reasonable specimen located on boundary forked at 3m. Large soil holes around base with exposed roots possibly due to previous flood damage. - Fill in holes with top soil.	20+	B2	55.42	4.20
T4	Bird Cherry	180	6	EM	5	4	3	2	1	B	A suppressed specimen within dense shrubbery. Heavy stem lean.	10+	C2	14.66	2.16
G1	Group - Cypress, Laurel, Berberis & Hawthorn	<100	<5	SM-EM	3	3	3	3	0	C	A linear group of mainly shrub planting located on boundary on edge of existing car park.	10+	C2	<4.52	<1.20
T5	Norway Maple	440	12	EM	6	2	5	7	2	B/C	A co-dominant specimen located in planting pit within existing car park arrangement. Exhibits major asymmetry and several stem wounds form previous pruning that are becoming decayed. Some decline in crown and stem and branch damage.	10+	C2	87.58	5.28
T6	Norway Maple	470	11	EM	6	7	6	5	4	B	A co-dominant specimen located in planting pit within existing car park arrangement. Exhibits minor asymmetry and several stem wounds form previous pruning. Some lower branch damage within crown due to previous flood works.	20+	B2	99.93	5.64
T7	Goat Willow	500 comb	11	M	7	7	5	4	3	B/C	A multi-stemmed specimen forked near base located at bottom of steep bank area. Typical scrub form.	10+	C2	<113.10	<6.00
G2	Group - 4 Goat Willow, 1 Ash & 1 Hawthorn	<500	<12	M	7	7	7	7	2	B/C	A scrub bank area with self-sown specimens pre-dominantly multi-stemmed Willow. Future coppicing would be beneficial.	10+	C2	<113.10	<6.00
T8	London Plane	520	14	EM	6	5	8	7	2	B	A co-dominant specimen located in planting pit within existing car park arrangement. Exhibits minor stem lean and several stem cavities form previous failures. Likelihood of further failure.	10+	C2	122.33	6.24

Arboricultural Data Sheet: Former Waterside Pub, Kay Street, Summerseat, Bury											Date of Survey: 13/02/23	Weather: Dry & bright		Surveyor: PM	
Crown C = Crown Clearance; Cond R = Condition Rating; ERC (Yrs) = Estimated Remaining Contribution; TQRA = Tree Quality Category Rating; RPA (m²) = Root Protection Area (m²) Recommended works should be carried out to the <i>British Standard Recommendations for Tree Work, BS 3998:2010</i>															
Tree No.	Species	Dbh (mm)	Height (m)	Age	Crown Spread				Crown C	Cond R	Comments and Preliminary Management Recommendations	ERC (Yrs)	TQCR	RPA (m²)	RPA Circle Radius (m)
					N	E	S	W							
T9	Goat Willow	400	10	M	6	2	0	7	0	C	A scrub poor specimen located on bottom of bank area. Previously collapsed - Cut to form Coppice.	0-5	U	72.38	4.80
T10	Sycamore	600	15	M	9	5	6	8	5	B	A large dominant specimen located on higher ground exhibiting minor crown asymmetry and good vigour. Minor deadwood and branch stubs present.	20+	B2	162.86	7.20
T11	Sycamore	570	15	EM	7	6	4	7	3	B/C	A multi-stemmed self-sown specimen with poor structural form located on edge of bank area.	10+	C2	146.98	6.84
T12	Sycamore	490	15	EM	8	5	4	5	2.5	B	A self-sown one-sided specimen with poor forked at 2m located on bottom edge of bank area. Poor form.	10+	C2	108.62	5.88
T13	Sycamore	480	15	EM	6	6	6	5	2	B	A co-dominant specimen located on edge of slope and copse with minor crown asymmetry. Forked at 2m with reasonable union.	20+	B2	104.23	5.76
T14	Sycamore	530	15	EM	6	4	3	5	2	C	A co-dominant specimen with severe stem damage possibly due to previous fire. - Fell or remove crown to make safe.	5-10	U	127.08	6.36
T15	Sycamore	480	14	EM	5	4	3	3	2	C	A co-dominant specimen with severe stem damage possibly due to previous fire. - Fell or remove crown to make safe.	5-10	U	104.23	5.76
G3	Group - Sycamore, Hawthorn & Elm	<500	<15	EM	4	4	4	4	1	B	A self -sown group on bank area pre-dominantly Sycamore. Slight overhang into site. Some future minor thinning of lesser stems would be beneficial to improve light to the bank area.	20+	B2	<113.10	<6.00
T16	Sycamore	310	11	EM	4	3	2	3	1.5	B	A minor specimen growing at base of wall of steps. Reasonable vigour but low potential.	10+	C2	43.47	3.72
T17	Ash	220	8	SM	4	4	0	4	5	B	Located in raised planting area with major lean on river side. Self-sown scrub. Signs of Ash Dieback.	5-10	U	21.90	2.64
T18	Ash	400	8	SM	4	4	4	4	2	B	A self-sown scrub tree forked at base located on retaining wall. Signs of Ash Dieback.	5-10	U	72.38	4.80
T19	Lawson Cypress	470	10	EM	2	2	2	2	2	B	Exhibits reasonable form located just to rear of retaking wall. Forked at base. Previously crown lifted.	10+	C2	99.93	5.64
T20	Lawson Cypress	400	10	EM	2	2	2	2	2	B	Exhibits reasonable form located just to rear of retaking wall. Previously crown lifted.	10+	C2	72.38	4.80
G4	Shrubs – Laurel, Berberis, Willow, Ash & Oak	<200	<10	M	2.5	2.5	2.5	2.5	0	B	Mature shrub planting on river boundary rear of retaining wall. Multi-stemmed form. Several self-sown trees growing out of wall on river side with low potential.	10+	C2	<18.10	<2.40

APPENDIX C – Key References

1. *British Standard BS 5837: (2012) Trees in relation to design, demolition and construction - Recommendations. ISBN 978-0-580-69917-7*
2. *Lonsdale, D. (199) Principles of tree hazard assessment and management, Research for amenity trees NO. 2. HMSO, London. ISBN 0-11-753355-6*
3. *Mattheck, C. and Belier, H. (1994) The body language of trees. Research for amenity trees No. 4. HMSO, London. ISBN 0-11-753067-0*
4. *Shigo, A. L. (1989a) A new tree biology. Shigo and Trees Associates, Durham, New Hampshire ISBN 0-943563-04-6*
5. *Stouts R. G. and Winter T. G. (1994) Diagnosis of ill-health in trees, Research for amenity trees No. 2. HMSO, London. ISBN 0-11-752919-2*
6. *British Standard BS 3998: (2010) Tree Work-Recommendations. ISBN 978-0-580-53777-6*

APPENDIX D

NJUG 10 Section 4.0

NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees

Telecommunications Code (Schedule 2). Paragraph 19 of the Telecommunications Code enables operators to require the lopping of trees which overhang the street and obstruct or interfere with the working of their lines.

4. HOW TO AVOID DAMAGE TO TREES

This section gives general guidance on methods of work to minimise damage to trees. The local authority (or for privately owned trees, the owner or their agent), should be consulted at an early stage prior to the commencement of any works. This will reduce the potential for future conflict between trees and apparatus.

4.1 Below Ground

Wherever trees are present, precautions should be taken to minimise damage to their root systems. As the shape of the root system is unpredictable, there should be control and supervision of any works, particularly if this involves excavating through the surface 600mm, where the majority of roots develop.

4.1.1 Fine Roots

Fine roots are vulnerable to desiccation once they are exposed to the air. Larger roots have a bark layer which provides some protection against desiccation and temperature change. The greatest risk to these roots occurs when there are rapid fluctuations in air temperature around them e.g. frost and extremes of heat. It is therefore important to protect exposed roots where a trench is to be left open overnight where there is a risk of frost. In winter, before leaving the site at the end of the day, the exposed roots should be wrapped with dry sacking. This sacking must be removed before the trench is backfilled.

4.1.2 Precautions

The precautions referred to in this section are applicable to any excavations or other works occurring within the Prohibited or Precautionary Zones as illustrated in Figure 1 – ‘Tree Protection Zone’.

4.1.3 Realignment

Whenever possible apparatus should always be diverted or re-aligned outside the Prohibited or Precautionary Zones. Under no circumstances can machinery be used to excavate open trenches within the Prohibited Zone.

NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees

The appropriate method of working within the Precautionary Zone should be determined in consultation with the local authority (or for privately owned trees the owner or their agent) and may depend on the following circumstances;

- the scope of the works (e.g. one-off repair or part of an extensive operation)
- degree of urgency (e.g. for restoration of supplies)
- knowledge of location of other apparatus
- soil conditions
- age, condition, quality and life expectancy of the tree

Where works are required for the laying or maintenance of any apparatus within the Prohibited or Precautionary Zones there are various techniques available to minimise damage.

Acceptable techniques in order of preference are;

a) Trenchless

Wherever possible trenchless techniques should be used. The launch and reception pits should be located outside the Prohibited or Precautionary Zones. In order to avoid damage to roots by percussive boring techniques it is recommended that the depth of run should be below 600mm. Techniques involving external lubrication of the equipment with materials other than water (e.g. oil, bentonite, etc.) must not be used when working within the Prohibited Zone. Lubricating materials other than water may be used within the Precautionary Zone following consultation and by agreement.

b) Broken Trench - Hand-dug

This technique combines hand dug trench sections with trenchless techniques if excavation is unavoidable. Excavation should be limited to where there is clear access around and below the roots. The trench is excavated by hand with precautions taken as for continuous trenching as in (c) below. Open sections of the trench should only be long enough to allow access for linking to the next section. The length of sections will be determined by local conditions, especially soil texture and cohesiveness, as well as the practical needs for access. In all cases the open sections should be kept as short as possible and outside of the Prohibited Zone.

NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees

c) Continuous Trench - Hand-dug

The use of this method must be considered only as a last resort if works are to be undertaken by agreement within the Prohibited Zone. The objective being to retain as many undamaged roots as possible.

Hand digging within the Prohibited or Precautionary zones must be undertaken with great care requiring closer supervision than normal operations.

After careful removal of the hard surface material digging must proceed with hand tools. Clumps of roots less than 25mm in diameter (including fibrous roots) should be retained in situ without damage. Throughout the excavation works great care should be taken to protect the bark around the roots.

All roots greater than 25mm diameter should be preserved and worked around. These roots must not be severed without first consulting the owner of the tree or the local authority tree officer / arboriculturist. If after consultation severance is unavoidable, roots must be cut back using a sharp tool to leave the smallest wound.

4.1.5 Backfilling

- Any reinstatement of street works in the United Kingdom must comply with the relevant national legislation (see: **Volume 6 – ‘Legislation and Bibliography’**). In England this relates to the requirements of the code of practice – ‘Specification for the Reinstatement of Openings in Highways’ approved under the New Roads and Street Works Act 1991. Without prejudice to the requirements relating to the specification of materials and the standards of workmanship, backfilling should be carefully carried out to avoid direct damage to roots and excessive compaction of the soil around them.
- The backfill should, where possible, include the placement of an inert granular material mixed with top soil or sharp sand (not builder’s sand) around the roots. This should allow the soil to be compacted for resurfacing without damage to the roots securing a local aerated zone enabling the root to survive in the longer term.
- Backfilling outside the constructed highway limits should be carried out using the excavated soil. This should not be compacted but lightly “tamped” and usually left slightly proud of the surrounding surface to allow natural settlement. Other materials should not be incorporated into the backfill.

NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees

4.1.6 Additional Precautions near Trees

- Movement of heavy mechanical plant (excavators etc.) must not be undertaken within the Prohibited Zone and should be avoided within the Precautionary Zone, except on existing hard surfaces, in order to prevent unnecessary compaction of the soil. This is particularly important on soils with a high proportion of clay. Spoil or material must not be stored within the Prohibited Zone and should be avoided within the Precautionary Zone.
- Where it is absolutely necessary to use mechanical plant within the Precautionary Zone care should be taken to avoid impact damage to the trunk and branches. A tree must not be used as an end-stop for paving slabs or other materials nor for security chaining of mechanical plant. If the trunk or branches of a tree are damaged in any way advice should be sought from the local authority tree officer / arboriculturist.

See TABLE 1 –‘Prevention of Damage to Trees Below Ground’ below for summary details regarding causes and types of damage to trees and the implications of the damage and the necessary precautions to be taken to avoid damage.

APPENDIX E

Site Notice For Protective Fencing



TREE PROTECTION AREA KEEP OUT!

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND ARE SUBJECTS OF A
TREE PRESERVATION ORDER
(TOWN & COUNTRY PLANNING ACT 1990)

CONTRAVENTION OF TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL PROSECUTION

THE FOLLOWING **MUST** BE OBSERVED BY ALL PERSONS:-

- THE PROTECTIVE FENCING MUST NOT BE REMOVED
- NO PERSON SHALL ENTER THE PROTECTED AREA
- NO MACHINE OR PLANT SHALL ENTER THE PROTECTED AREA
- NO MATERIALS SHALL BE STORED IN THE PROTECTED AREA
- NO SPOIL SHALL BE DEPOSITED IN THE PROTECTED AREA
- NO EXCAVATION SHALL OCCUR IN THE PROTECTED AREA


**ANY INCURSION INTO THE PROTECTED AREA MUST BE
WITH THE WRITTEN PERMISSION OF THE LOCAL PLANNING AUTHORITY**

APPENDIX F – Site Plans

Trees Constraints Plan

Development Layout Plan

Tree Protection Plan

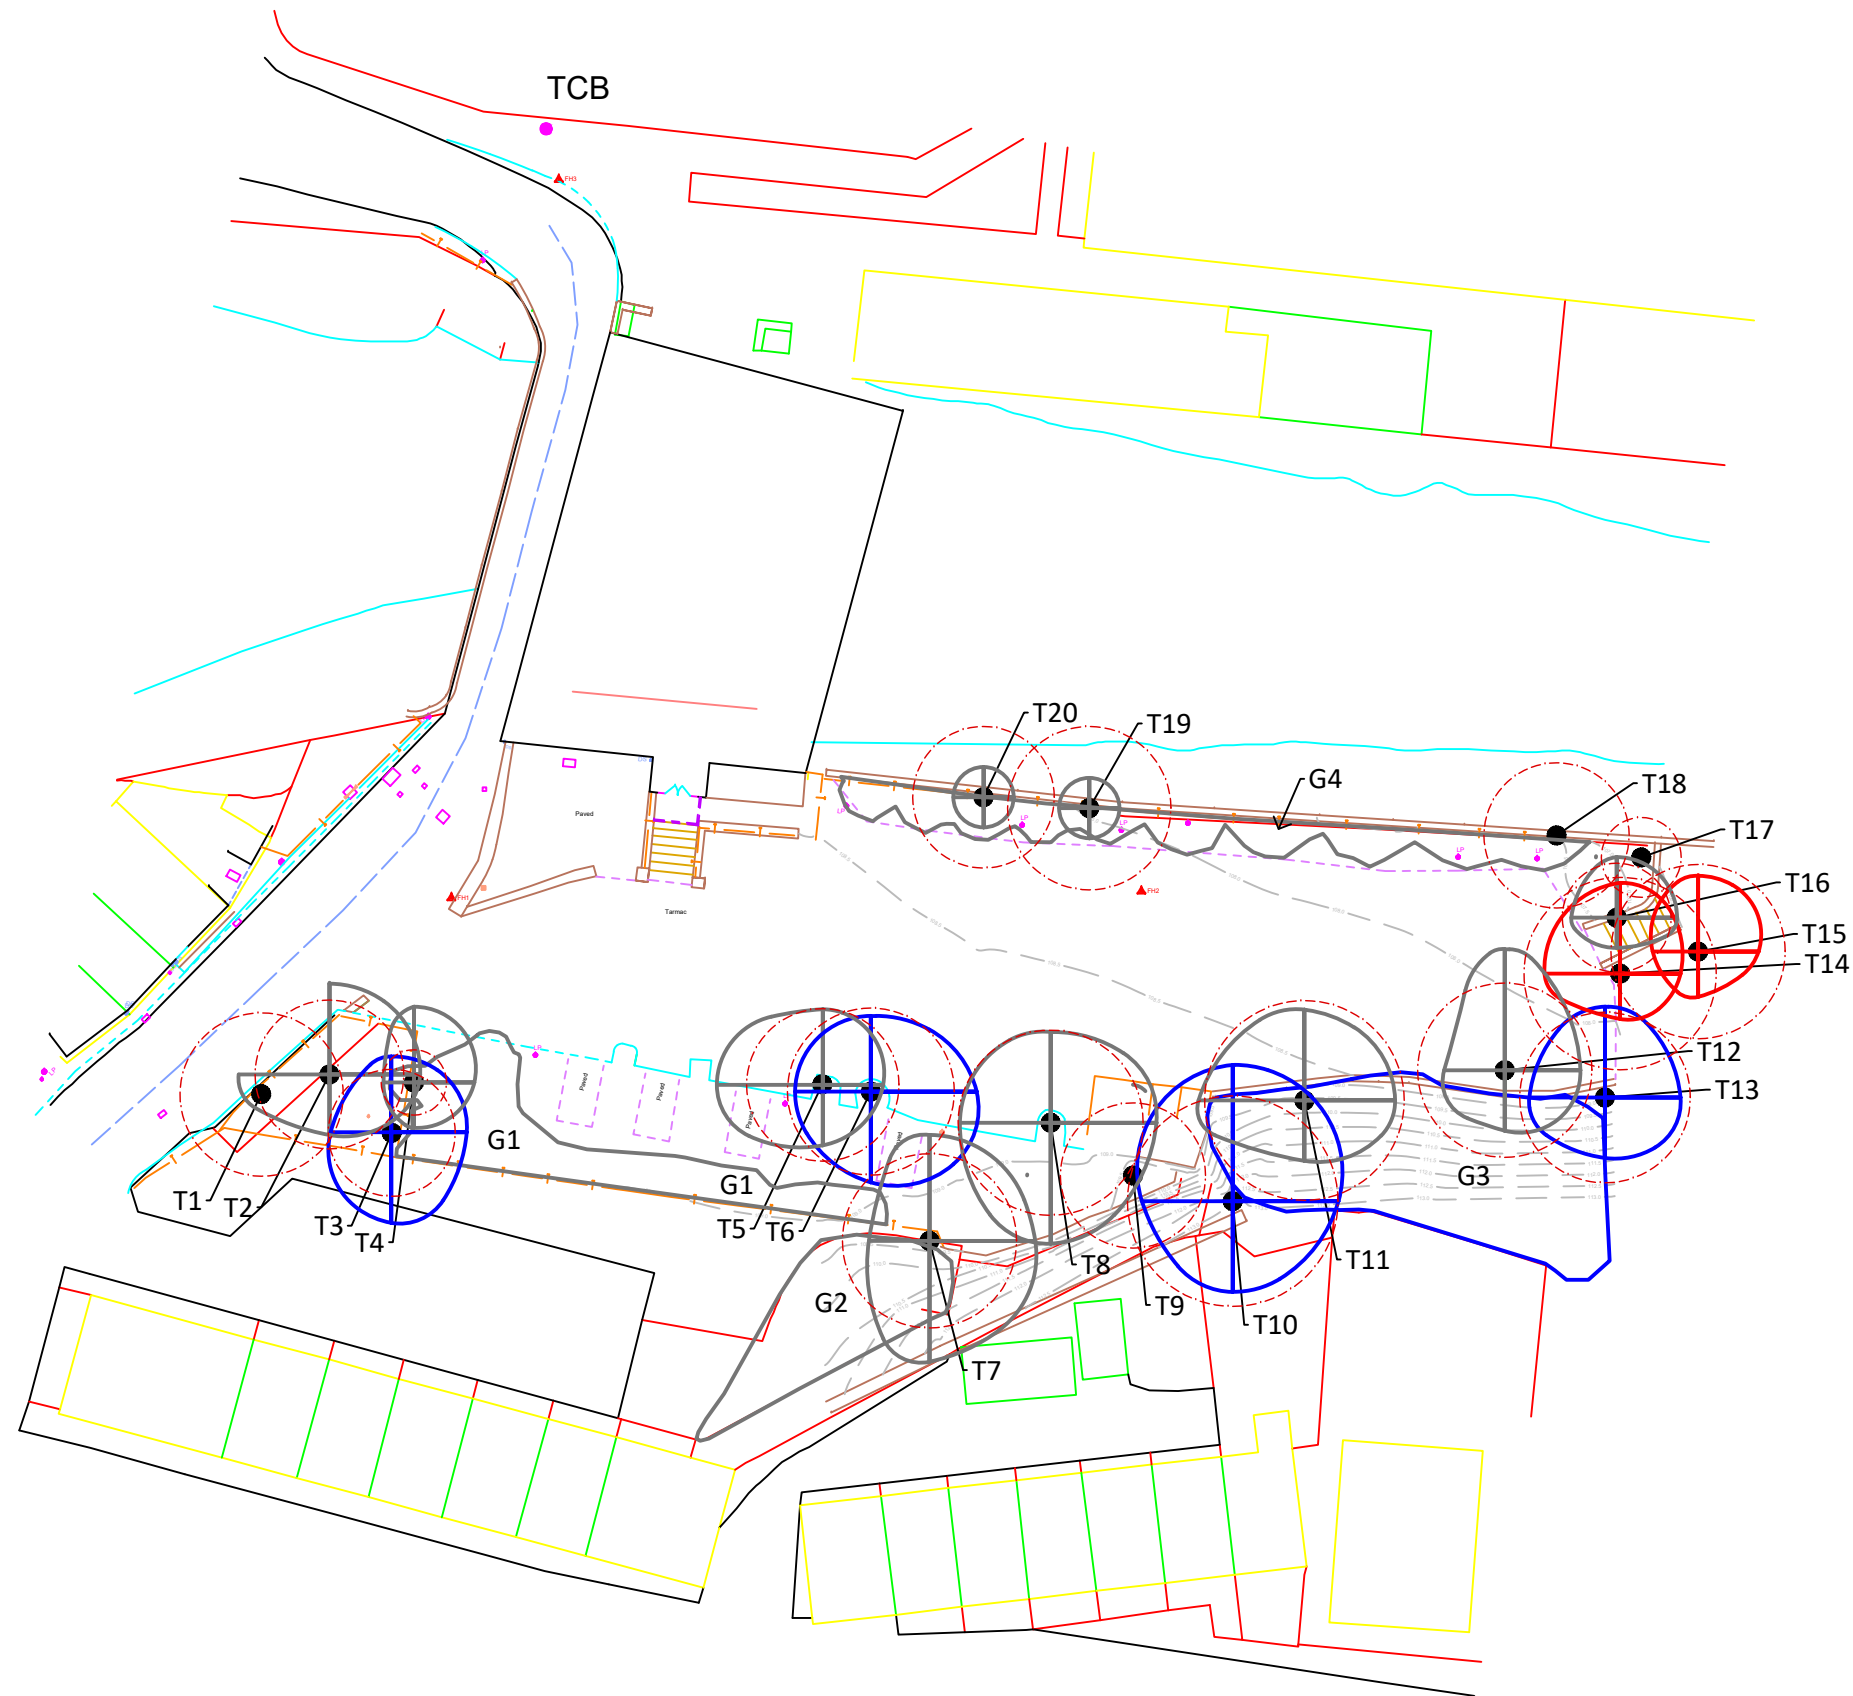

KEY

TREE SURVEY

T1

Retention Category A trees and groups of high quality

T1

Retention Category B trees and groups of moderate quality

T1

Retention Category C trees and groups of low quality

T1

Category U trees and groups of poor quality

Root Protection Areas: Calculated inline with BS5837:2012 to show a circular RPA which does not take into consideration site conditions

Tree Protection Fencing

Areas of no Dig Construction



DEP LANDSCAPE ARCHITECTURE LTD

BLACKFRIARS HOUSE, PARSONAGE
MANCHESTER, M3 2JA
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk

Client
Kinglsey Properties

Project
Former Waterside Pub, Summerseat

Description
Tree Constraints Plan

Status
PLANNING

Scale
1/500@A3

Drawn
PM

Job number
4014

Drawing number
01


Date
27.02.23

Revision
x

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement. Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawing to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.

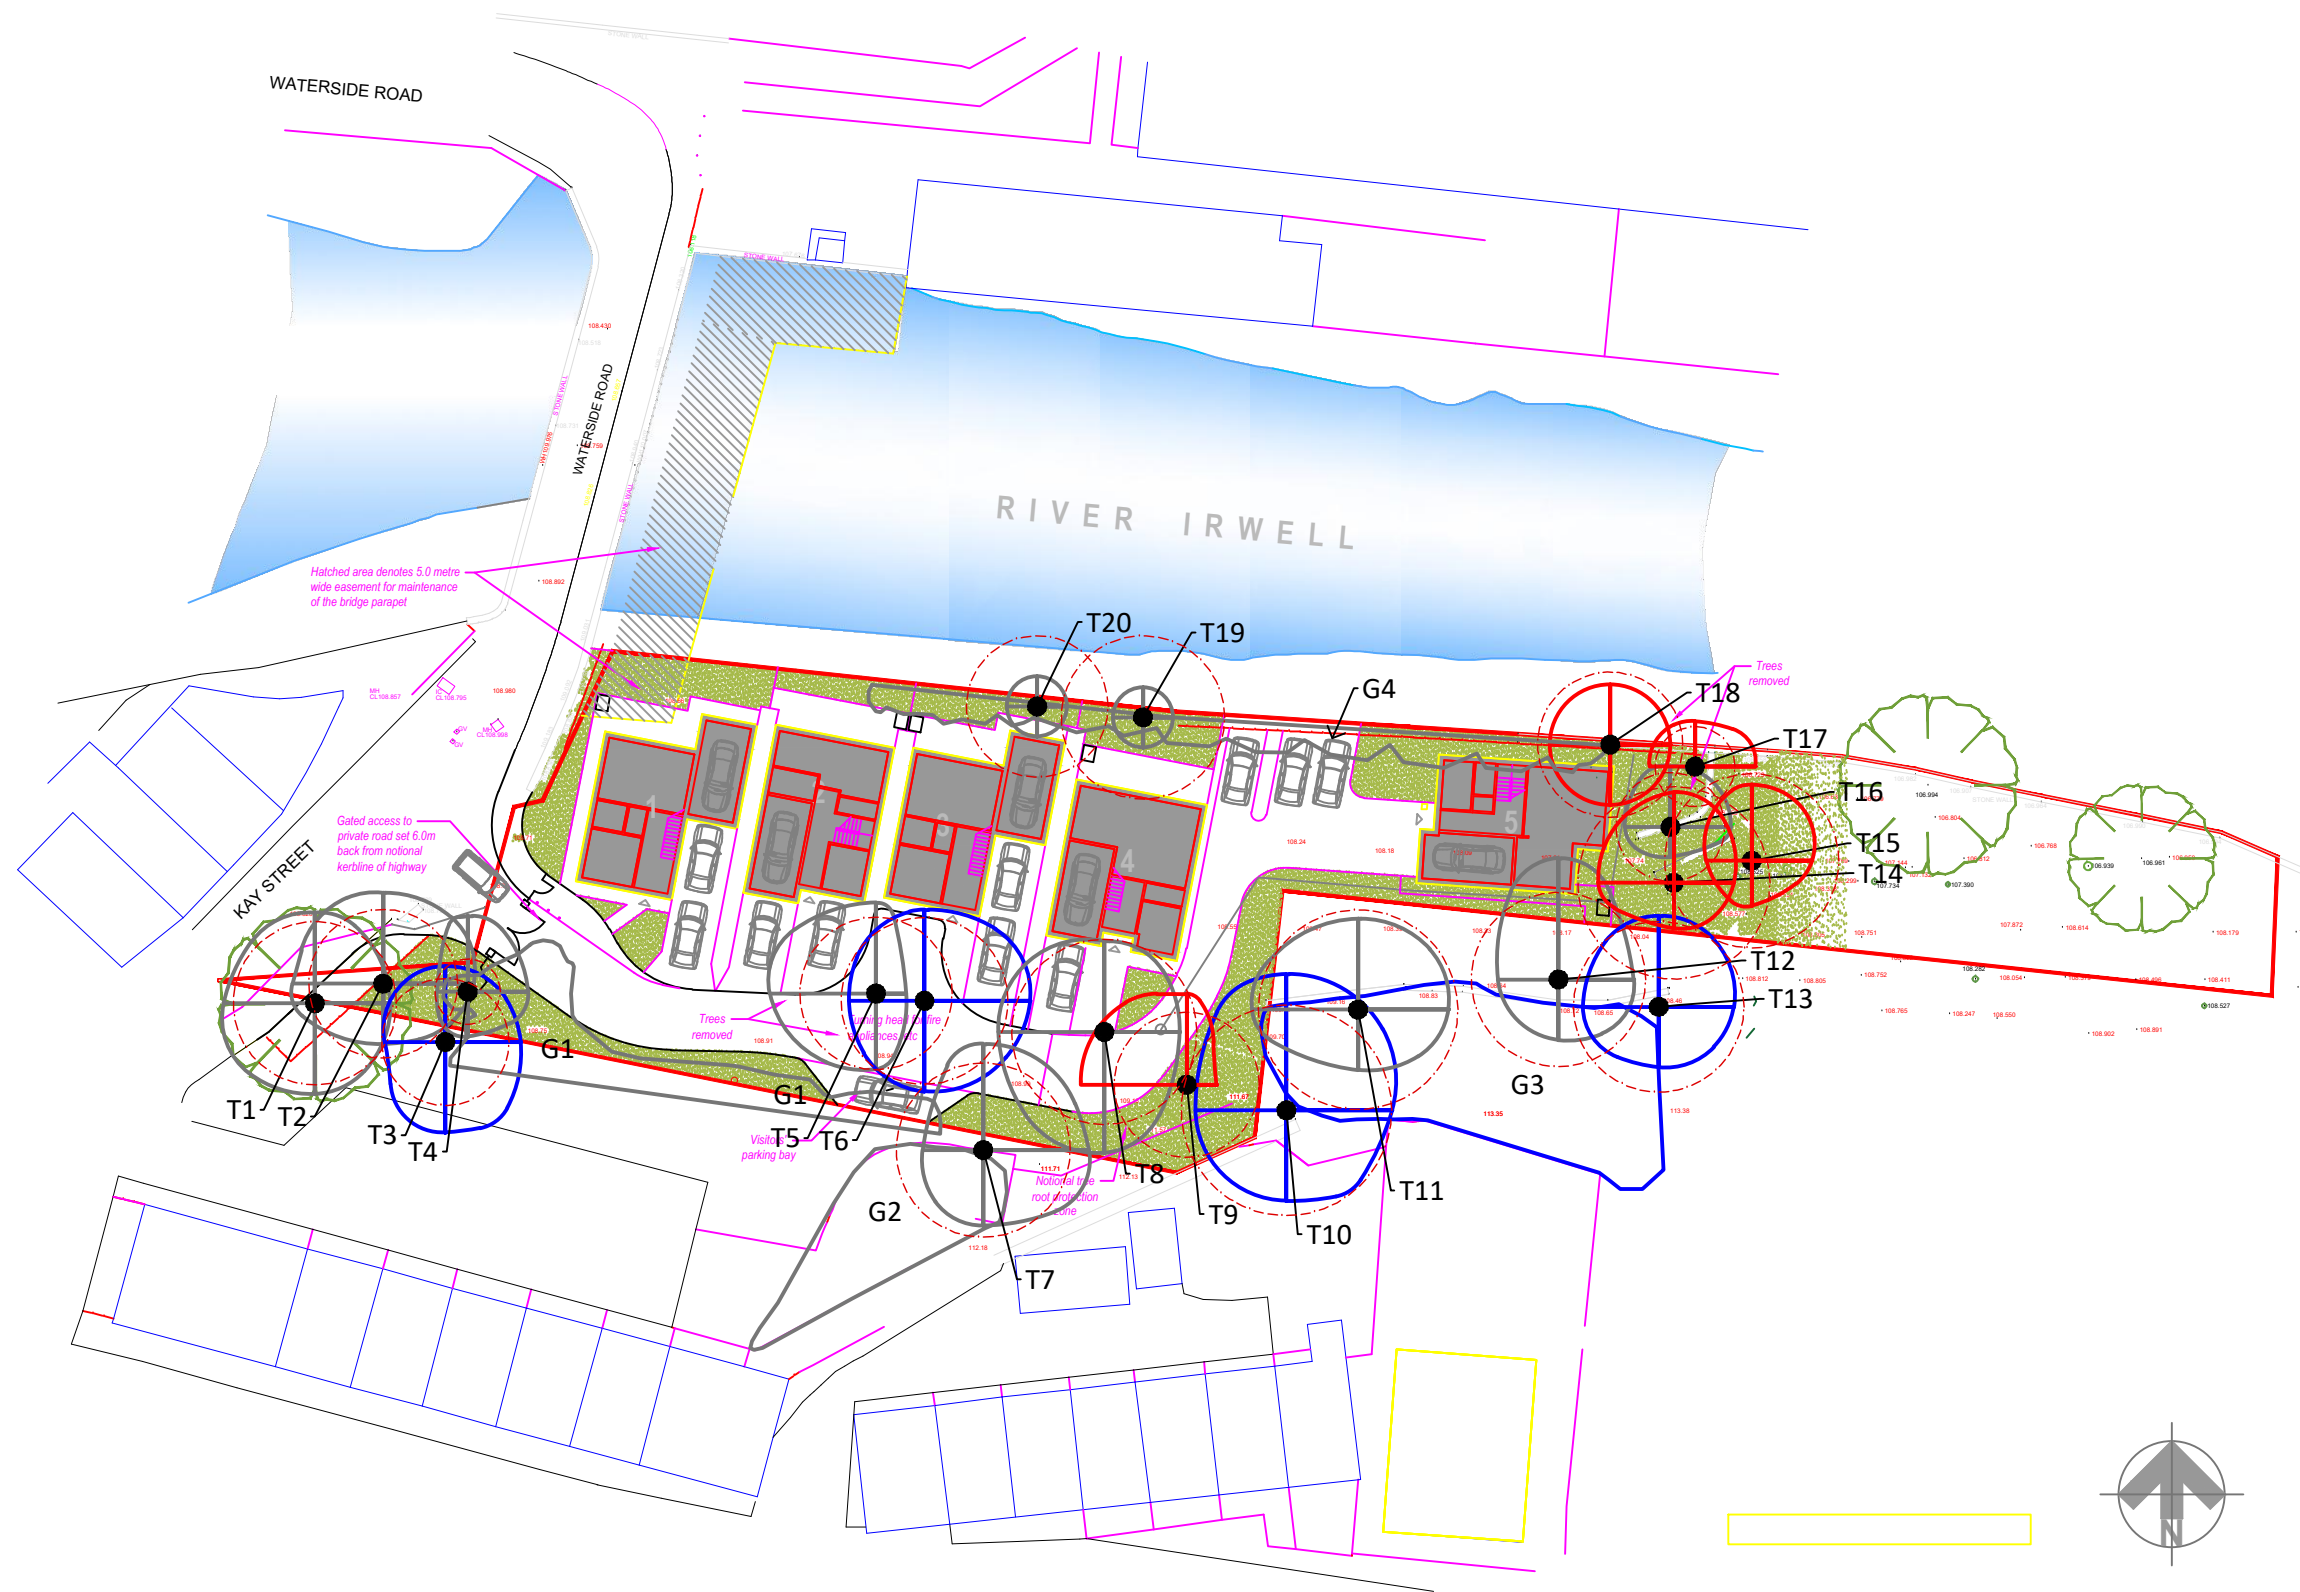

KEY

TREE SURVEY

- T1 Retention Category A trees and groups of high quality
- T1 Retention Category B trees and groups of moderate quality
- T1 Retention Category C trees and groups of low quality
- T1 Category U trees and groups of poor quality
- Root Protection Areas: Calculated inline with BS5837:2012 to show a circular RPA which does not take into consideration site conditions



DEP LANDSCAPE ARCHITECTURE LTD

BLACKFRIARS HOUSE, PARSONAGE
MANCHESTER, M3 2JA
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk

Client

Kingsey Properties

Project

Former Waterside Pub, Summerseat

Description

Development Layout Plan

Status

PLANNING

Scale

1/500@A3

Drawn

PM

Job number

4014 02

Drawing number


Date

27.02.23 C

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement; Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.

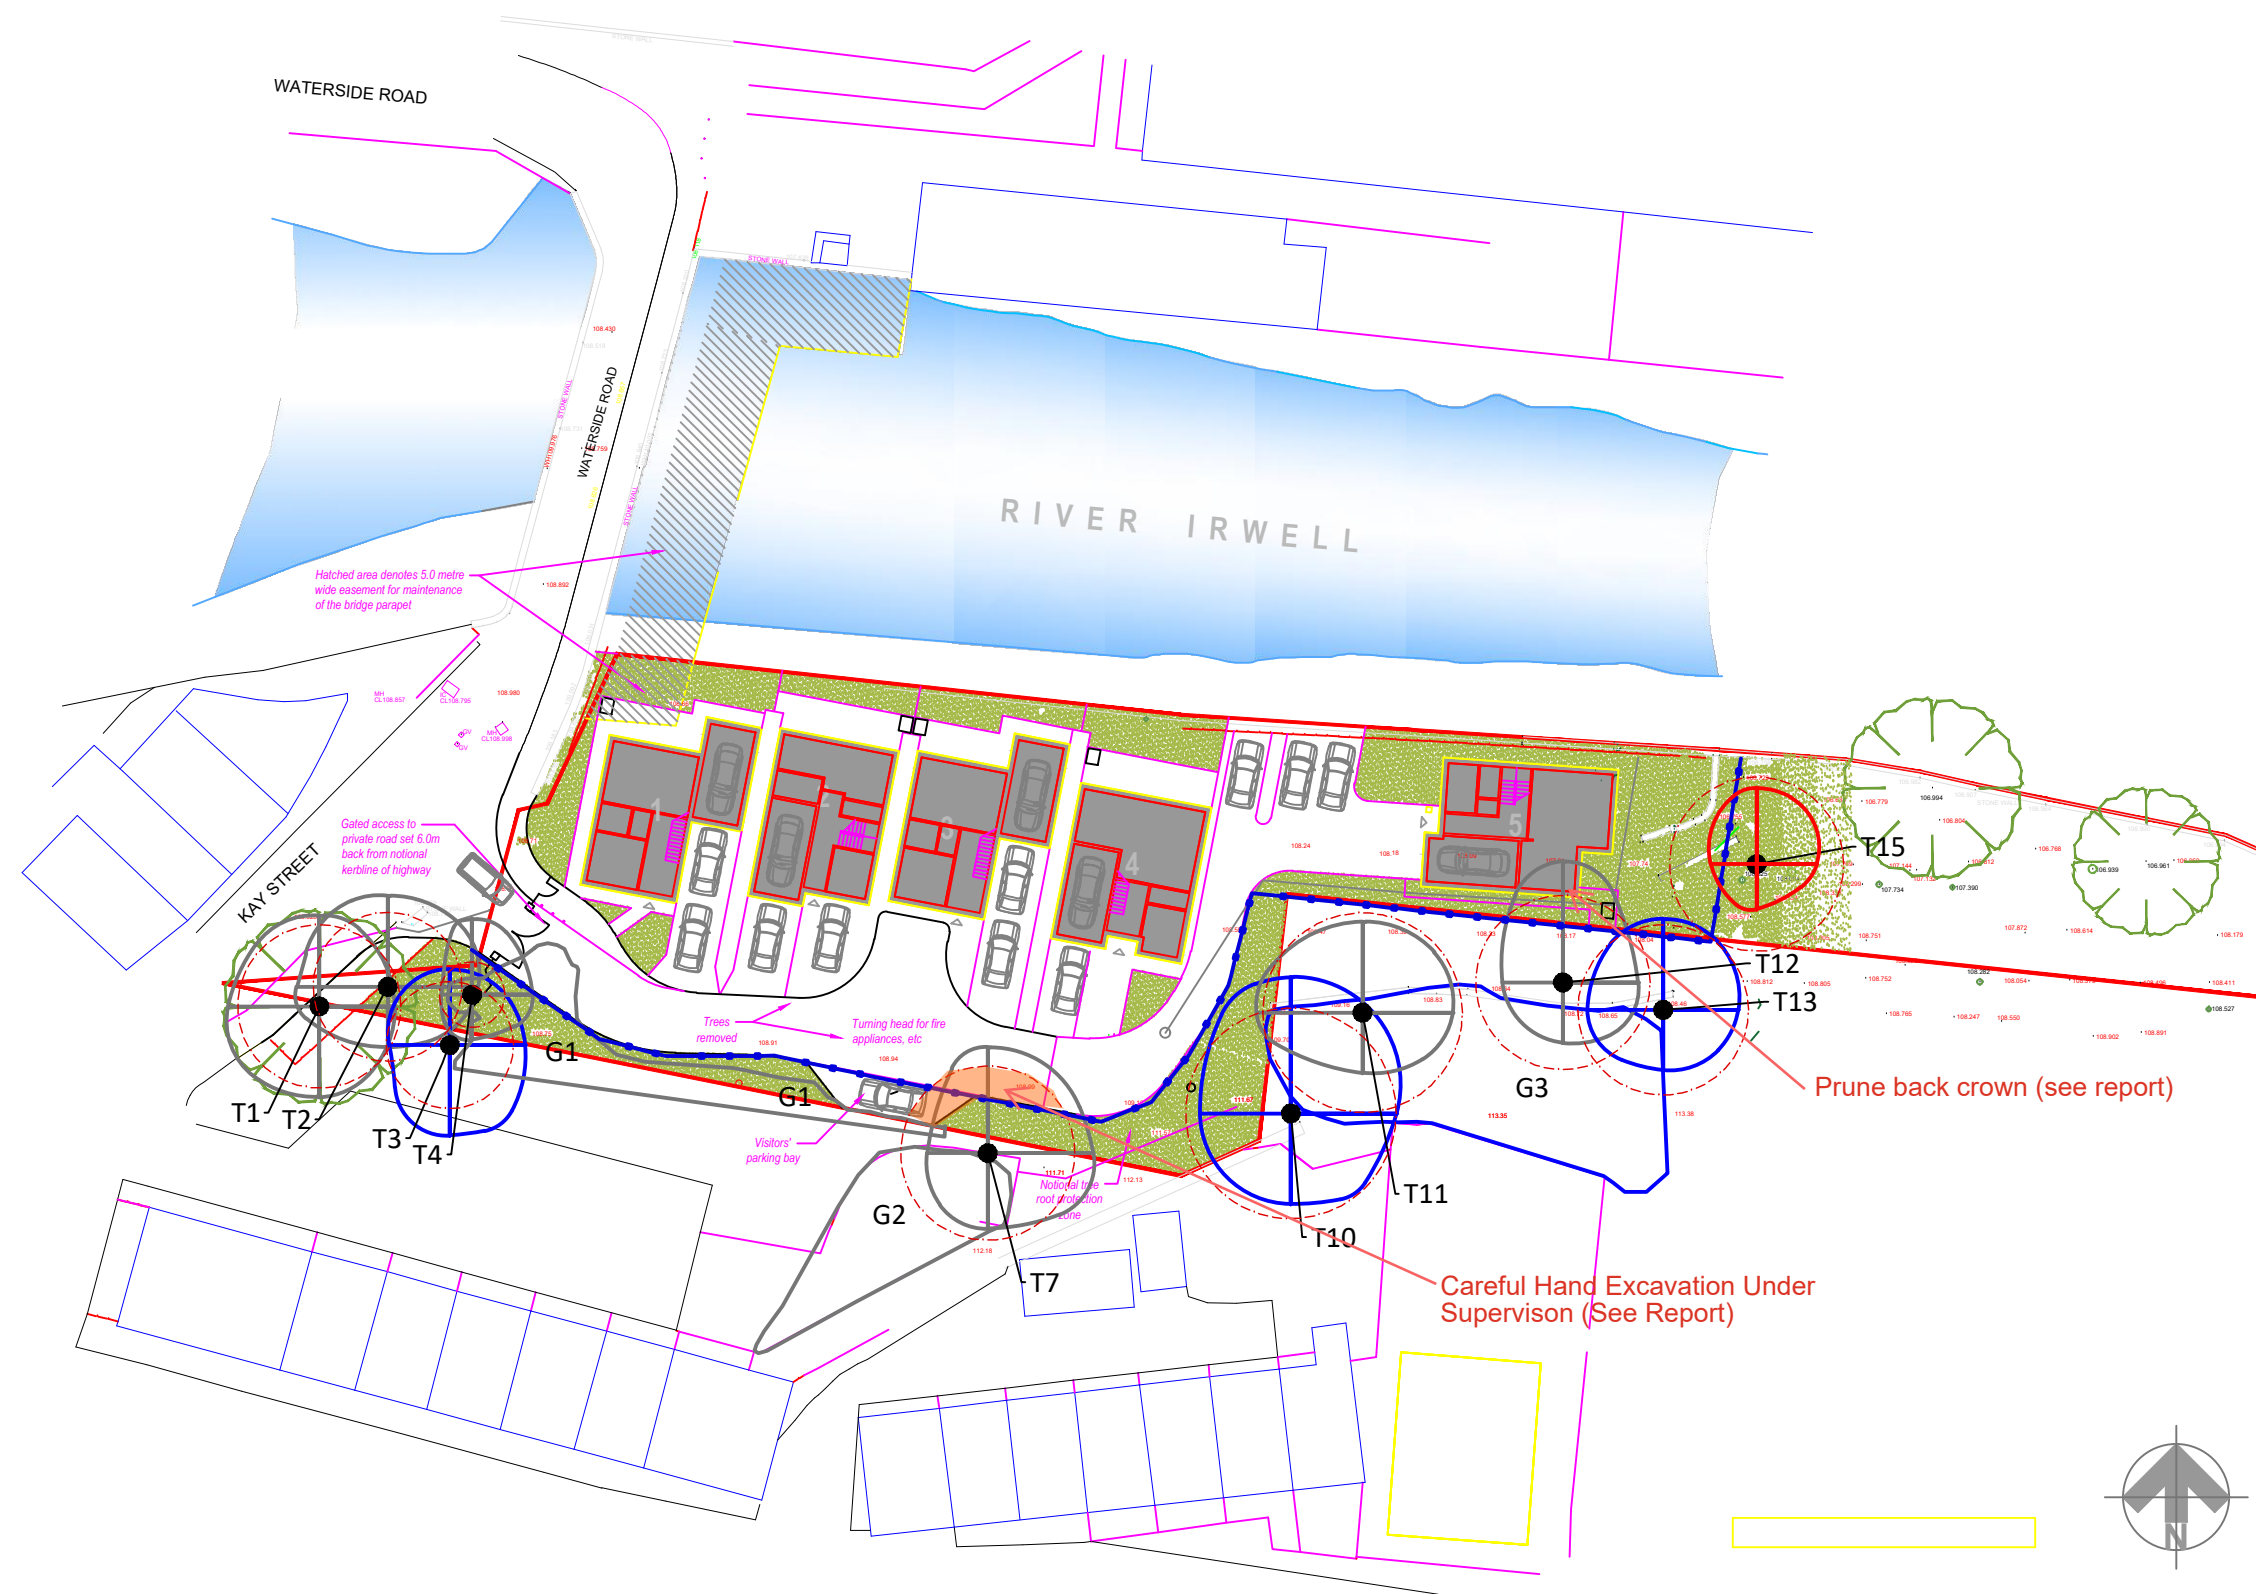

KEY

TREE SURVEY

-  Retention Category A trees and groups of high quality
-  Retention Category B trees and groups of moderate quality
-  Retention Category C trees and groups of low quality
-  Category U trees and groups of poor quality
-  Root Protection Areas: Calculated inline with BS5837:2012 to show a circular RPA which does not take into consideration site conditions
-  Tree Protection Fencing



DEP LANDSCAPE ARCHITECTURE LTD

BLACKFRIARS HOUSE, PARSONAGE
MANCHESTER, M3 2JA
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk

Client
Kingsey Properties

Project
Former Waterside Pub, Summerseat

Description
Tree Protection Plan

Status
PLANNING

Scale	Drawn		
1/500@A3	PM		
Job number	Drawing number	Date	Revision
4014	03	17.11.24	A

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement; Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.